


datavideo

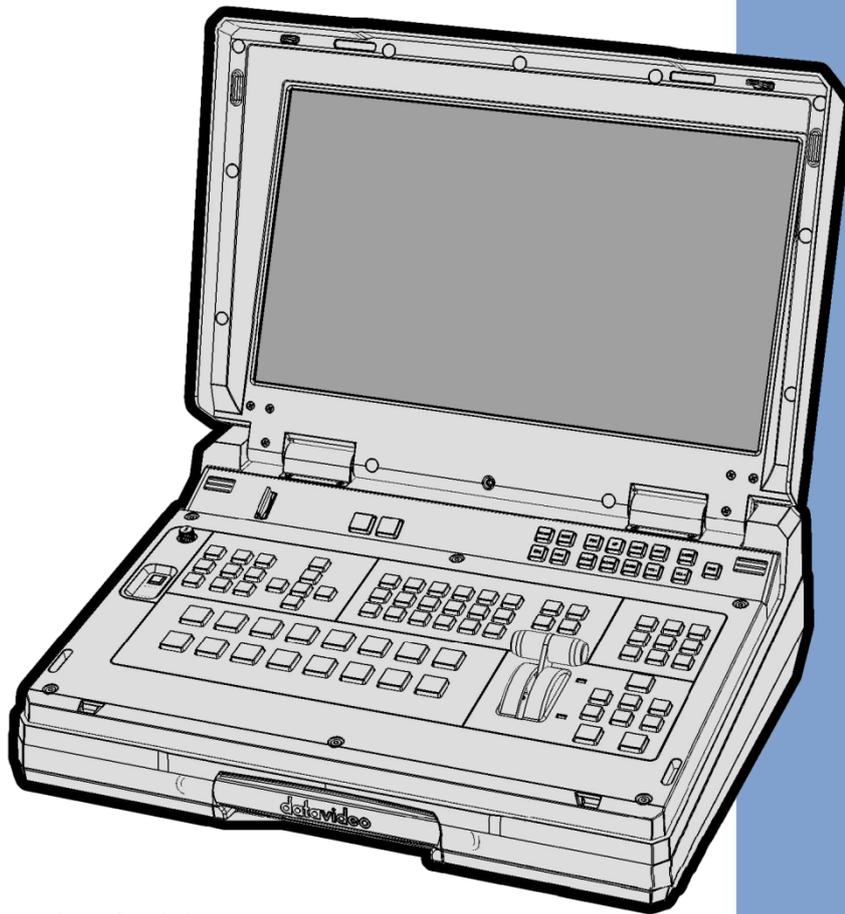

**HD 6 CHANNEL
PORTABLE VIDEO
STREAMING STUDIO**

HS-1300

Instruction manual

www.datavideo.com

Contents

FCC COMPLIANCE STATEMENT	6
WARNINGS AND PRECAUTIONS	6
WARRANTY	7
<i>STANDARD WARRANTY.....</i>	7
<i>THREE YEAR WARRANTY.....</i>	7
DISPOSAL	7
CHAPTER 1 INTRODUCTION.....	8
1.1 FEATURES.....	8
1.2 SYSTEM DIAGRAM.....	9
CHAPTER 2 CONNECTIONS AND CONTROLS	10
2.1 REAR PANEL CONNECTIONS	11
2.2 SWITCHER CONTROL PANEL	13
<i>User Memory and Function Keys</i>	13
<i>Menu Control.....</i>	13
<i>Keyer Selection.....</i>	13
<i>Keyer Source.....</i>	14
<i>PIP Effect.....</i>	14
<i>Background Transition & GRAB</i>	14
<i>Wipe Border Setting.....</i>	14
<i>Wipe Transition Selection.....</i>	14
<i>Program & Preview Source Row</i>	15
<i>Transition Effect</i>	16
<i>Audio Control.....</i>	17
2.3 MONITOR CONTROL PANEL	17
2.4 RECORD/STREAM PANEL.....	18
CHAPTER 3 NETWORK SETUP	20
3.1 SWITCHER SETUP WITH A WINDOWS COMPUTER	20
3.2 INSTALLING THE SWITCHER IMAGE IMPORT/EXPORT SOFTWARE TO A WINDOWS COMPUTER	21
<i>Router Based DHCP Setup</i>	22
<i>Setting the Target IP Address with the Switcher Image Import/Export Software</i>	23
CHAPTER 4 SWITCHER OSD MENU	25
4.1 OVERVIEW	25
4.2 FUNCTIONS.....	32
<i>Start.....</i>	32
<i>Transition</i>	32
<i>Wipe Effects.....</i>	32
<i>Border.....</i>	32
<i>Position.....</i>	33
<i>Matte.....</i>	33
<i>IP Address</i>	33
<i>Keyer.....</i>	33
<i>Keyer Control</i>	33
<i>Key Source</i>	34
<i>Fill Source</i>	34
<i>Mask.....</i>	34

<i>Chroma</i>	34
Keyer	34
CK Setup	34
Mask	35
<i>P-in-P</i>	35
Position	35
Border	36
Border Width	36
Crop	36
P-in-P	36
<i>P-in-P Lite</i>	36
Position	37
Border	37
Crop	37
P-in-P Lite	37
<i>Inputs</i>	37
Input 1-4	37
Freeze	38
Crosspoint	38
<i>Outputs</i>	38
Outputs	38
Audio	39
Tally Mode	39
GPI Out	39
Multiviewer	39
<i>Stills</i>	39
Load Still	40
Save Still	40
Grab Still	40
Freeze	40
<i>User Mems</i>	40
Load Memory	41
Save Memory	41
Load Clip	41
<i>Setup</i>	41
Audio Level (EBU/SMPTE/AUTO)	41
Menu Preference	42
Standard	42
Menu Mode	42
Auto Save	42
Factory Default	42
Reset Names	42
Network Default	42
Language	42
Software	42

CHAPTER 5 VIDEO STREAMING 43

5.1 STREAMING NETWORK CONNECTION AND DEVICE SEARCH	43
<i>Connecting to a DHCP Network (DHCP Mode)</i>	43
<i>Connecting to a NON-DHCP Network (Static IP)</i>	44
Default Fixed IP	44
<i>Troubleshooting the Network Connection</i>	44

Advanced Troubleshooting	47
5.2 WEB USER INTERFACE	47
<i>Status</i>	48
<i>Operation Mode</i>	49
Stream and Record Settings.....	51
<i>Storage</i>	59
<i>CG</i>	60
<i>System</i>	61
<i>File Repair</i>	65
5.3 OPERATIONS	67
<i>Video Streaming</i>	67
RTSP/TS/HLS/SRT	67
RTMP(S)	73
<i>Text Overlay Video</i>	75
5.4 STREAM AND RECORD BUTTONS.....	75
<i>Record Button</i>	76
<i>Stream Button</i>	76
<i>Record+Stream Button</i>	76
<i>Bitrate Button</i>	77
<i>Operation Mode</i>	77
5.5 RESTORING FACTORY DEFAULTS	78
5.6 FIRMWARE UPDATE	78
CHAPTER 6 ADVANCED OPERATIONS	79
6.1 STILL IMAGES	79
<i>Export/Import Still Images to/from the PC</i>	79
Installation	79
How to use.....	82
<i>Loading still images</i>	85
6.2 STINGER TRANSITION EFFECT	85
<i>Loading the existing Clip for Stinger Transition Effect</i>	85
Restoring CH6 window for Live or Still mode	86
<i>Importing the Clip for Stinger Transition Effect from the PC</i>	86
<i>How to Create the PNG Sequence for Stinger Transition Effect</i>	89
Adobe After Effects.....	89
Media Encoder CC.....	91
<i>Important things to note while creating Stinger Transition Effects</i>	94
6.3 CHROMAKEYER	95
6.4 DUAL CHROMAKEY	96
6.5 USER MEMORY	98
<i>Export/Import User Memory Preset to/from the PC</i>	98
<i>Loading User Memory Preset</i>	99
CHAPTER 7 MONITOR OSD MENU OPTIONS	100
7.1 MAIN ADJUST	101
7.2 COLOR.....	101
7.3 INFORMATION	101
7.4 SPECIAL FUNCTION	101
7.5 FACTORY RESET	102
APPENDICES	103
APPENDIX 1: FIRMWARE UPDATE PROCEDURE	103
<i>Switcher</i>	103

Video Streaming Server.....	104
Recovery Mode	104
Formatting the SD Card	105
APPENDIX 2: RECOMMENDED SD CARDS	106
APPENDIX 3: GPI CONNECTION	108
APPENDIX 4: TALLY OUTPUTS	109
APPENDIX 5: FREQUENTLY-ASKED QUESTIONS	110
APPENDIX 6: DIMENSIONS.....	112
APPENDIX 7: SPECIFICATIONS.....	113
SERVICE AND SUPPORT.....	116

Disclaimer of Product and Services

The information offered in this instruction manual is intended as a guide only. At all times, Datavideo Technologies will try to give correct, complete and suitable information. However, Datavideo Technologies cannot exclude that some information in this manual, from time to time, may not be correct or may be incomplete. This manual may contain typing errors, omissions or incorrect information. Datavideo Technologies always recommend that you double check the information in this document for accuracy before making any purchase decision or using the product. Datavideo Technologies is not responsible for any omissions or errors, or for any subsequent loss or damage caused by using the information contained within this manual. Further advice on the content of this manual or on the product can be obtained by contacting your local Datavideo Office or dealer.

FCC Compliance Statement

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

Warnings and Precautions

1. Read all of these warnings and save them for later reference.
2. Follow all warnings and instructions marked on this unit.
3. Unplug this unit from the wall outlet before cleaning. Do not use liquid or aerosol cleaners. Use a damp cloth for cleaning.
4. Do not use this unit in or near water.
5. Do not place this unit on an unstable cart, stand, or table. The unit may fall, causing serious damage.
6. Slots and openings on the cabinet top, back, and bottom are provided for ventilation. To ensure safe and reliable operation of this unit, and to protect it from overheating, do not block or cover these openings. Do not place this unit on a bed, sofa, rug, or similar surface, as the ventilation openings on the bottom of the cabinet will be blocked. This unit should never be placed near or over a heat register or radiator. This unit should not be placed in a built-in installation unless proper ventilation is provided.
7. This product should only be operated from the type of power source indicated on the marking label of the AC adapter. If you are not sure of the type of power available, consult your Datavideo dealer or your local power company.
8. Do not allow anything to rest on the power cord. Do not locate this unit where the power cord will be walked on, rolled over, or otherwise stressed.
9. If an extension cord must be used with this unit, make sure that the total of the ampere ratings on the products plugged into the extension cord do not exceed the extension cord's rating.
10. Make sure that the total amperes of all the units that are plugged into a single wall outlet do not exceed 15 amperes.
11. Never push objects of any kind into this unit through the cabinet ventilation slots, as they may touch dangerous voltage points or short out parts that could result in risk of fire or electric shock. Never spill liquid of any kind onto or into this unit.
12. Except as specifically explained elsewhere in this manual, do not attempt to service this product yourself. Opening or removing covers that are marked "Do Not Remove" may expose you to dangerous voltage points or other risks, and will void your warranty. Refer all service issues to qualified service personnel.
13. Unplug this product from the wall outlet and refer to qualified service personnel under the following conditions:
 - a. When the power cord is damaged or frayed;
 - b. When liquid has spilled into the unit;
 - c. When the product has been exposed to rain or water;
 - d. When the product does not operate normally under normal operating conditions. Adjust only those controls that are covered by the operating instructions in this manual; improper adjustment of other controls may result in damage to the unit and may often require extensive work by a qualified technician to restore the unit to normal operation;
 - e. When the product has been dropped or the cabinet has been damaged;
 - f. When the product exhibits a distinct change in performance, indicating a need for service.



Warranty

Standard Warranty


- Datavideo equipment are guaranteed against any manufacturing defects for one year from the date of purchase.
- The original purchase invoice or other documentary evidence should be supplied at the time of any request for repair under warranty.
- The product warranty period begins on the purchase date. If the purchase date is unknown, the product warranty period begins on the thirtieth day after shipment from a Datavideo office.
- All non-Datavideo manufactured products (product without Datavideo logo) have only one year warranty from the date of purchase.
- Damage caused by accident, misuse, unauthorized repairs, sand, grit or water is not covered under warranty.
- Viruses and malware infections on the computer systems are not covered under warranty.
- Any errors that are caused by unauthorized third-party software installations, which are not required by our computer systems, are not covered under warranty.
- All mail or transportation costs including insurance are at the expense of the owner.
- All other claims of any nature are not covered.
- All accessories including headphones, cables, and batteries are not covered under warranty.
- Warranty only valid in the country or region of purchase.
- Your statutory rights are not affected.

Three Year Warranty

- All Datavideo products purchased after July 1st, 2017 are qualified for a free two years extension to the standard warranty, providing the product is registered with Datavideo within 30 days of purchase.
- Certain parts with limited lifetime expectancy such as LCD panels, DVD drives, Hard Drive, Solid State Drive, SD Card, USB Thumb Drive, Lighting, Camera module, PCIe Card are covered for 1 year.
- The three-year warranty must be registered on Datavideo's official website or with your local Datavideo office or one of its authorized distributors within 30 days of purchase.



Disposal

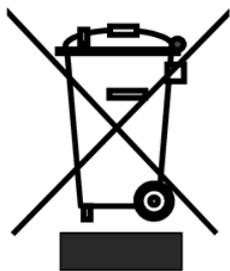

For EU Customers only - WEEE Marking

This symbol on the product or on its packaging indicates that this product must not be disposed of with your other household waste. Instead, it is your responsibility to dispose of your waste equipment by handing it over to a designated collection point for the recycling of waste electrical and electronic equipment. The separate collection and recycling of your waste equipment at the time of disposal will help to conserve natural resources and ensure that it is recycled in a manner that protects human health and the environment. For more information about where you can drop off your

waste equipment for recycling, please contact your local city office, your household waste disposal service or the shop where you purchased the product.



CE Marking is the symbol as shown on the left of this page. The letters "CE" are the abbreviation of French phrase "Conformité Européene" which literally means "European Conformity". The term initially used was "EC Mark" and it was officially replaced by "CE Marking" in the Directive 93/68/EEC in 1993. "CE Marking" is now used in all EU official documents.

Chapter 1 Introduction

HS-1300 features an easy-to-use video streaming and recording appliance for professional video producers who need to simultaneously stream a live event and record the master quality version for post-editing.


The HS-1300 is a cost effective 6 channel broadcast-quality hand-carry mobile switcher, it is designed for live events and TV programs that need to mix a variety of video and audio sources. The HS-1300 is a lightweight, portable and powerful featured mobile studio solution.

Friendly and advanced features include a 17.3-inch video monitor, which displays the multi-view. The Multi-view includes all the input sources, as well as preview and program.


1.1 Features

- Simultaneous Live Streaming & Recording
- Broadcast quality HD / SD H.264 network streaming over RTMP(S), RTSP, TS, HLS and SRT
- Support different bitrate for recording and streaming
- 6 video inputs (SDI x 4 + HDMI x 2)
- 5 Video Output: (SDI x 2 + HDMI x 3)
- 2 x XLR Analogue Audio Inputs
- Flexible Mix/Effects Processor with
 - 2 Upstream Keyers supporting Chroma Key & Linear/Luma Key
 - 2 DSK supporting Linear & Luma Key Modes
 - 1 PIP (assignable to any of the 4 keyers)
 - Wipe, Mix & Cut Transitions
 - Full M/E Preview function
- Any Input (1-6) can be used as a Frame store (Stills Store)
- XPT (Cross Point Assignment)
- Tally output
- GPI Output
- One 17.3-inch with a resolution of 1600x900 dots
- Easy to use On-screen Menu System for quick setting of parameters


1.2 System Diagram

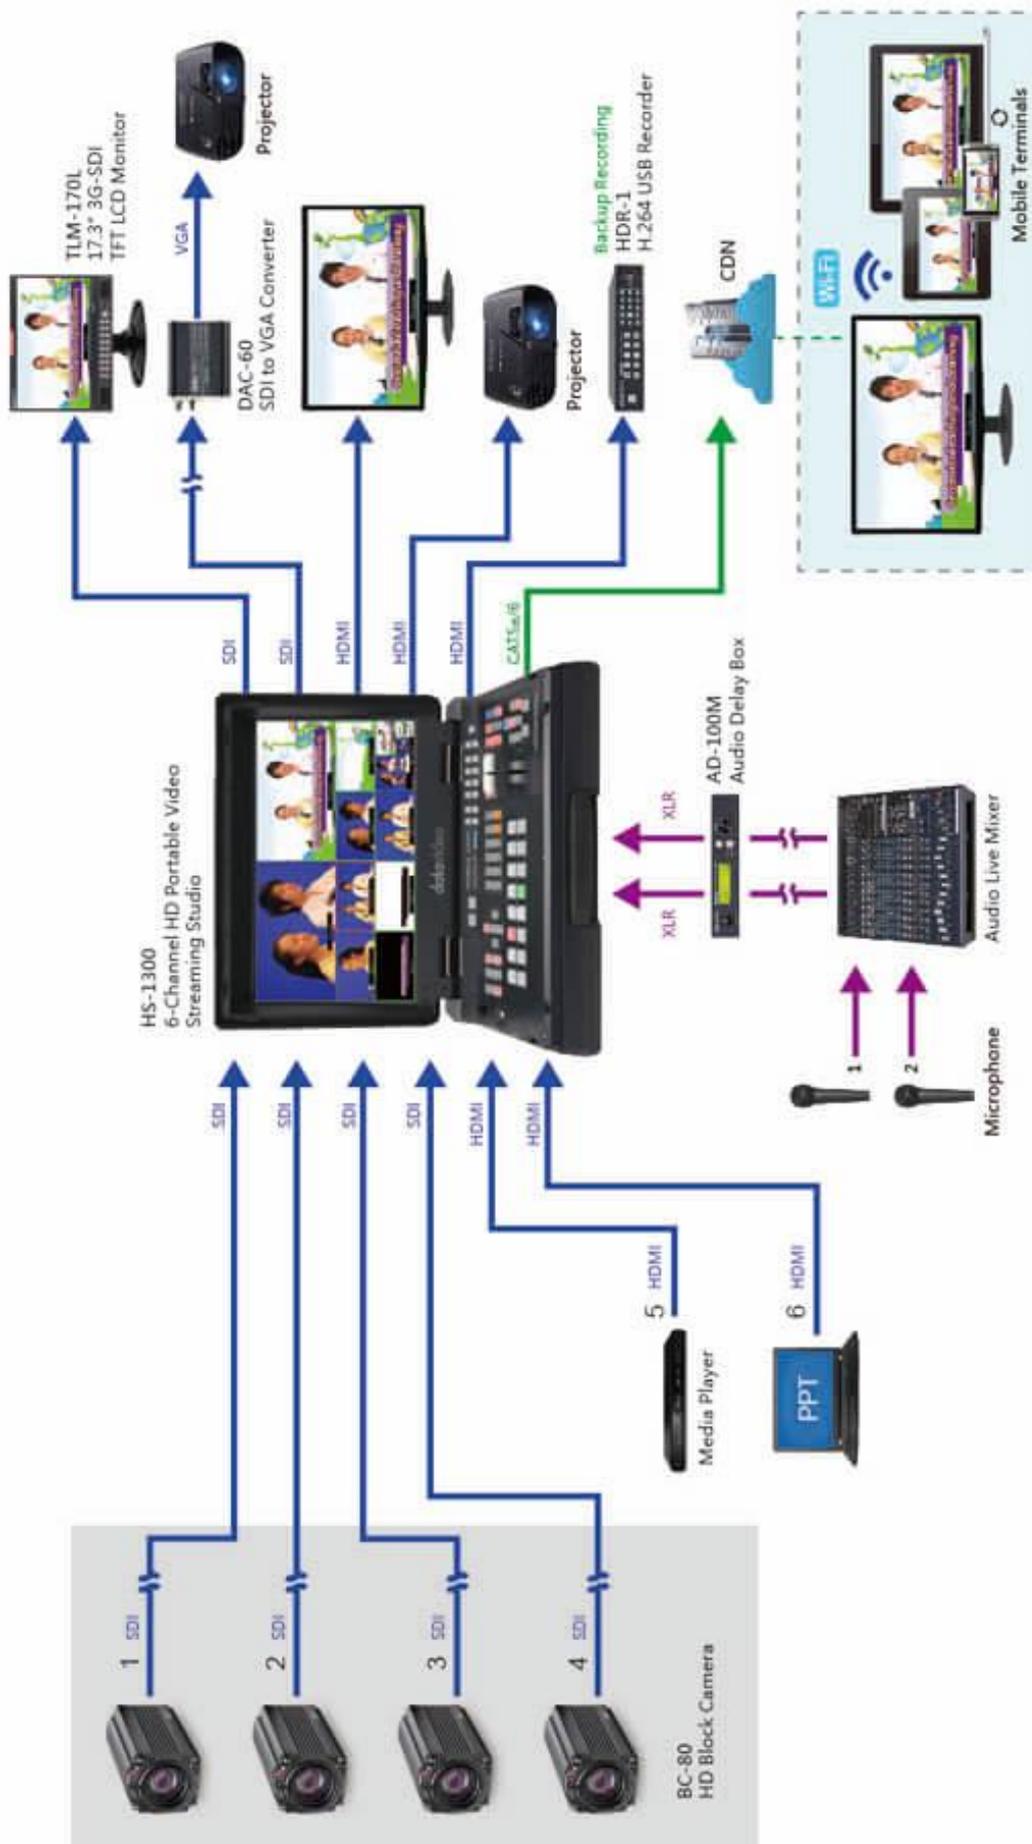

Chapter 2 Connections and Controls

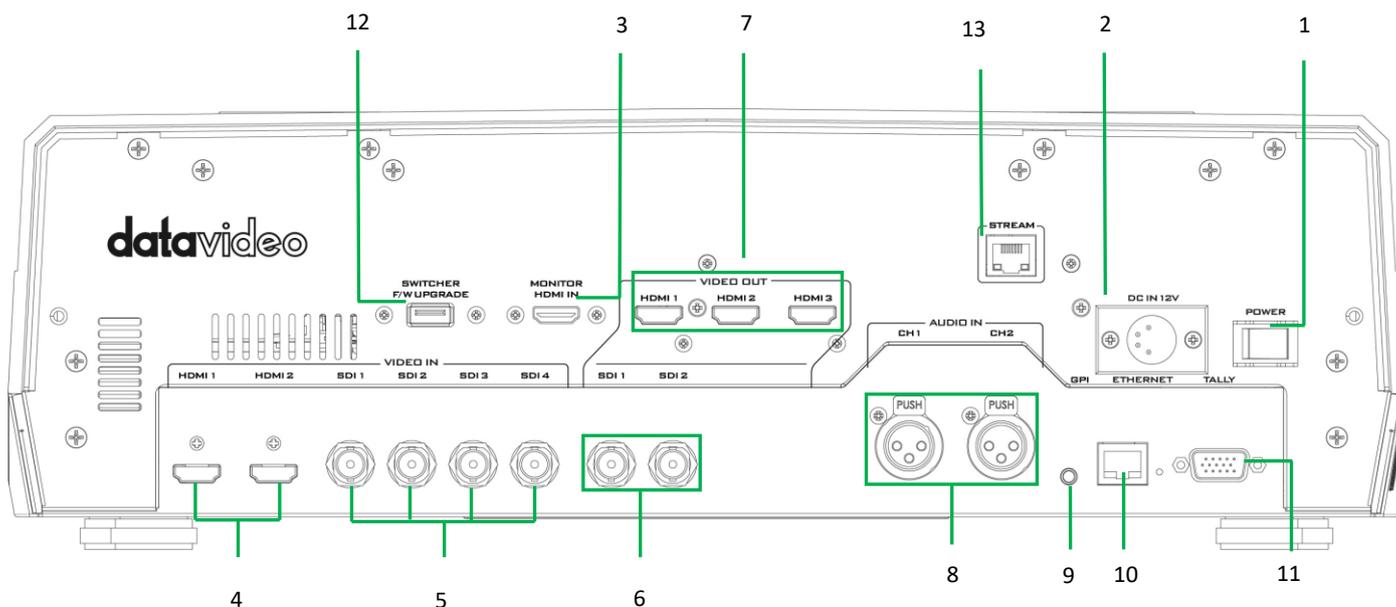


- | | |
|---|--------------------------------------|
| 1 Power Switch | 8 3 PIN XLR Audio Input 1 – 2 |
| 2 4 PIN XLR Power Input Connector | 9 GPI Output Connector |
| 3 Monitor HDMI IN (External Video Input) | 10 Ethernet Port |
| 4 HDMI Video Input 1 – 2 | 11 Tally Signal Output |
| 5 HD-SDI Video Input 1 – 4 | 12 USB Firmware Upgrade Port |
| 6 HD-SDI Video Output 1 – 2 | 13 Stream Port |
| 7 HDMI Video Output 1 – 3 | |

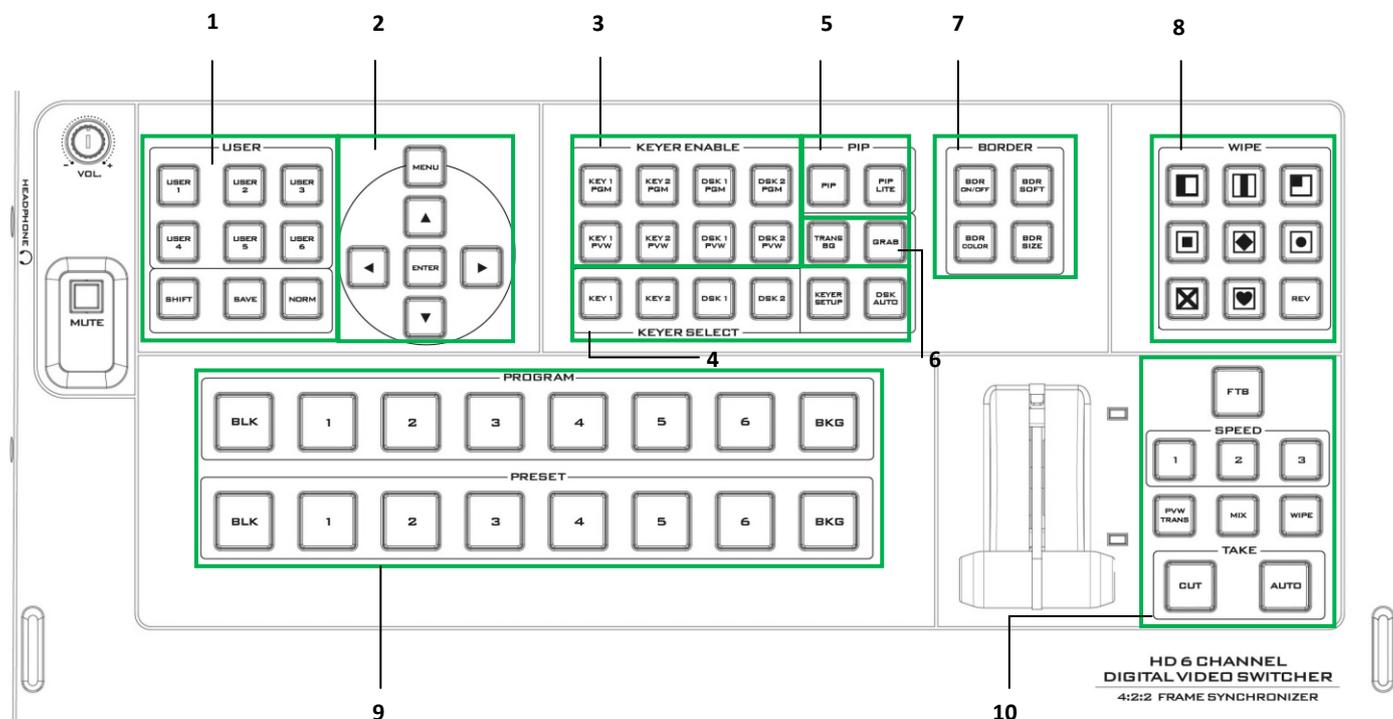

- | | |
|--------------------------------------|--|
| 1 User Memory & Function Keys | 6 Background Transition & GRAB |
| 2 Menu Control | 7 Wipe Border Setting |
| 3 Keyer Selection | 8 Wipe Transition Selection |
| 4 Keyer Source | 9 Program & Preview source rows |
| 5 PIP Effect | 10 Transition Effect |

2.1 Rear Panel Connections


POWER



1. POWER SWITCH

Switches the power On / Off.

DC IN 12V



2. DC Power Input

Connect the supplied 12V 5A PSU to this 4 PIN XLR socket.

MONITOR HDMI IN




3. Monitor HDMI IN (External Video Input)

The HS-1300 provides a useful connection for confidence monitoring of HDMI sources on location.

Connect one external HDMI input source for monitoring the live show.

Video Input Modules: The HS-1300 is equipped with six video input channels. Connect the respective video sources to these video input channels.

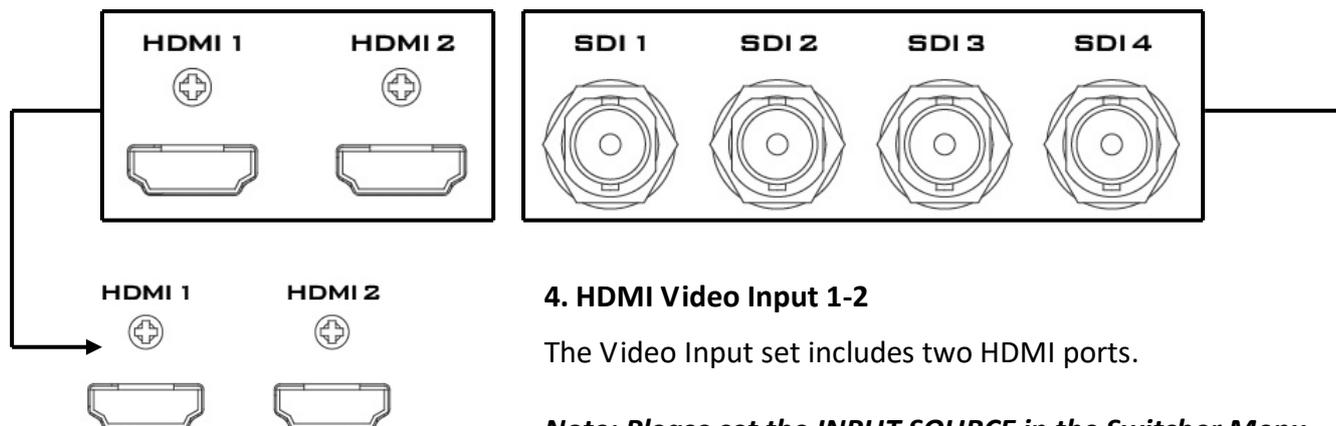

4. HDMI Video Input 1-2



The Video Input set includes two HDMI ports.

Note: Please set the INPUT SOURCE in the Switcher Menu.

5. SDI Video Input 1-4

The Video Input set includes four SDI connectors.

Note: Please set the INPUT SOURCE in the Switcher Menu.

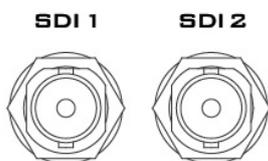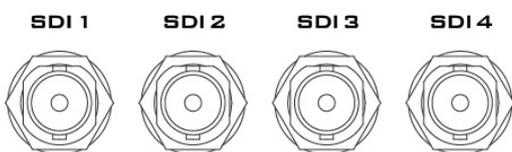

6. SDI Video Output 1-2


The BNC output connector is a user defined SDI output.

Note: Please set the OUTPUT SOURCE in the Switcher Menu.



7. HDMI Video Output

All three HDMI ports output Program video.

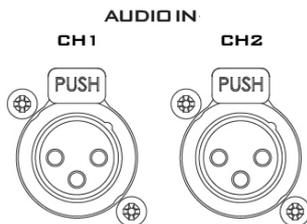

8. AUDIO Input 1-2

Supports two XLR Balanced Audio Input channels.


9. GPI Output



The GPI socket can be used for simple external control.

Note: Please configure GPI settings in the Switcher Menu.


10. Ethernet Port



10. Ethernet Port

The Ethernet port allows the user to transfer files to and from the switcher on the PC remotely. See [Chapter 3](#) for details on how you can utilize this port or perform system setup using this port.


11. Tally



11. Tally Signal Output

Sends **Red**, and **Green** tally signals to each channel. **Red** indicates On-Air, and **Green** indicates next camera source.


12. SWITCHER F/W UPGRADE



12. USB Firmware Upgrade Port

Connect the USB drive containing the latest firmware files to this port and start the process using the OSD MENU.

Note: See [Appendix 1](#) for firmware upgrade details.




13. Stream Port

The Stream Port allows the user to connect the laptop directly to the HS-1300 in order to access the NVS-31 configuration page or connect the built-in NVS-31 to any IP network.

Note: See [Chapter 5](#) for details.

2.2 Switcher Control Panel

User Memory and Function Keys

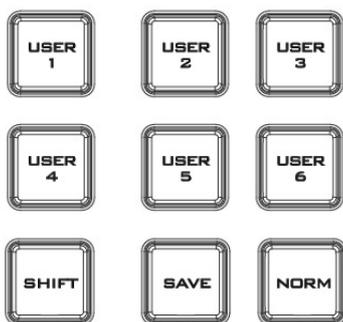

User Memory

User Memory buttons 1-6 allow the user to recall and load previously saved switcher settings.

SHIFT

There are 12 user memory locations. Under normal circumstances, Buttons USER 1 to 6 represent user memory locations 1 to 6. To load settings saved in locations 7 to 12 to buttons USER 1-6, simply press the **SHIFT** button.


SAVE: User Memory Save

The **SAVE** button saves the current switcher settings. To save, keep holding down this button and then select the User Memory number by pressing the corresponding User Memory button.

Normalise Button

The **NORM** button resets the currently opened menu item to the default values.

Menu Control

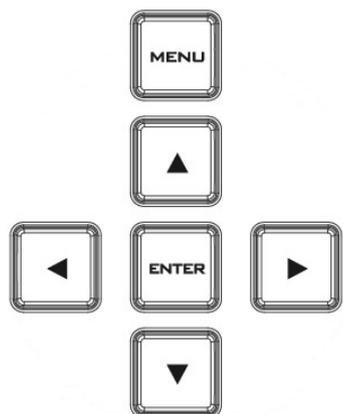

Menu Control

Press the **MENU** button in the HS-1300 function section to enter the System Configuration Menu. Press the **UP**, **DOWN**, **LEFT**, and **RIGHT** arrow buttons to browse the menu options and change values. Use the **ENTER** button to save and confirm any setting that has been changed. To Exit, simply press the **MENU** button again.

Keyer Selection



Key 1 PGM enables key 1 on the Multi view and PGM output

Key 2 PGM enables key 2 on the Multi view and PGM output

DSK 1 PGM enables DSK 1 on the Multi view and PGM output

DSK 2 PGM enables DSK 2 on the Multi view and PGM output


Key 1 PVW enables key 1 on the Multi view and PVW output

Key 2 PVW enables key 2 on the Multi view and PVW output

DSK 1 PVW enable DSK 1 on the Multi view and PVW output


DSK 2 PVW enable DSK 2 on the Multi view and PVW output

Keyer Source

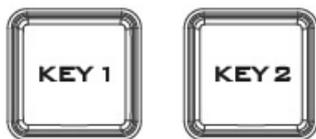

Selection of Keyer Source from Program / Preset Row

Keep holding down one of these buttons to enter key select mode and fill select mode. Select key source from the Program row and fill source from the Preset row.

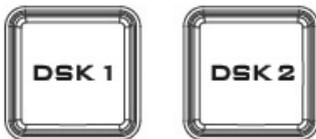

The selected source button will flash.




KEYER SETUP

Press this button to open Keyer configuration menu on the Multi view output, and the opened configuration menu corresponds to the selected keyer (Key 1/Key 2/DSK 1/DSK 2).

DSK AUTO

Auto DSK transition function either transitions “DSK 1 or DSK 2 individually” or transitions “DSK 1 and DSK 2 simultaneously”


PIP Effect

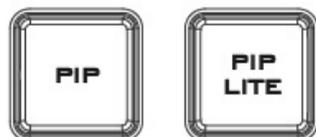

PIP enables the PIP key mode

PIP LITE enables the PIP LITE key mode


Background Transition & GRAB

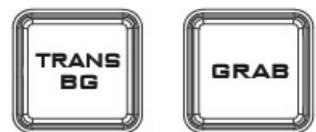

TRANS BG enables Background Transition between Program / Preset

GRAB grabs the current Program video image to Input 6.

Wipe Border Setting

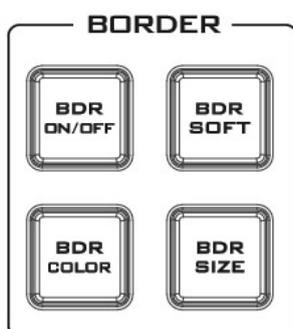


BDR ON/OFF turns the WIPE border function ON/OFF

BDR SOFT configures the WIPE border softness

BDR COLOR selects the WIPE border color

BDR SIZE adjusts the WIPE border thickness

Wipe Transition Selection

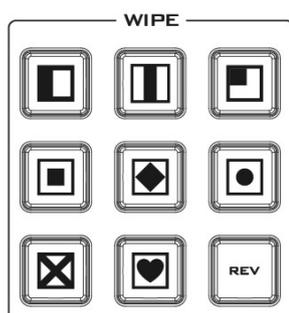


WIPE Transition Selection

The HS-1300 has 8 user defined wipe buttons that allow the user to select WIPE transition effect directly from the control panel.


The **REV** button reverses the direction of the selected WIPE.

All wipes can have an optional colour border applied. The wipe border width and colour are chosen within the menu system.

Transitions can be performed manually using the **T-Bar** or automatically by using the **SPEED** and **AUTO TAKE** buttons.

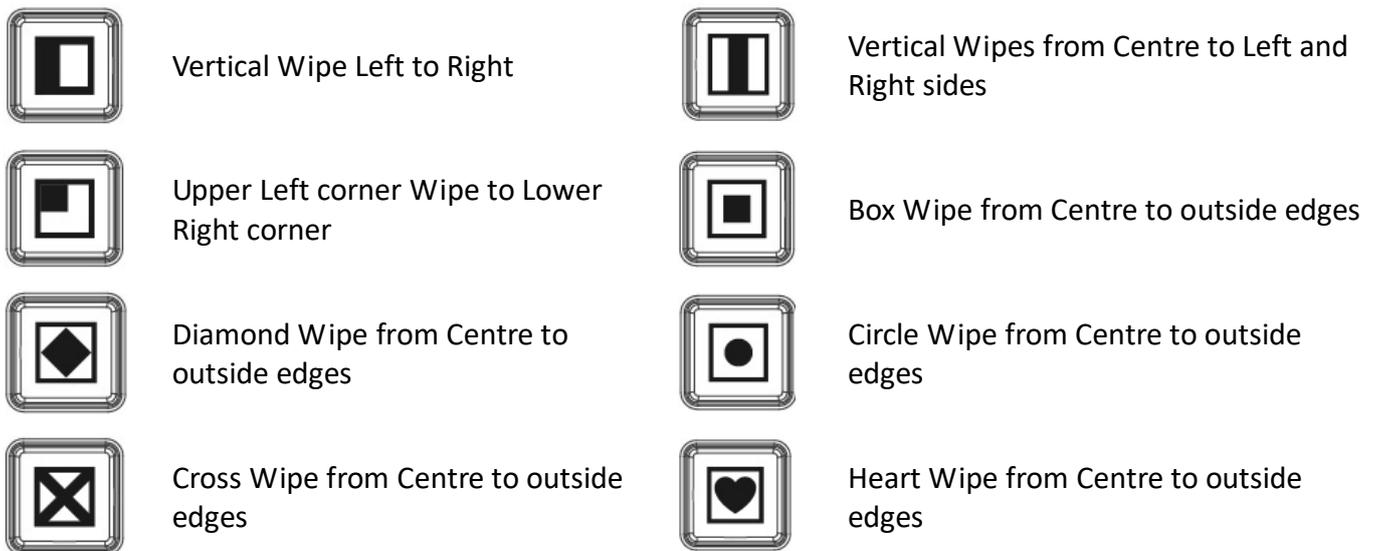


Program & Preview Source Row

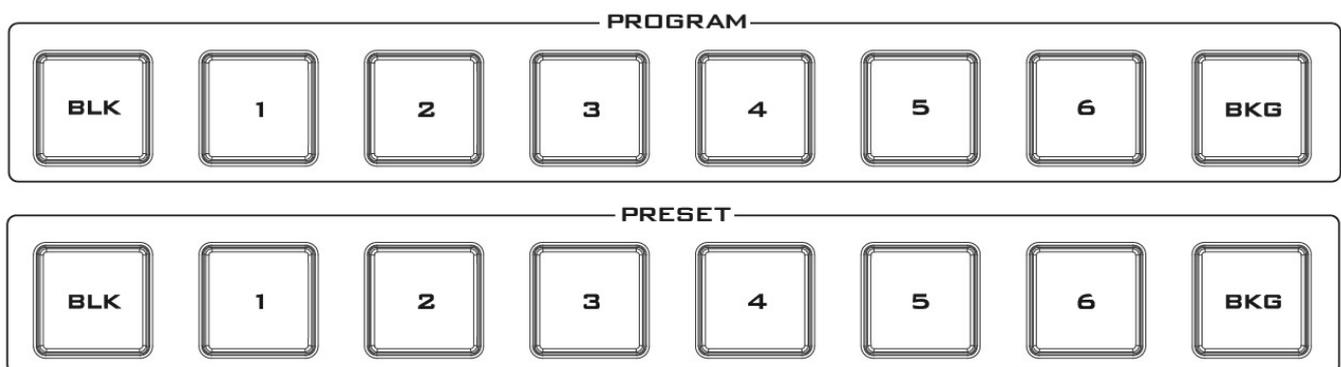

The Program row of buttons is the active channel or the live output. The active channel will appear as the Program Output. You can switch or CUT from one video source to another directly on the Program row. You will see the multi view Program output change as you press different keys along this top row of buttons.

The Preset row is the cued channel; this channel will appear in the Preview window. The Preset row selection decides which input will be transitioned next when using any of the transition controls.

Buttons 1, 2, 3, 4, 5 and 6 are video source buttons.

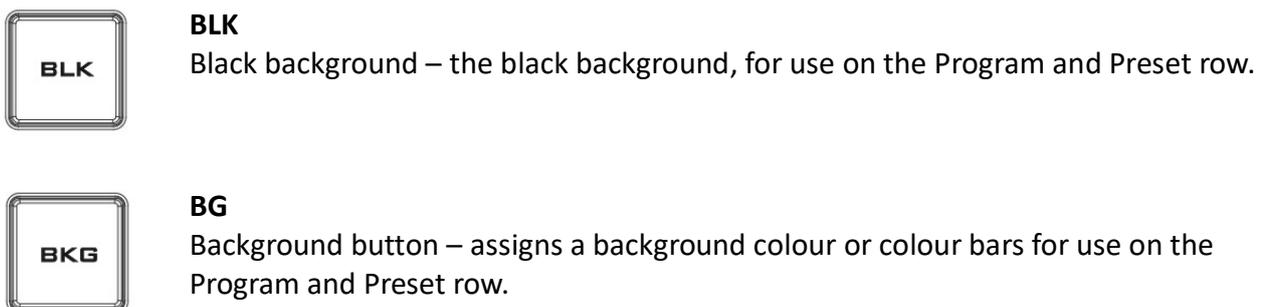


Transition Effect



FTB

Fade To Black, this button fades the current video program source to black. When pressed again it acts in reverse from complete black to the currently selected program video source.

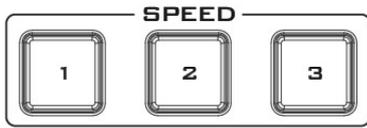

SPEED

There are three speed buttons which can be defined by the user. By pressing a speed button the user is choosing the rate of transition or time taken when using the AUTO TAKE button.

Transition Speed (1, 2 and 3):

Button 1= 12 frame duration, 2= 25 and 3= 50 at 1080i50

Button 1= 15 frame duration, 2= 30 and 3= 60 at 1080i60



PVW TRANS

Transition shown on PVW only.




MIX

This button enables MIX transition effect.



WIPE

This button enables WIPE transition effect. The WIPE button must be selected when a wipe effect transition between the selected Program and Preset sources is required. This WIPE effect is produced by moving the T-Bar manually or pressing the AUTO TRANS button.

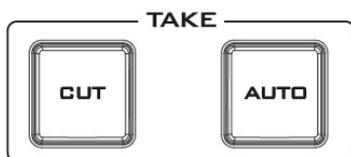


CUT

This performs a simple immediate switch from the current main source to the selected sub source. The selected transition wipe or MIX is not used.

AUTO TAKE

This performs an automated switch from the current program source to the selected Preview source. The selected transition wipe or MIX will also be used. The timing of the transition is set by the chosen Speed button.

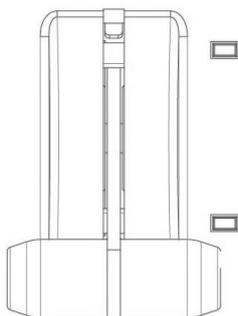

T-Bar

This performs a manually controlled transition from the current program source to the selected preset source. The selected transition wipe or dissolve will be used. When the T-Bar has travelled as far as it can go, the transition between sources is complete. The T-Bar has indicators next to it, which light when the transition is complete.


Audio Control

HEADPHONE

Headphone Socket

¼" / 6.3mm Stereo Headphone Socket for conventional headphones.

Note: Use headphone only when the PGM view is enabled on the 17.3" built-in monitor.



MUTE


This button mutes the headphone audio.



Headphone Volume Control


Controls Headphone or Headset volume level.

2.3 Monitor Control Panel

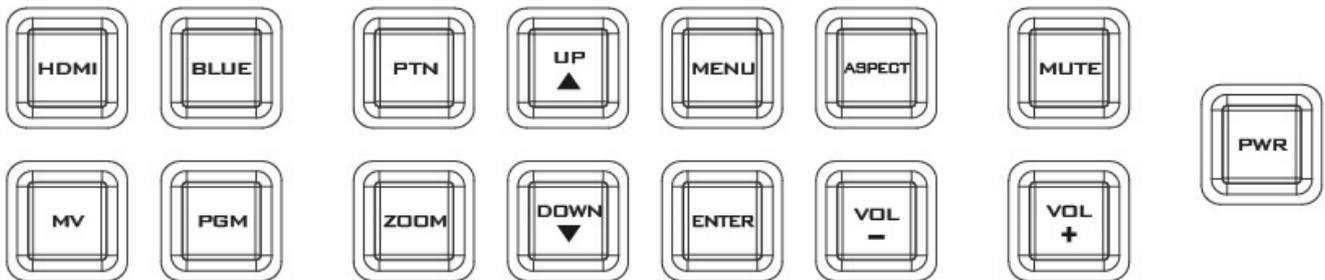

Power

Switches the HS-1300 Monitor Power ON / OFF

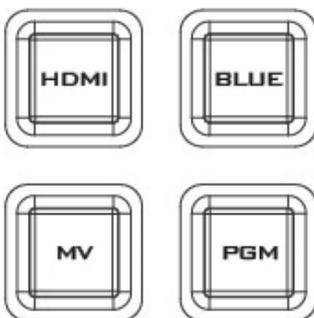

Source Select Buttons

Select the type of source you are using - HDMI, MV (multi-view), PGM (program).

HDMI

Switch the 17.3" built-in monitor to display the video source plugged into the **MONITOR HDMI IN** port.

BLUE

Press this button to eliminate the red and green component of input signals. Only the blue component of an input is displayed on the screen.

MV

Press this button to set the Monitor to **MULTIVIEW** mode.

PGM

Press this button to set the Monitor to **PROGRAM** view.

Note: Enabling the PROGRAM view on the monitor activates headphone audio output.



PTN


When pressed displays internally generated SMPTE 75% Colour Bars. Press again to return to the previously selected video input.



ZOOM



This feature is designed for use with HD-SDI and HDMI sources above 720p resolution. Press this button to zoom in to the video on the display. This is strictly a zooming function and does not alter the native aspect ratio of the source pixels to fill the screen.

The **ZOOM** button allows you to toggle the Pixel Zoom feature between **ZOOM x1, x2, x4** and **x8**.

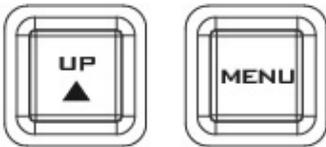

Menu Navigation Buttons

Display and navigate the set up menus - See [Monitor Menu Options](#) for more details.

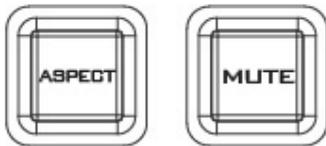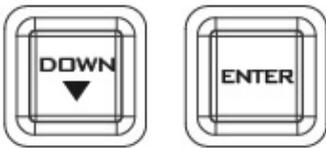


Aspect Ratio Button

Sets the Aspect Ratio to 16:9 / 4:3

Volume Control


Adjusts the speaker / headphone volume up / down.

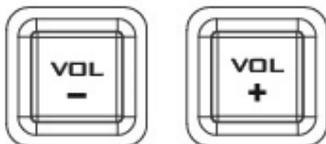

MUTE

Mutes the audio from the internal speakers or headphone socket.

2.4 Record/Stream Panel



SD CARD
SLOT



RECORD

Press the **RECORD** button to start enable video record mode. See [section 5.4](#) for details.



STREAM

Press the **STREAM** button to enable video stream mode. See [section 5.4](#) for details.



RECORD + STREAM

Press the **RECORD + STREAM** button to enable video record and stream modes at the same time. See [section 5.4](#) for details.

Note: Not all models come with the Record+Stream button.



BITRATE

Use the **BITRATE** button to switch between **high (H)**, **moderate (M)** and **low (L)** bitrates for each of the **RECORD**, **STREAM** and **RECORD+STREAM** buttons. See [section 5.4](#) for details.

Note: Not all models come with the bitrate button.



SD Card Slot

Insert an SD card into the SD card slot for video recording.

Note that you should only use Class 10 SD card or above. See the Appendix, Recommended SD Cards, for a list of SD cards recommended by Datavideo.

Note: Do not remove SD card while it is being written as doing so may result in corrupted video files.

Chapter 3 Network Setup



The Ethernet port on the back panel of the HS-1300 allows the user to import or export Stills/Clip files and User memory using the Switcher Image Import/Export software. The Switcher Image Import/Export software allows you to manipulate user memories, still pictures and clip files.

Section 3.1 discusses direct connection between the HS-1300 and your Windows computer. In Section 3.2, we will show you how you can remotely set up the Switcher Image Import/Export software with your switcher after it is installed on your Windows computer.


3.1 Switcher Setup with a Windows Computer

When new from the factory the HS-1300 will initially have a static IP address of 192.168.100.101. The unit can be directly connected to a Windows-based computer using an RJ-45 ethernet cable. The following set up should allow you to initially configure the unit before moving it to an existing DHCP / LAN network.

- An RJ-45 Ethernet cable.
- Windows 7/8/10 laptop or PC.
- The Datavideo Switcher Image Import/Export software.

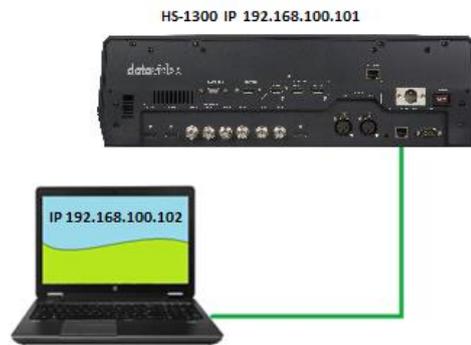

Instructions

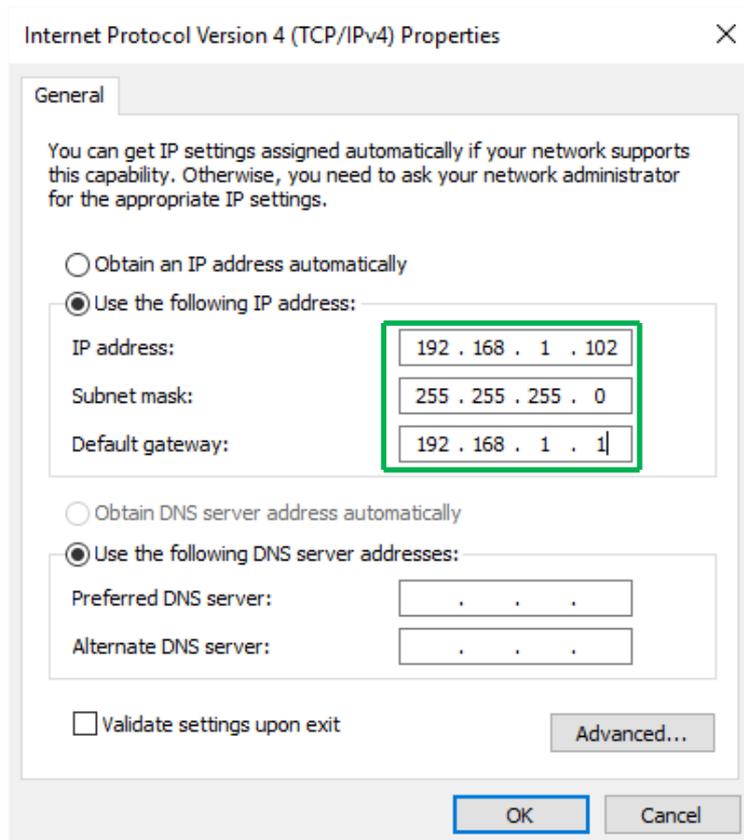

1. First connect the HS-1300 and the Windows computer together using an RJ-45 ethernet cable.
2. Turn on the Windows computer and set it to **static IP setup** within the **Windows Network and Sharing Centre**. In our example on the left the computer is given the following IP settings so that the computer matches the same IP range as the switcher.
3. Now install the **Switcher Image Import/Export software** to the computer.

3.2 Installing the Switcher Image Import/Export software to a Windows Computer

The HS-1300 can be connected to a simple IP network and accessed using Windows-based software. If you have not already set up the HS-1300 with a computer then please follow the instructions in the previous section.



SwitcherImageImEx_v0975.msi

Please download the latest software from the Datavideo HS-1300 web page. See: www.datavideo.com


The install executable file [.msi] will be called **SwitcherImageImEx_vXXXX.msi**

The vXXXX represents the latest version number.

Double click this .msi file then **follow the on screen install wizard prompts.**

Once installed launch the **Switcher Image Import/Export software.**


The **Switcher Image Import/Export software** has a built-in IP finder, which is designed for PC with multiple Ethernet cards or DHCP network environment. Please note IP finder can only find devices that are on the same network domain as the PC. If you cannot remember your device IP, please press the **RESET** button to restore the default network settings. Upon launch of the **Switcher Image Import/Export software**, you will be prompted to select one Ethernet Interface Card.

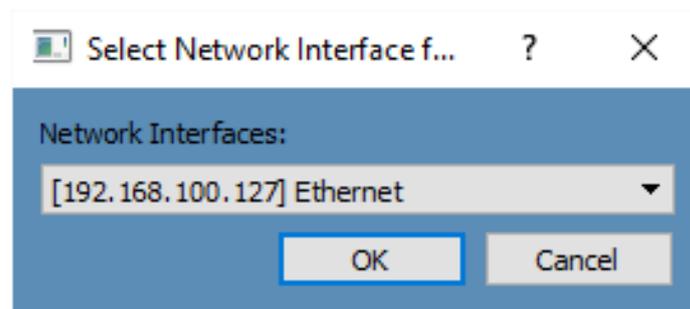

Once selected, click **OK** to start the scanning process.

Note: Please make sure the selected interface card is on the same network domain as the HS-1300 device.

Once the HS-1300 device is found, the software will connect with the switcher hardware over the IP set up described in the previous section. If the connection is successfully established, on the software user interface as shown in the diagram below, the **Connect Status** will show "**Connected**" (will display **Not Connected** if disconnected).


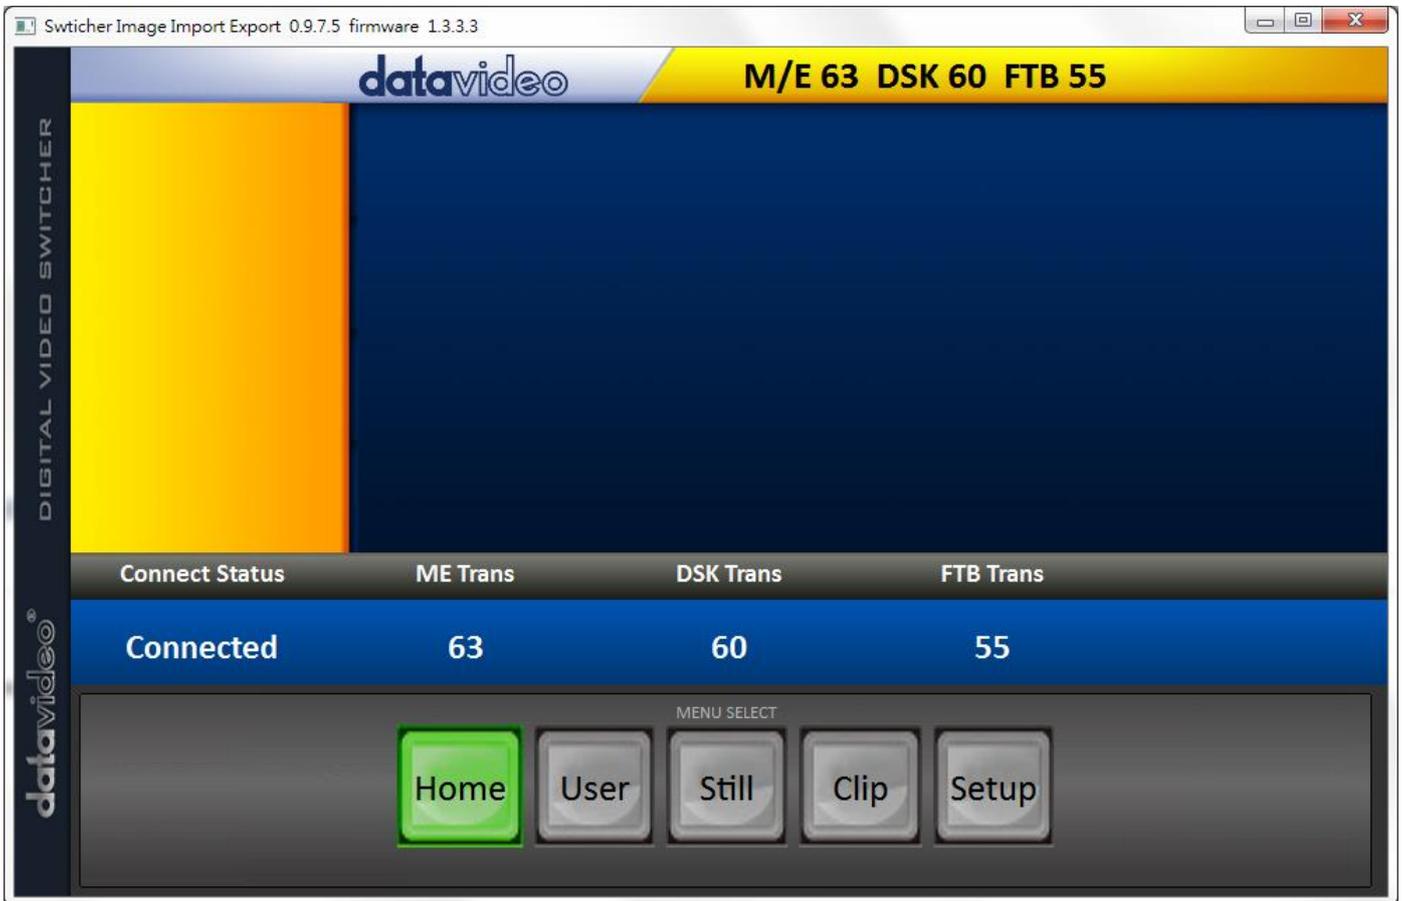


Router Based DHCP Setup

The computer software can also access the HS-1300 over an existing TCP/IP LAN type network. In order to initially set up the HS-1300, you may need the assistance of your local I.T. specialist to help with the network settings. To help guide you, we have included a simplified network setup example below, further advice may be available through your dealer locally or your Datavideo regional office.

To create this simple dedicated HS-1300 IP network you will need:

- An IP router which can assign/give IP addresses.
- Two RJ-45 patch leads.
- Windows 7/8/10 laptop or PC.
- The IP router Administrator login and password.
- The Datavideo Switcher Image Import/Export software.

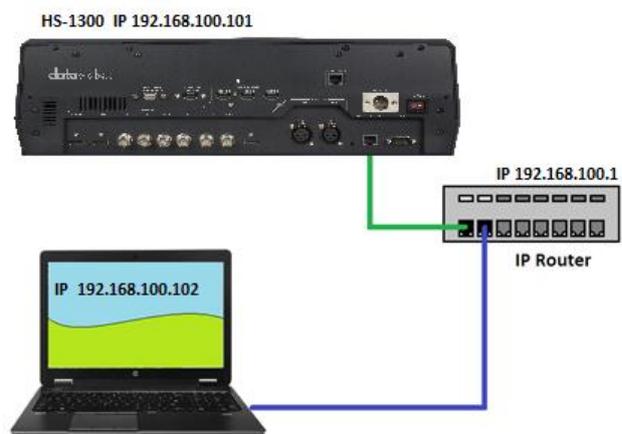

Instructions

1. First connect the router to the HS-1300 and the Windows computer using two RJ-45 patch leads.
2. Turn on the Windows computer and set it to **DHCP setup** within the **Windows Network and Sharing Centre**.
3. Now click the Windows start button and run the CMD prompt window.
4. At the command line > : _ type **IPCONFIG** and press enter.

5. The **DEFAULT GATEWAY** number displayed should be the router's current IP address.
6. Enter the **DEFAULT GATEWAY IP address** into the address bar of the computer's web browser.
7. The web browser should display the login window for the router. Enter the router's login and/or password.
The login details may be written on a sticker on the router itself or noted in the manual for the router.
8. Once logged into the router we need to change the router to supply IP addresses in the **192.168.100.xxx** range. Use the router's **LAN Setup** or **Configure LAN** option to set the router's IP address as **192.168.100.1** and click **save / apply**.
9. Now reboot the router and power ON the HS-1300.
10. Log into the router again using the web browser and the router's new IP address **192.168.100.1**
11. Use the router's **LAN Setup** or **Configure LAN** option again, within this option there should be another option called **Address Reservation** or **Client List**.
12. The two devices connected to the router should be listed here, the computer and the HS-1300.
13. The computer, because it is set for DHCP, will already have an IP address automatically assigned to it in this list.
14. The HS-1300 will also be listed with its default IP address of **192.168.100.101** if it is not changed.
15. Click **save / apply** then reboot the router again.
16. Close the web browser and CMD windows.
17. Now install the **Switcher Image Import/Export software** to the computer.

Setting the Target IP Address with the Switcher Image Import/Export Software

Click **Setup** button in the **MENU SELECT** pane and the current IP Network settings are shown alongside the software version.



If the network settings are wrong then you may not be able to access the HS-1300. Always keep a note of the last IP settings used and change these settings carefully to avoid problems.

Target IP address – This IP address is the location on the local network, or the internet, where the software can talk to the HS-1300. By clicking the **Target IP address** you can enter a new address, once entered click **Save Setup**. The next time the Image Import/Export Software is opened, it will try to contact the switcher on this new Target IP address.

Network – This option in the yellow menu column allows you to change the network options on the HS-1300. When delivered from the factory **the default static IP settings should be:**

Addr Mode: Static (a manually set IP address that does not change even after power cycling the HS-1300 unit)

Target IP address: 192.168.100.101


Network Mask: 255.255.255.0

Gateway: 192.168.100.1

DHCP Setup - If the IP set up method is changed to DHCP then each time the HS-1300 is started, it may be given a different IP address by the network. Only use this method if you know how to find the HS-1300 on the internal IP network. A device on the network (usually a router or server) will automatically assign an IP address to the HS-1300. The other settings such as IP address, Subnet Mask and Gateway may appear blank within the **Switcher Image Import/Export software** as these would be automatically set by network router/DHCP server.

Chapter 4 Switcher OSD MENU

4.1 Overview

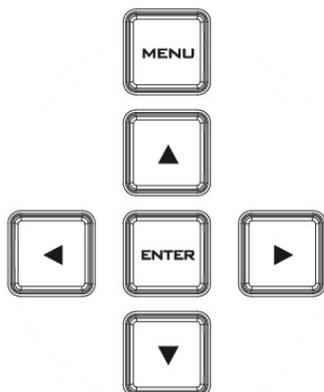

When the **MENU** button is pressed the Main Menu list is displayed on the HS-1300 monitor.

This section covers the Menu options in the order that they appear on the HS-1300 monitor. These settings may also appear in more detail elsewhere in this instruction manual. Options may vary depending on the firmware version in use.

Once the chosen setting has been confirmed with the **ENTER** button, it is stored within the switcher’s non-volatile memory.

Main Options	Sub-Options	Parameters	
Start	Transition (Duration)	M/E	Mix Effect
		DSK	Downstream Key Effect
		FTB	Fade-to-Black Effect
	Type	Clip	
		Wipe	
		Mix	
	Wipe Effects	Wipe	Wipe Effect Presets
		Soft	Border Softness
		Width	Border Width
	Border	Luma	Border Color Luma
		Sat	Border Color Saturation
		Hue	Border Color Hue
	Position	X	Horizontal Position
		Y	Vertical Position
Matte	Luma	Background Matte Luma	
	Sat	Background Matte Saturation	
	Hue	Background Matte Hue	
Keyer	Keyer	DSK 2	Keyer Selection
		DSK 1	
		Key 2	
		Key 1	
	Keyer Ctrl	Chroma	Type of Keyer
Luma			
Linear			
P-in-P Lite		P-in-P lite window enable	
P-in-P	P-in-P window enable		
Priority	Optional and only available when Key 1 and Key 2 are selected. Bot – Set to bottom layer Top – Set to top layer		
Lift	Parameter for dark/black areas of the overall foreground key image, ranging from -100% to		

			+100%.
		Gain	Parameter for light/white areas of the overall foreground key image, ranging from 0 to 16.0
		Opac	Parameter for transparency of the overall foreground key image, ranging from 0% to 100%.
	Key Source	Bars Matte Input 6 Input 5 Input 4 Input 3 Input 2 Input 1 Black	Key Source Selections
		Fill	Fill Source Selection from Bars /Matte /Input 6 /Input 5 /Input 4 /Input 3 /Input 2 /Input 1 /Black
	Mask	Left	Left sets the left edge of the keyer mask
		Right	Right sets the right edge of the keyer mask
		Top	Top sets the top edge of the keyer mask
		Bottom	Bottom sets the bottom edge of the keyer mask
	Chroma	Keyer	DSK 2 (N/A) DSK 1 (N/A) Key 2 Key 1
Key Source		Bars Matte Input 6 Input 5 Input 4 Input 3 Input 2 Input 1 Black	Key Source Selections
CK Setup		CK Auto	Calculation of the best Hue & Luma values for the current Keyer source
		Hue	Parameter for color of the chroma key, ranging from 0 to 355.
		Luma	Parameter for luma of the chroma key, ranging from 0 to 100%.
		K Range	Setting the range of colors that match the background color to be keyed, ranging from 0 to 360.
		K Fgnd	Adjusts the performance of the chroma key in dark or black areas, ranging from -100% to 100%.
		K Bgnd	Adjusts the performance of the chroma key in light or white areas, ranging from K Fgnd value (min = 0) to 100%.
		Hi-Light	Boosts the foreground key in high luminance area, ranging from 0 to 100%.
		Lo-Light	Boosts the foreground key in low luminance area, ranging from 0 to 100%.

	Mask	Bg-Supp	Bg-Supp turns ON/OFF background suppress	
		Left	Left sets the left edge of the keyer mask	
		Right	Right sets the right edge of the keyer mask	
		Top	Top sets the top edge of the keyer mask	
		Bottom	Bottom sets the bottom edge of the keyer mask	
P-in-P	P-in-P Src	Key 1 / Key 2	Select either Key 1 or Key 2 in the "Keyer" Option and enable P-in-P	
	Position	X	Horizontal PIP Position	
		Y	Vertical PIP Position	
		Size	PIP Size	
	Border	Luma	PIP Border Luma	
		Sat	PIP Border Color Saturation	
		Hue	PIP Border Color Hue	
		Width	PIP Border Width	
	Crop	Left	Left Edge of the Crop	
		Right	Right Edge of the Crop	
		Size	Size of the Crop	
		Top	Top Edge of the Crop	
		Bot	Bottom Edge of the Crop	
	P-in-P	Fine Normal	Fine tune of parameters X/Y/Size with step size 0.1 Adjustment of parameters X/Y/Size with step size 1	
	P-in-P Lite	P-in-P Keyer	Key 1 / Key 2	Select either Key 1 or Key 2 in the "Keyer" Option and enable P-in-P Lite
Position		X	Horizontal PIP Position	
Border		Luma	PIP Border Luma	
		Sat	PIP Border Color Saturation	
		Hue	PIP Border Color Hue	
		Width	PIP Border Width	
Crop		Left	Left Edge of the Crop	
		Right	Right Edge of the Crop	
		Size	Size of the Crop	
		Top	Top Edge of the Crop	
		Bot	Bottom Edge of the Crop	
P-in-P Lite		Fine Normal	Fine tune of parameter X with step size 0.1 Adjustment of parameter X with step size 1	
Inputs		Input 1	Black	Black Level
			White	White Level
			Chrom	Chroma Level
	Input 2	Black	Black Level	
		White	White Level	
		Chrom	Chroma Level	
	Input 3	Black	Black Level	
		White	White Level	
		Chrom	Chroma Level	
	Input 4	Black	Black Level	
		White	White Level	
		Chrom	Chroma Level	
	Freeze	1	Still Freeze Live	

		2	Still Freeze Live
		3	Still Freeze Live
		4	Still Freeze Live
		5	Still Freeze Live
		6	Still Freeze Live
	Crosspoint	1	Input 6 Input 5 Input 4 Input 3 Input 2 Input 1 OFF
		2	Input 6 Input 5 Input 4 Input 3 Input 2 Input 1 OFF
		3	Input 6 Input 5 Input 4 Input 3 Input 2 Input 1 OFF
		4	Input 6 Input 5 Input 4 Input 3 Input 2 Input 1 OFF
		5	Input 6 Input 5 Input 4 Input 3 Input 2 Input 1 OFF

		6	Input 6 Input 5 Input 4 Input 3 Input 2 Input 1 OFF
Outputs	Output	SDI1/ SDI2	Input 6 Input 5 Input 4 Input 3 Input 2 Input 1 CLN PVW (Clean PVW) CLN PGM (Clean PGM) PG + DSK PVW PGM MultiV (Multi view)
		HDMI (17.3" Built-in Monitor Resolution)	1080i 1080p
	Audio	Mode	ON/OFF
		Src	Input 6 Input 5 Input 4 Input 3 Input 2 Input 1 Follow External
		SDI 1	SDI 1 Audio Enable (ON)/Disable (OFF)
		SDI 2	SDI 2 Audio Enable (ON)/Disable (OFF)
		HDMI (17.3" Built-in Monitor)	HDMI Audio Enable (ON)/Disable (OFF)
		Tally Mode	Audio Mixer
	Normal		
	GPI Out	ON/OFF	GPI Enable/Disable
		Mode	Level/Pulse
		Width	Pulse width
		Input 1-6	GPI-out assignment
		Delay	0-99
	Multiviewer	AutoNum	Auto number input labels (ON/OFF)
Label Inf		Input label is followed by information which describes the input as still, live or frozen image (ON/OFF)	
Trns Lab		Turn the background of the label from a solid colour to transparent (ON/OFF)	
Stills	Load Still	Load	Pressing this button loads the selected still picture source
		Still Memory Location	0-500

		Destination	Input6 Input5 Input4 Input3 Input2 Input1	
		Thumbnail Picture - 1	Preview of the previous image	
		Thumbnail Picture	Preview of the image to be loaded	
		Thumbnail Picture + 1	Preview of the next image	
	Save Still	Save	Pressing this button saves the selected still picture	
		Source	Input6 Input5 Input4 Input3 Input2 Input1	
		Still Memory Location	0-500	
	Grab Still	Grab	Press this button to grab the current program view	
		Grab Destination	Input6 Input5 Input4 Input3 Input2 Input1	
	Freeze	1	Sets the Frame store mode of Input 1 to Clip / Still / Freeze / Live	
		2	Sets the Frame store mode of Input 2 to Clip / Still / Freeze / Live	
		3	Sets the Frame store mode of Input 3 to Clip / Still / Freeze / Live	
		4	Sets the Frame store mode of Input 4 to Clip / Still / Freeze / Live	
		5	Sets the Frame store mode of Input 5 to Clip / Still / Freeze / Live	
		6	Sets the Frame store mode of Input 6 to Clip / Still / Freeze / Live	
User Mems	Load Mem	Memory	Memory Selection from 1 to 999	
		Load	Selection of this button loads the selected memory	
	Save Mem	Memory	Memory Selection from 1 to 999	
		Save	Selection of this button saves to the selected memory	
	Load Clip	Load	Selection of this button loads the selected clip	
		Clip Memory Location	Memory locations from 0 to 999	
		Thumbnail Clip - 1	Preview of the previous clip	
		Thumbnail Clip	Preview of the clip to be loaded	
		Thumbnail Clip + 1	Preview of the next clip	
		Clear Clip	Clear the loaded clip	

		Delete Clip	Remove the clip from the memory location
Setup	Standard	1080i/50	Resolution Selections from 1080i/50/59.94/60 720p/60/59.94/50
		Save Setup	Saves the selected resolution
	Audio	Level	EBU SMPTE AUTO
	Menu Mode	Advanced	Full
		Basic	Reduced
	Menu Pref	Blue / Grey	Selection of menu color
		Transp	Menu transparency level of 0/1/2
		Size	Menu size of Normal/Small/Large
	Menu Pos	Bottom Right Left Top Centre	This option sets the menu position
	Auto Save	ON / OFF	Automatically saves the last settings before the machine is shut down; once turned ON auto save also occurs upon every Still Load.
	Factory Def	Reset	Factory Default Reset loads the default configuration from memory point 0 for all options except for the Setup.
		Reset Names	Resets the Multiviewer labels to the default settings
		Network Default	Resets the network settings
	Language	English Traditional Chinese Simplified Chinese	
Software	Upgrade	This starts the FW upgrade process See Appendix 1 for the process.	

4.2 Functions

The HS-1300 HD 6-Channel Portable Video Studio offers the user an OSD menu to perform several image effect configurations, such as Picture-in-Picture, keyers, downstream keys, still pictures and etc. The user can also configure the I/O by selecting the Inputs and Outputs options. In addition, under the setup options, the user is allowed to set the menu color, size, position and language.

The OSD Menu also gives the user the flexibility to switch between basic and advanced modes. The basic mode is generally a condensed version of the advanced menu mode. The following sections will show you the options available in these two modes.

Start

The “**Start**” option generally allows the user to set the Transition duration, the Transition type, and various WIPE effect parameters. The OSD menu display is illustrated in the table below.

Advanced Mode

Start	Transition	M/E	60	DSK	60	FTB	60
	Type	Wipe					
	Wipe Effects	Wipe	1	Soft	0%	Width	0%
	Border	Luma	100%	Sat	80%	Hue	178
	Position	X	0%	Y	0%		
	Matte	Luma	100%	Sat	80%	Hue	0
Ip Addr: 192.168.100.101							

Basic Mode

Start	Transition	M/E	60	DSK	60	FTB	60
	Wipe Effects	Wipe	1	Soft	0%	Width	0%

Transition

The transition option allows the user to set the transition duration, in frames, for switching to the PGM view when using the **AUTO**, **DSK** and **FTB** buttons. The sub-options are (AUTO) Mix Effect (**M/E**), Downstream Key (**DSK**) and Fade-To-Black (**FTB**). If the M/E is set to a value of 50 then the transition will take effect over a period of 50 frames or roughly 2 seconds. When the **AUTO button** is pressed, the transition will take the current M/E value.

Wipe Effects

This sub-option allows the user to select the desired Wipe Transition Effect and configure the wipe’s border softness and width.

- **Wipe** – Wipe Effect Selection.
- **Soft** – A low value results in a solid edge border and a high value gives a soft diffused border.
- **Width** – A low value results in a thin border and a high value gives a wide border.

Border

After selecting this sub-option, the user will then be allowed to fine-tune the border color by adjusting the Luma, Saturation and Hue values, i.e. Luma, Sat and Hue.

Position

Position allows the user to adjust the centre position of some wipes (e.g Circle & Ellipse). X represents the horizontal position and Y represents the vertical position.

X	Y
Positive value: position the wipe centre to the right	Positive value: move the wipe centre up
Negative value: position the wipe centre to the left	Negative value: move the wipe centre down
Zero value: Position the wipe centre at the screen centre	Zero value: Position the wipe centre at the screen centre

Matte

The user can configure the Matte Luma, Saturation and Hue under this sub-option.

IP Address

The displayed IP address allows the user to connect to the switcher from a remote location where network connection is available.

Keyer

In this option, the user is able to configure four keyers, which are **Key 1**, **Key 2**, **DSK 1** and **DSK 2**.

Advanced Mode = Basic Mode

Keyer	Keyer	Key 1		
	Keyer Ctrl	Chroma	P-in-P	Priority Bot
		Lift 0%	Gain 1.0	Opac 100%
	Key Source	Input 1	Fill Input 3	
	Mask	Left 0%	Right 0%	
		Top 0%	Bot 0%	

Keyer Control

There are three keying modes available: **Linear**, **Luma**, and **Chroma**.

After the keying mode is chosen, if only one source is enabled for the keyer, select the source in **Key Source**. If two sources are enabled for the keyer, select the respective sources in **Key** and **Fill Sources**. You may also select **P-in-P** or **P-in-P Lite** to apply the keying effect to the P-in-P window.

Please note:

If Luma is selected, fine tune the Luma Keyer parameters (Lift, Gain and Opac) in the Keyer option.

If Chroma is selected, fine tune the Chroma Keyer parameters in the Chroma option.

If P-in-P is selected, fine tune its parameters in the P-in-P option.

If P-in-P Lite is selected, fine tune its parameters in the P-in-P Lite option.

For example, if the user selects **Key 1** → **Chroma** → **P-in-P**, you will be performing chromakeying of the P-in-P image after the relevant chroma keyer parameters are adjusted in the **Chroma** option.

Priority sets the key image to either the top layer or bottom layer and is only available if **Key 1** or **Key 2** is selected.

The Keyer Control also allows the user to adjust lift, gain and opacity of the key image.

Lift adjusts the dark/black areas of the key image.

Gain adjusts the light/white areas of the key image.

Opacity adjusts the transparency of the overall foreground key image.

Key Source

This sub-option allows the user to assign the key source; various options are listed below:

Bars	Matte	Input6	Input5	Input4	Input3	Input2	Input1	Black
------	-------	--------	--------	--------	--------	--------	--------	-------

Fill Source

This sub-option allows the user to assign the fill source if **Split** is selected; various options are listed below:

Bars	Matte	Input6	Input5	Input4	Input3	Input2	Input1	Black
------	-------	--------	--------	--------	--------	--------	--------	-------

Mask

The Mask feature allows the user to configure the Mask in chroma, luma or linear mode.

- **Left** – Left sets the left edge of the keyer mask.
- **Right** – Right sets the right edge of the keyer mask.
- **Top** – Top sets the top edge of the keyer mask.
- **Bottom** – Bottom sets the bottom edge of the keyer mask.

Chroma

In this option, the user will be able to find all the parameters needed to perform chromakeying of the green backdrop.

Advanced Mode = Basic Mode

Chroma	Keyer	Key 1		
	Key Source	Input 5		
	CK Setup	CK Auto	Hue 120	Luma 100%
		KRange 170	K Fgnd 15%	K Bgnd 67%
		Hi-Light 0%	Lo-Light 0%	Bg-Supp On
	Mask	Left 0%	Right 0%	
		Top 0%	Bot 0%	

Keyer

First of all, select the **Keyer** that you would like to enable for the chromakeyer (**Key 1**, or **Key 2**) and then select one Key Source from all available **Key Sources** listed in the table below.

Bars	Matte	Input6	Input5	Input4	Input3	Input2	Input1	Black
------	-------	--------	--------	--------	--------	--------	--------	-------

CK Setup

In this sub-option, the user will be able to fine tune various chroma keyer parameters.

CK Auto: This function calculates the best Hue & Luma values for the current Key Source.

Hue: This parameter adjusts the color of the chroma key. A typical green screen value will be around 120. Blue screen value will be around 240.

Luma: This parameter adjusts the luma value of the chroma key

Key Range (KRange): Key Range sets the range of hues or colors (0 – 360 degrees) that closely match the background color to be keyed. The user can start with a value of 120 degrees and this value can be fine-tuned up or down depending on the setup of the green or blue backdrop studio.

Key Foreground (K Fgnd): Key Background adjusts the performance of the chroma key in light or white areas. Increase the value if the light areas are becoming too transparent.

Key Background (K Bgnd): Key Foreground adjusts the performance of the chroma key in dark or black areas. Increase the value if the dark areas are becoming too transparent.

Hi-Light: Hi-light boosts the foreground key in high luminance area.

Lo-Light: Lo-light boosts the foreground key in low luminance area.

Bg-Supp: Background Suppress removes the Luma (Brightness) of the background from the final image. Bg-Supp turns ON/OFF background suppression.

Mask

The Mask feature allows the user to configure the Mask in chroma mode.

- **Left** – Left sets the left edge of the Chroma keyer mask.
- **Right** – Right sets the right edge of the Chroma keyer mask.
- **Top** – Top sets the top edge of the Chroma keyer mask.
- **Bottom** – Bottom sets the bottom edge of the Chroma keyer mask.

P-in-P

P-in-P option allows the user to adjust all related P-in-P parameters. Enter this option if the user selects **P-in-P** in the **Keyer Ctrl** sub-option of the **Keyer** option. “**P-in-P Scr**” sub-option indicates the keyer enabled for P-in-P. In our example below, the **Key 1** keying effect will be applied to the P-in-P window.

Please note that the “**P-in-P Scr**” sub-option can only be changed in the **Keyer** option.

Advanced Mode = Basic Mode

P-in-P	P-in-P Src	Key 1					
	Position	X	20%	Y	10%	Size	50%
	Border	Luma	0%	Sat	0%	Hue	0
		Width	0%				
	Crop	Left	0%	Right	0%	Size	0%
		Top	0%	Bot	0%		
	P-in-P	Fine					

Position

The user can adjust the P-in-P window position by adjusting values of **X**, **Y** and **SIZE**, where X is the horizontal position, Y is the vertical position and Size is the P-in-P window size.

- X-Value**
- Positive value: position the P-in-P window to the right.
 - Negative value: position the P-in-P window to the left.
 - Zero value: Position the P-in-P window at the center.

Y-Value Positive value: move the P-in-P window up.
 Negative value: move the P-in-P window down.
 Zero value: Position the P-in-P window at the center.

Size Ranges from 0 to 100 with 1% being the smallest and 100 being the largest. So 50% would represent a P-in-P window which is half the size of the background image. 100% would see the PIP image totally cover the background image unless offset to one side.

Border

P-in-P window border color can be set by adjusting the **Luma**, **Saturation** and **Hue** values. **Luma** and **Saturation** have a range between 0-100% and **Hue** lies between 0-355.

Border Width

The “**Width**” sub-option adjusts the border width. A width of zero (0) will turn the P-in-P window border off.

Crop

The P-in-P window crop can be adjusted by modifying the following parameters:

- **Left** – Adjusts the position of the left edge of the P-in-P window.
- **Right** – Adjusts the position of the right edge of the P-in-P window.
- **Size** – Adjusts the P-in-P window crop size.
- **Top** – Adjusts the position of the top edge of the P-in-P window.
- **Bot** – Adjusts the position of the bottom edge of the P-in-P window.

P-in-P

In this sub-option, the user is allowed to switch between **FINE** and **NORMAL** modes. In FINE mode, the parameters X, Y and Size can be finely tuned with step size 0.1. In NORMAL mode, the parameters X, Y and Size are adjusted with step size 1.

P-in-P Lite

P-in-P Lite option allows the user to adjust related P-in-P parameters **EXCEPT** its vertical position and the **P-in-P** window size. Use this option menu if the user selects **P-in-P Lite** in the **Keyer** option. “**P-in-P Keyer**” sub-option indicates the keyer enabled for P-in-P Lite. In our example below, the **Key 1** keying effect will be applied to the P-in-P Lite window.

Please note that the “**P-in-P Keyer**” sub-option can only be changed in the **Keyer** option.

Advanced Mode = Basic Mode

P-in-P Lite	P-in-P Keyer	Key 1			
	Position	X	-22%		
	Border	Luma	100%	Sat	80%
		Width	2%		Hue 0
	Crop	Left	32%	Right	22%
		Top	2%	Bot	24%
					Size 0%
	P-in-P Lite	Fine			

Position

The user can adjust the horizontal position of the P-in-P window by adjusting the **X** value.

- Positive X value positions the P-in-P window to the right.
- Negative X value positions the P-in-P window to the left.
- Zero X value positions the P-in-P window at the center.

Border

P-in-P window border color can be set by adjusting the **Luma**, **Saturation** and **Hue** values. Luma and Saturation range from 0-100%, whereas Hue ranges from 0-355. The “**Width**” sub-option adjusts the border width. A width of zero (0) will turn the P-in-P window border off.

Crop

The P-in-P window crop can be adjusted by modifying the following parameters:

- **Left** – Adjusts the position of the left edge of the P-in-P window.
- **Right** – Adjusts the position of the right edge of the P-in-P window.
- **Size** – Adjusts the P-in-P window crop size.
- **Top** – Adjusts the position of the top edge of the P-in-P window.
- **Bot** – Adjusts the position of the bottom edge of the P-in-P window.

P-in-P Lite

In this sub-option, the user is allowed to switch between **FINE** and **NORMAL** modes. In FINE mode, the parameters X can be finely tuned with step size 0.1. In NORMAL mode, the parameters X is adjusted with step size 1.

Inputs

This feature allows the user to configure the color of the Inputs 1-4. In addition, the user can shuffle the contents of Inputs 1-6 without changing the hardware connections at the back of the machine. The user can also select the input source from Clip, Still, Freeze and Live.

Advanced Mode

Inputs	Input 1	Black	0%	White	100%	Chrom	1.0
	Input 2	Black	0%	White	100%	Chrom	1.0
	Input 3	Black	0%	White	100%	Chrom	1.0
	Input 4	Black	0%	White	100%	Chrom	1.0
	Freeze	1	Still	2	Live	3	Still
		4	Still	5	Still	6	Live
	Crosspoint	1	Input 1	2	Input 2	3	Input 3
		4	Input 4	5	Input 5	6	Input 6

Basic Mode

Inputs	Freeze	1	Still	2	Live	3	Still
		4	Still	5	Still	6	Live
	Crosspoint	1	Input 1	2	Input 2	3	Input 3
		4	Input 4	5	Input 5	6	Input 6

Input 1-4

By selecting the corresponding input (Inputs 1-4), the user will then be allowed to configure the colour of the inputs 1-4 by adjusting its Black Level, White Clip and Chroma Gain parameters.

Freeze

“Freeze” allows the user to load an image to **Inputs 1-6** from one of the four sources listed as follows:

- Still
- Freeze
- Live

Crosspoint

In this sub-option, the user can shuffle the contents of Inputs 1-6 without changing the hardware connections at the back of the machine, or even assign multiple inputs to the same source. For example, the user is allowed to assign the input 2 video source to input 1, after which the input 2 video will also be displayed on the input 1 window.

Outputs

This option allows the user to configure various output settings such as video output, audio output, and GPI Out.

Advanced Mode

Outputs	Output	Sdi 1	Pgm	Sdi 2	Input 2	HDMI	1080P
	Audio	Mode	On	Src	Follow		
		Sdi 1	On	Sdi 2	On	HDMI	On
	Tally Mode	Audio Mixer					
	GPI Out	Off		Mode	Pulse	Width	1
		Input 1		Delay	0		
	MultiViewer	AutoNum	Off	Label Inf	Off	Trns Lab	Off

Basic Mode

Outputs	Output	Sdi 1	Pgm	Sdi 2	Input 2	HDMI	1080P
	Audio	Mode	On	Src	Follow		
		Sdi 1	On	Sdi 2	On	HDMI	On

Outputs

In general, the two SDI output ports (**SDI 1 and SDI 2**) located on the rear panel as well as the 17.3” built-in monitor (**HDMI**) can be configured to output one of the following:

- Input 6
- Input 5
- Input 4
- Input 3
- Input 2
- Input 1
- CLN PVW (Clean PVW)
- CLN PGM (Clean PGM)
- PG + DSK
- PVW
- PGM
- MultiV (Multi view)

In addition to selecting your output source, you are also allowed to set two different resolutions for the **17.3” built-in monitor**. The two available resolutions are 1080i and 1080p.

Audio

The Audio sub-option for the SDI and HDMI outputs allows the user to individually turn ON/OFF the embedded audio component for the **17.3" built-in monitor (HDMI)** and at the **SDI1 and SDI2 output ports (Sdi1 / Sdi 2)**.

Mode (On/Off): The HS-1300 can only accept external audio using the analogue XLR inputs on the rear panel. Ideally a master audio mixer would be used alongside the HS-1300. A Datavideo AM-100 or AD-200 could be considered. By changing the Audio sub option from ON to OFF will mute the incoming XLR audio from the external master audio mixer.

Level (EBU/SMPTE/AUTO): There are two different audio standards available for selection. The user can either select the EBU or SMPTE standard. By selecting AUTO allows the device to automatically detect the audio standard.

Note: To listen to audio via the headphone, enable PGM view on the 17.3" built-in monitor (Press the PGM button on the monitor control panel).

Tally Mode

In this sub-option, the user will be allowed to switch to either the **Audio Mixer** or the regular tally light connection (**Normal**).

GPI Out

This allows the user to perform GPI configuration. After turning on the GPI, select the GPI **mode**, which is either level or pulse. The pulse width can also be configured in the sub-option **Width (1-9)**. GPI out can then be assigned to one of Inputs 1-6 and the **delay** can be set to between 0 and 99. This feature could be used to trigger playback from an external playback device such as Datavideo's NVP-20 or HRS-30 unit.

Multiviewer

AutoNum: The Multiview windows can be automatically numbered, and this sub-option turns ON/OFF automatic numbering.

Label Inf: This sub-option turns ON/OFF Label information. Input label is followed by information which describes the input as still, live or frozen image.

Trns Lab: This sub-option turns ON/OFF Label Transparency. Once enabled, the background of the label is then turned from a solid colour to transparent.

Stills

Still allows the user to load images from the memory, save images to the memory, and save the images captured.

Advanced Mode

Stills	Load Still	Load	Still Num	13	Input 5
		Thumbnail Picture - 1	Thumbnail Picture		Thumbnail Picture + 1
	Save Still	Save	Input 5	Still Num	13
	Grab Still	Grab	Input 3		
	Freeze	1 Still	2 Live	3 Still	
		4 Still	5 Still	6 Live	

Basic Mode

Stills	Load Still	Load	Still Num	13	Input 5
		Thumbnail	Thumbnail Picture		Thumbnail Picture

		Picture - 1		+ 1
	Save Still	Save	Input 5	Still Num 13

Load Still

Upon selecting “**Load Still**”, the user can then choose the memory location from which the still image is loaded. The following are the destinations to which the still image can be loaded:

- **Input 6**
- **Input 5**
- **Input 4**
- **Input 3**
- **Input 2**
- **Input 1**

Select “**Load**” to load the still image to the determined destination.

Image Preview is available below the “**Load Still**” row. “**Image Preview – 1**” allows the user to preview the previous image, “**Image Preview**” displays the image that will be loaded when “**Load**” is selected, and “**Image Preview + 1**” shows the next image.

Save Still

“**Save Still**” allows the user to save the still image to a specific memory location. The user should determine the source of the still image first. The available sources are listed below:

- **Input 6**
- **Input 5**
- **Input 4**
- **Input 3**
- **Input 2**
- **Input 1**

To complete the save, the user can simply select “**Save**” after determining the memory location.

Grab Still

In this sub-option, select “**Grab**” to capture the current program view and save it to Grab Destination (Input 1 to Input 6).

Freeze

“Freeze” allows the user to load an image to **Inputs 1-6** from one of the four sources listed as follows:

- **Clip**
- **Still**
- **Freeze**
- **Live**

User Mems

In this option, the user is allowed to **load** previously saved settings and **save** the currently configured settings.

Advanced Mode = Basic Mode

User Mems	Load Mem	Memory 1	Load	
	Save Mem	Memory 1	Save	
	Load Clip	Load	Clip 1	

		Thumbnail Clip – 1	Thumbnail Clip	Thumbnail Clip + 1
		Clear Clip	Delete Clip	

Load Memory

Use the up/down arrow to scroll to the desired memory location (1-999) and load the saved setting by selecting “Load”. The user can also press one of the USER memory shortcut buttons (1-6) on the control panel as a quick way of loading those previously saved User configurations.

Save Memory

Use the up/down arrow to scroll to the desired memory location and save the current setting by selecting “Save”

Load Clip

Before loading the clip, the user should first choose the clip location where the video clip is saved. The following are the buffer destinations to which the video clip can be loaded:

- **Input 6**
- **Input 5**
- **Input 4**
- **Input 3**
- **Input 2**
- **Input 1**

Select “Load” to load the selected video clip to the configured destination.

Clip Preview is available below the “Load Clip” row. “Thumbnail Clip – 1” allows the user to preview the previous clip, “Thumbnail Clip” displays the clip that will be loaded when “Load” is selected, and “Thumbnail Clip + 1” shows the next clip.

To clear the loaded clip from the buffer, simply select “Clear Clip.” To remove clip from a memory location, select “Delete Clip.”

Setup

In the “Setup” menu, the user can change the **resolution**, switch between full and simplified menu versions, adjust the **menu preferences**, enable/disable **Auto Save**, reset the machine to its **Factory Default** settings, choose the preferred OSD menu **language**, **upgrade firmware** and view the **current firmware versions** (Interface, Mainboard and Keyboard).

Setup	Standard	1080i/59.94	Save Setup	
	Audio	Level Auto		
	Menu Mode	Advanced		
	Menu Pref	Blue	Transp 1	Size Normal
	Menu Pos	Centre		
	Auto Save	On		
	Factory Def	Restore	Restr Names	Network Def
	Language	English		
	HS-1300	S/W: v1.4.0.1	F/W: 2017-08-14	KBD: v2.27

Audio Level (EBU/SMPTE/AUTO)

There are two different audio standards available for the user to select. The user can either select the **EBU** or **SMPTE** standard. By selecting **AUTO**, the device will be allowed to automatically detect the audio standard.

Menu Preference

In menu preference, the user is allowed to set the menu color, menu transparency level, menu size and the display position.

Menu color: the available colors are blue and grey

Options of **Menu Transparency** are listed below:

0: No Transparency

1: Background 50% Transparent (buttons not Transparent)

2: All Menu 50% Transparent

Menu Size

The menu size options are:

1. Normal

2. Small (1080i Mode)

3. Large (720p Mode)

Menu Position

Menu Position gives the user ability to select several positions for the Menu area on the Screen. The current options are Centre, Top, Left, Right and Bottom.

Standard

This option allows the user to choose the appropriate output resolution such as 1080i/50. Once done, simply select "**Save Setup**" to confirm the selected output resolution. The available resolutions are 1080i/50/59.94/60, 720p/60/59.94/50.

Menu Mode

The user is allowed to switch between full and simplified menu versions. Select "Advanced" for full menu display or "Basic" to display a simplified version of the OSD menu.

Auto Save

When enabled, your last settings will be automatically saved before the machine is shut down. At the next boot, the machine will automatically load the last saved settings. In addition, a Still Load will cause the auto save to occur.

Factory Default

Reset: This option resets the machine to the factory default settings by loading the default configuration from memory point 0 for all configuration options except for the **Setup**.

Reset Names

This resets the Multiviewer labels (Inputs 1-6) to their default settings.

Network Default

Network Default resets the device's network settings.

Language

The available languages for OSD menu are English, Traditional Chinese and Simplified Chinese.

Software

This option is only available when the USB storage device containing the latest firmware file is inserted. Select Upgrade to start the firmware upgrade process. See [Appendix 1](#) for more details.

At the bottom of the menu, you will be able to view the version number of the latest firmware installed.

Chapter 5 Video Streaming

The HS-1300 Portable Video Studio includes a built-in Video Streaming Server (NVS-31) allowing the user to stream and record your program at the same time. From any SDI/HDMI input sources, the Datavideo's video streaming server generates an H.264 encoded stream that is compliant with RTSP or RTMP(S) protocols. While encoding the video at bit rates appropriate for live streaming, the Datavideo NVS-31 concurrently records a high-quality MP4 file to an SD card.

Note: *The built-in video streaming server and recording device are referred to as NVS-31.*

5.1 Streaming Network Connection and Device Search



This section details how to connect the NVS-31 to a network with or without a DHCP server, and describes how to acquire the NVS-31's IP address.

Connecting to a DHCP Network (DHCP Mode)

Follow the following procedure to scan your DHCP network for connected NVS-31 devices.

Note: *The NVS-31 will be automatically assigned an IP address upon connection to the DHCP network.*

1. Connect the NVS-31's stream port to the network via an Ethernet cable.
2. Turn on the HS-1300's power and the NVS-31 will also be turned ON in the DHCP mode by default.
3. Connect the laptop to the same network that the NVS-31 is connected to and download the free IP Finder utility program.
4. Double click the IP Finder utility program icon to open the IP Finder interface.
5. Click the **SCAN** button to start searching for connected devices.

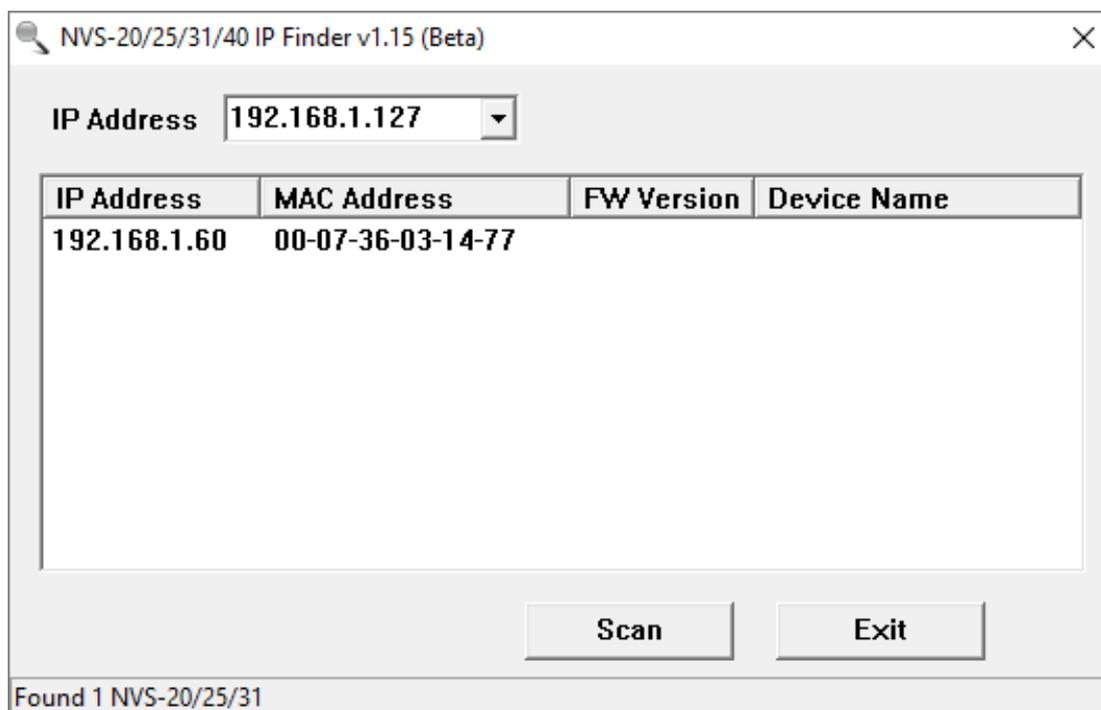


Connecting to a NON-DHCP Network (Static IP)

Upon connection to a non-DHCP network, the NVS-31 will not be assigned of any IP addresses. As such it is recommended that you manually assign a fixed IP address to the device or use the default IP address (192.168.1.60).

Default Fixed IP

Default Fixed IP is primarily used in point-to-point connection, such as connecting the PC to the NVS-31 directly. In a non-DHCP environment, the NVS-31 works in fixed IP mode only. To configure the NVS-31 to the **default IP**, please follow the steps outlined below:

1. Connect the NVS-31's stream port to the network via an Ethernet cable.
2. Turn on the HS-1300's power and the NVS-31 will also be turned ON in the DHCP mode by default.
3. Search for the NVS-31 device according to the method as detailed in the previous DHCP section. Once found, log into the user interface on the web browser.
4. Enter the system page by clicking the "System" tab on the home of the user interface.
5. In the "Network Setting", disable the DHCP mode.
6. You will then be allowed to manually enter the static IP address once the DHCP mode is disabled. The static IP is 192.168.1.60 by default. The subnet mask and default gateway are 255.255.255.0 and 192.168.1.254 respectively.



Tip: If you forget or lose the IP address, do the following to reset the network settings.

- Turn off the switcher.
- Press the **RECORD** and **STREAM** buttons at the same time then turn ON the power of the switcher
- Wait for about five seconds and release the button push as soon as you see the **RECORD** and **STREAM** button LEDs light up.
- The IP address should be the default IP which is **192.168.1.60**.

Troubleshooting the Network Connection

Connect the NVS-31 to the network and open the IP Finder utility program. Scan for the device. If not found, it is possible that your network is not assigning IP addresses. Reasons of this are outlined as follows:

- Router or DHCP server is not connected to the network.
- New devices are blocked by the network administrator.
- Anti-virus software or the firewall blocks the communication.

Solve the problem by trying the following:

- Turn off the router, wait for 10 seconds then turn on the router again.
- Reset the NVS-31 to the factory default:
 - Turn off the switcher.
 - Push the **Record and Stream** buttons simultaneously while turning on the switcher's power.
 - Wait for about five seconds and release the button push as soon as you see the **RECORD** and **STREAM** button LEDs light up.
- Reboot the PC.

If the problem still persists, try the following ways:

- Temporarily shut down the anti-virus software or firewall.
- Make sure no other devices are connected to the LAN (wired or wireless) because this may result in IP conflicts.


After trying all methods and if the problem is still not solved, the NVS-31 video streaming server offers the fixed IP feature that allows you to establish direct connection to the NVS-31. The default IP address is 192.168.1.60.

This method allows you to configure the NVS device to the IP range of your network so that you do not need a DHCP server to gain access to the NVS device.

- Connect your PC to the NVS device directly using an Ethernet cable (not necessarily a crossover cable).

Next, change the network settings of your PC or laptop.

- Click START located at the bottom left corner of your screen.
- On the text bar, enter Network Connections then click the icon that appears.
- Double click the network adapter that connects your PC or laptop to the network.
- Click the “**Properties**” button.
- Select “**Internet Protocol Version 4 (TCP/IPv4)**” option and click the “**Properties**” button.
- Check the “**Obtain an IP address automatically**” option.
- Enter IPv4 settings:
 - IP Address: 192.168.1.2
 - Subnet Mask: 255.255.255.0 (System default is 255.255.255.0)
 - Default Gateway: Not required for one-to-one connection.

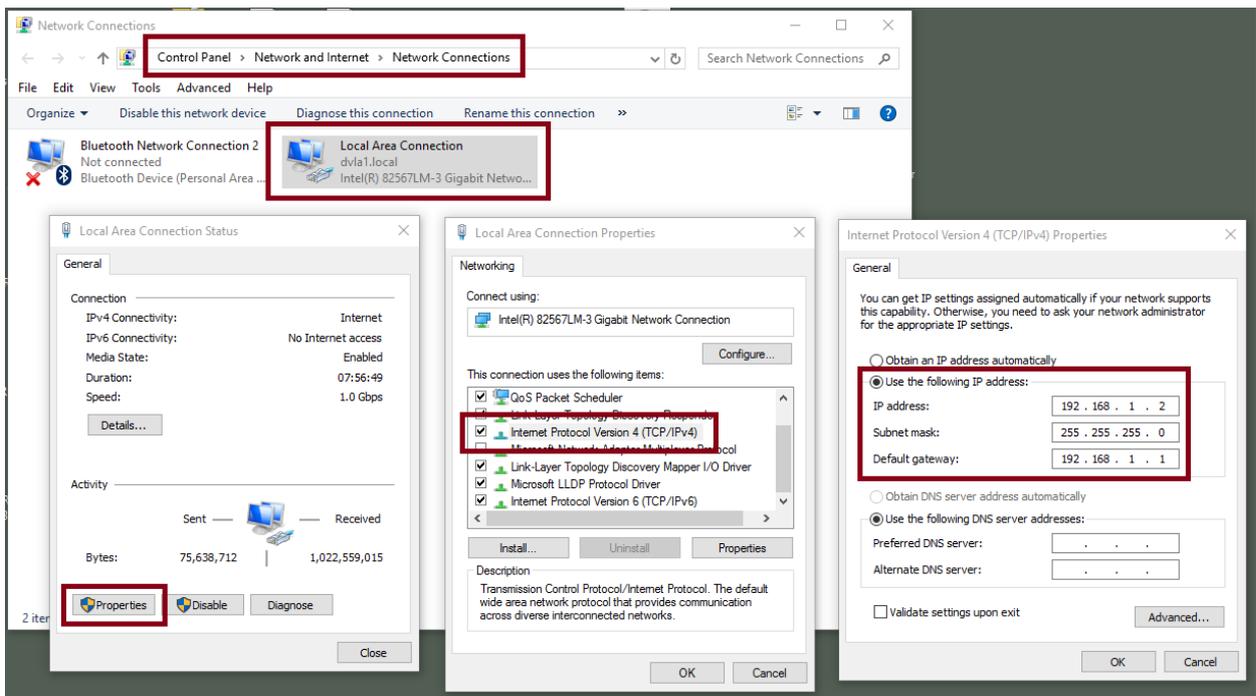

Note: Please write down the IPv4 address previously entered as it may be needed after you are done with streaming or recording.

- The NVS-31 should now be connected with an IP address of 192.168.1.60.
If the NVS-31 still cannot connect, simply restore the NVS-31 to the factory defaults.
 - Turn off the switcher.
 - Push the **Record and Stream** buttons simultaneously while turning on the switcher's power.
 - Wait for about five seconds and release the button push as soon as you see the **RECORD** and **STREAM** button LEDs light up.
 - Make sure no other devices are connected to the LAN (wired or wireless) because this may result in IP conflicts.
- Login the NVS-31 via a web browser.
 - Default user name is **admin**
 - Default password is **000000**
- Click the "**System**" tab then on the system page, enter network settings such as static IP and default gateway. Make sure that the default gateway matches your connected network and no device shares the same IP as the NVS-31.

For example, if your router's default gateway IP is 10.10.1.1, then in the default gateway field, you should also enter 10.10.1.1. Then set the IP address of the NVS-31 to 10.10.1.X, which can range from 10.10.1.2 to 10.10.1.255. Pick an unused IP address.

Network Setting

<p>DHCP</p> <p>Enable(DNS AUTO) ▼</p>	<p>Static IP</p> <p>192.168.1.60</p>
<p>Subnet Mask</p> <p>255.255.255.0</p>	<p>Default Gateway</p> <p>192.168.1.254</p>
<p>Primary DNS</p> <p></p>	<p>Secondary DNS(Alternative)</p> <p></p>
<p>MAC ADDRESS</p> <p>00:07:36:03:C0:20</p>	

- DHCP: Disable
- Static IP: X.X.X.Y; the first three decimal numbers must be the same as your router or switch. The number Y must be a number not used by any devices connected to the network.
- Subnet Mask: 255.255.255.0
- Default Gateway: Z.Z.Z.Z; same as the gateway IP of your router or switch.
Note: Some router may require special gateway IP setting; instead of the standard 192.168.1.1. Therefore, you should check the network properties on the PC before switching to the fixed IP mode.
For example, some routers have a gateway IP of 192.168.1.254 and as a result, the default gateway and primary DNS fields on the NVS-31 must also be configured to 192.168.1.254.
- Primary DNS: Same as the default gateway IP, which, if causing issues, can be changed to 8.8.8.8 or 8.8.8.4 (Public DNS provided by Google).

- Click the “**Submit**” button to save the network settings.
- Reconnect the PC and the NVS-31 to the network.
- Restore the PC’s original network settings.
- Shut down the HS-1300; wait for approximately five seconds before turning the HS-1300 back ON.
- You should be able to access the NVS-31 through the fixed IP address.


Advanced Troubleshooting

If you still are unable to connect, please try the following:

- Use the ARP table to search for the encoder’s MAC address; the device’s MAC address is on the print label at the bottom of your HS switcher.
- MAC address starts with **00:07:36:03:xx:xx**.
 - Switcher’s MAC address starts with 00:07:36:07:xx:xx (HS-1300 and HS-1300 only)
- On the command prompt (terminal on MAC OS), enter "**arp -a**" then press enter key to display an ARP list. See if the NVS-31 is successfully connected to the network.
- Execute **services.msc**, and on the right column of the “**Services**” window, locate “**DHCP Client**” then click “**Restart**”.
- On the command prompt, enter **ipconfig/flushdns** followed by **ipconfig/release** and **ipconfig/renew**.

5.2 Web User Interface

By now, we have obtained the IP addresses of the PC and the NVS-31. Enter the NVS-31’s IP address into the address bar of a browser then hit the **ENTER** button. Login by entering the user name as well as the password into a pop-up dialogue box as shown below.

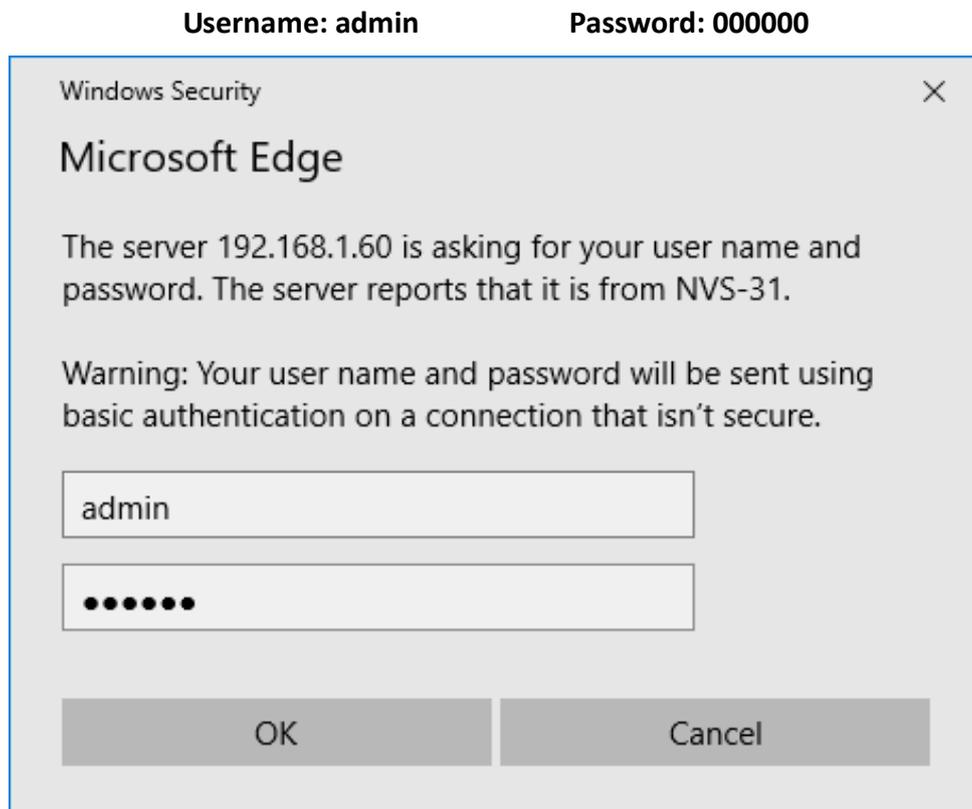

Click **OK** to login. Once logged in, the first page that appears will be the **Status** page.

Status

You will see the **Status** page immediately after logging into the NVS-31 web UI. On the Status page, you will be able to view the **Operation Mode**, **Video Resolution**, **Stream Settings** (RTSP/RTMP(S)/HLS/SRT/TS), **Record Settings**, **Record Media** and **Messages**.

The screenshot shows the 'Status' page of the NVS-31 web UI. The page is titled '1 CHANNEL STREAMING ENCODER / RECORDER NVS-31' and has a language dropdown set to 'English'. The main content area displays the following status information:

- Operation Mode : Stream Only
- Video Resolution : 1920x1080i, 59.94fps
- Stream Settings : Same as Input, 30fps, 3000kb/s, audio 128kb/s
- RTSP : rtsp://192.168.1.60:554/live or rtsp://192.168.1.60:8000/live
- RTMP : TS : udp://@239.100.100.100:12345
- Record Settings : Record Media : No SD Card Detected
- Messages :

Note: The NVS-31 web UI does not update automatically so to learn the latest device status, please refresh the page manually.

While monitoring streaming and recording, please update the page periodically regardless of how you operate the device (using the device's physical buttons only or using the device's physical buttons along with the web UI). This ensures the page is always displaying the most up-to-date information.

If an error occurs, the error code will be shown in the **"Messages"** field. The device's error codes are listed in the table below.

Error Messages	Descriptions	Error Code
STR_UP_ETH_LINK_DOWN	Ethernet Link Down	133
STR_UP_ETH_LINK_RESTORE	Ethernet Link Up from Down	134
STR_UP_ETH_CONN_ERR	RTMP Cannot Publish (Retrying)	140
STR_UP_ENC_START_ERR	Encoder Start Failed	129
STR_UP_ENC_BUFF_ERR	Encoder Buffer Error	130
STR_RUN_ETH_LINK_DOWN	Ethernet Link Down (Dropped)	133
STR_RUN_ETH_CONN_ERR	RTMP Drop Connection (Retrying)	140
STR_RUN_ENC_BUFF_ERR	Encoder Buffer Error	130
STR_RUN_PROG_BUFF_ERR	Streamer Buffer Error	137
STR_RUN_PROG_SOCKET_ERR	Streamer Socket Error	140
STR_STOP_PROG_EXIT_ERR	Streamer Stop Failed	141
REC_UP_DISK_ERR	Disk Bad Sectors/Read Only/File System Error	148
REC_UP_DISK_EMPTY	No Disk	144
REC_UP_ENC_START_ERR	Encoder Start Failed	129
REC_UP_ENC_BUFF_ERR	Encoder Buffer Error	130
REC_UP_PROG_START_ERR	Recorder Start Failed	148
REC_UP_PROG_BUFF_ERR	Recorder Buffer Error	154
REC_RUN_DISK_FULL	Disk Full	151
REC_RUN_ENC_BUFF_ERR	Encoder Buffer Error	130

REC_RUN_PROG_WRITE_ERR	Recorder Write Failed	153
REC_RUN_PROG_BUFF_ERR	Recorder Buffer Error	137
REC_STOP_DISK_EXIT_ERR	Unmount Disk Failed	156
REC_STOP_PROG_EXIT_ERR	Recorder Stop Failed	157

Operation Mode

Click the **Operation Mode** tab on the tool bar to open the operation mode configuration page.

The screenshot displays the 'Operation Mode' configuration page for the NVS-31. At the top, there are navigation tabs: Status, Operation Mode (selected), Storage, CG, System, and File Repair. The page title is '1 CHANNEL STREAMING ENCODER / RECORDER NVS-31' and the language is set to 'English'. The firmware version is 'FW20190618NVS_V06'. The main content area is divided into three sections: 'Record and Stream' (selected), 'Record Only', and 'Stream Only'. Each section has a radio button. Below the mode selection, there are two columns of settings. The left column is for 'Record Setting' and the right column is for 'Stream Setting'. The 'Record Setting' includes: Bitrate Mode (Mid), Resolution (Same as Input), Framerate (30.00), Profile (High), Video Bitrate (6 M), Audio Bitrate (128 K), GOP (60), File Name (RECORD), File Size (4G), and Recording File (None). The 'Stream Setting' includes: Auto Stream (OFF), Resolution (Same as Input), Framerate (30.00), Profile (High), Video Bitrate (1.5 M), Audio Bitrate (128 K), GOP (60), Stream Type (HLS), and Video Only (OFF). At the bottom, there are three buttons: Start, Stop, and Apply.

The NVS-31 offers the following operation modes:

- **Record and Stream:** Streaming and recording functions are enabled at the same time.
- **Stream Only:** Only streaming mode is enabled.
- **Record Only:** Only recording mode is enabled.

In each mode, the user will be allowed to customize various stream and record settings.

In the Stream Only mode, settings such as **Resolution**, **Frame Rate**, **Profile**, **Video Bitrate (bps)**, **Audio Bitrate (bps)**, **GOP** and **Stream Type** can be configured.

Record and Stream Record Only **Stream Only**



Bitrate Mode

Mid

Auto Stream

OFF

Stream Setting

Resolution

Same as Input

Framerate

30.00

Profile

High

Video Bitrate (bps)

3 M

Audio Bitrate (bps)

128 K

GOP

60

Stream Type

HLS

Video Only

OFF

Start

Stop

Apply

Five stream types are available on the NVS-31 and they are **RTSP, RTMP(S), HLS, SRT** and **TS**. See [Section 5.3](#) for details.

Click the **“Apply”** button to apply the new stream settings. Click the **“Start”** button to open the stream and the **“Stop”** button to end the stream.



As for recording, the settings are **Resolution, Frame Rate, Profile, Video Bitrate (bps), Audio Bitrate (bps), GOP, File Name** and **File Size**.

Record and Stream Record Only Stream Only



Bitrate Mode

Mid

Record Setting

Resolution

Same as Input

Framerate

Same as Input

Profile

High

Video Bitrate (bps)

12 M

Audio Bitrate (bps)

128 K

GOP

60

File Name

RECORD

File Size

4G

Recording File

None

Start

Stop

Apply

Click the **“Apply”** button to apply the new record settings. Click the **“Start Record”** button to start recording and the **“Stop Record”** button to stop recording.

Start

Stop

Apply

Stream and Record Settings

In the section, you will be introduced various setting options of stream and record functions.

Stream Encoder Settings

<p>Bitrate Mode</p> <p>Mid ▼</p> <p>High</p> <p>Mid</p> <p>Low</p>	<p>Bitrate Mode</p> <p>The bitrate mode sets the video bitrate mode for your video stream. The available modes are high, mid and low.</p> <p>Note: You are allowed to switch between different bitrate modes by pressing the Bitrate button on the Record/Stream panel. See section 5.4 for details.</p>
<p>Auto Stream</p> <p>OFF ▼</p> <p>OFF</p> <p>ON</p>	<p>Auto Stream</p> <p>If the Auto Stream is enabled, in the event of power outage, the stream will be automatically restored after the switcher is powered ON again.</p>
<p>Resolution</p> <p>Same as Input ▼</p> <p>Same as Input</p> <p>1920 × 1080</p> <p>1280 × 720</p> <p>960 × 540</p> <p>720 × 576</p> <p>720 × 480</p> <p>640 × 480</p> <p>320 × 240</p> <p>160 × 128</p>	<p>Resolution</p> <p>The first step of encoder setup is to adjust the image size. It is best to either match your original video source or scale it down. For example, capture at HD 720 and stream at HD 720. Or capture at HD 720 and stream at 540 (high).</p> <p>You should never be scaling up and streaming at a higher resolution than your original video source. For example, it does not make sense to capture at 720 and stream at 1080. Note that you will also have no gain in quality and you are using more bandwidth than is necessary for your viewers.</p> <p>You should also be aware that higher resolutions require greater processing power to encode the stream. Attempting too high of a resolution on too little processing power can result in degraded image quality and corrupted or interrupted streams or recordings.</p>
<p>Framerate</p> <p>30.00 ▼</p> <p>Same as Input</p> <p>60.00</p> <p>50.00</p> <p>30.00</p> <p>25.00</p> <p>20.00</p> <p>15.00</p> <p>10.00</p> <p>5.00</p> <p>1.00</p>	<p>Frame Rate</p> <p>Select a frame rate from the drop-down menu for video streaming. Note that frame rates should always match the frame rate of the video source.</p>

<p>Profile</p> <ul style="list-style-type: none"> Main ▾ High Main Baseline 	<p>Profile</p> <p>Profile sets the H.264 encoding profile for your stream. The available options are Baseline, Main, and High. Typically, High profile provides the best image quality and is suitable in most instances. However, depending on the decoder used when viewing the stream, such as with mobile devices, a Main or Baseline profile may be required.</p>
<p>Video Bitrate (bps)</p> <ul style="list-style-type: none"> 12 M ▾ 15 M 12 M 10 M 8 M 7 M 6 M 5 M 4 M 3 M 2.5 M 2 M 1.5 M 1 M 512 K 256 K 	<p>Video Bitrate (bps)</p> <p>The bitrate of the video specifies the amount of information stored in the video. The higher the bitrate is, the clearer the video is. However, when choosing your encoding settings for streaming, you should first check your available upload bandwidth. A good rule of thumb is for the bitrate of your stream to use no more than 50% of your available upload bandwidth capacity on a DEDICATED line. For example, if the result you get from a speed test shows that you have 2Mbps of upload speed available, your combined audio and video bitrate should not exceed 1Mbps.</p> <p>Usually high bitrate means good image quality; however, there are also exceptions. For example, SD video may appear acceptable at 1000 Kbps (1M) but HD video is unacceptable at 1000 Kbps. Therefore we recommend the following settings for your video bitrate:</p> <ul style="list-style-type: none"> • When NVS-31 is in record-only mode, the recommended video bitrate is 16 Mbps. • When NVS-31 is in stream-only mode, the recommended video bitrate is 10 Mbps. • When NVS-31 streams and records simultaneously, sum of the stream and record video bitrates should not exceed 12Mbps.
<p>Audio Bitrate (bps)</p> <ul style="list-style-type: none"> 128 K ▾ 384 K 256 K 128 K 64 K 32 K 	<p>Audio Bitrate (bps)</p> <p>The NVS-31 offers the user the following audio bitrates at which you may want to stream the audio. It is recommended to select 128Kbps or higher.</p>

<p>GOP</p> <p>60 ▼</p> <p>180</p> <p>160</p> <p>140</p> <p>120</p> <p>100</p> <p>60</p> <p>50</p> <p>30</p> <p>25</p> <p>20</p> <p>15</p> <p>10</p> <p>5</p> <p>3</p> <p>2</p> <p>1</p>	<p>GOP</p> <p>GOP pattern with longer GOP length encodes video very efficiently. Shorter GOP lengths usually work better with video that has quick movements, but they do not compress the data rate as much. Depending on your applications, the NVS-31 offers the user 16 GOP sizes ranging from 1 to 180.</p>
---	---

Stream Settings

<p>Stream Type</p> <p>RTSP ▼</p> <p>RTSP</p> <p>RTMP</p> <p>TS</p> <p>HLS</p> <p>SRT</p>	<p>Stream Type</p> <p>The NVS-31 offers the user five stream types which are RTSP, RTMP(S), TS, HLS, and SRT.</p> <p>Please note that when streaming, the NVS-31 converts video into data, which are sent across an IP network. High bitrates consume more bandwidth across the IP network. In a gigabit office LAN, high bitrate may not be a concern and Speed/Bandwidth is therefore not a limitation in an NVS-31 application environment.</p> <p>If your available bandwidth is limited, you should reduce both the resolution and the bitrate accordingly. A good rule of thumb is for the bitrate of your stream to use no more than 50% of your available upload bandwidth capacity on a dedicated line. For example, if the result you get from a speed test shows that you have 2Mbps of upload speed available, your combined audio and video bitrate should not exceed 1Mbps.</p>
--	--

Stream Type – RTSP

<p>RTSP Port</p> <p>554</p>	<p>RTSP Port</p> <p>RTSP Port is 554 by default.</p>
<p>RTSP HTTP Port</p> <p>8000</p>	<p>RTSP HTTP Port</p> <p>RTSP HTTP port is 8000 by default.</p>

<div style="border: 1px solid gray; padding: 5px;"> <p>Video Only</p> <p>OFF ▼</p> <p style="background-color: #007bff; color: white; padding: 2px;">OFF</p> <p>ON</p> </div>	<p>Video Only</p> <p>Enable this option if you just want to stream the video without the audio.</p>
--	--

RTSP Username/Password
The account and password are **root** by default.

RTSP Account	RTSP Password
root	root

Stream Type – RTMP(S)

<p>RTMP URL</p> <div style="background-color: #f0f0f0; height: 20px; width: 100%;"></div>	<p>RTMP URL</p> <p>Enter the RTMP URL obtained from any live streaming platform such as Ustream.</p> <p>Note: The NVS-31 supports RTMP Publish only and not RTMP Local.</p>
--	---

<p>RTMP URL</p> <div style="background-color: #f0f0f0; height: 20px; width: 100%;"></div>	<p>Stream Name</p> <p>Enter the stream name or key from any live streaming platform such as Ustream.</p>
--	---

<p>Account</p> <div style="background-color: #f0f0f0; height: 20px; width: 100%;"></div>	<p>Account</p> <p>Enter your RTMP account name.</p>
---	--

<p>Password</p> <div style="background-color: #f0f0f0; height: 20px; width: 100%;"></div>	<p>Password</p> <p>Enter the password of your RTMP account.</p>
--	--

<div style="border: 1px solid gray; padding: 5px;"> <p>Audio Only</p> <p>OFF ▼</p> <p style="background-color: #007bff; color: white; padding: 2px;">OFF</p> <p>Video Only</p> <p>Audio Only</p> </div>	<p>Audio Only</p> <p>In this option, the user is allowed to choose to stream Audio Only or Video Only. If disabled, video and audio streams will be delivered simultaneously.</p>
--	--

Stream Type – TS

<p>TS Port</p> <div style="background-color: #f0f0f0; padding: 5px;">12345</div>	<p>TS Port</p> <p>The TS port number is 12345 by default.</p>
---	--

<p>TS IP</p> <p>239.100.100.100</p>	<p>TS IP</p> <p>The TS IP address is 239.100.100.101 by default.</p>
<p>Video Only</p> <p>OFF ▼</p> <p>OFF</p> <p>ON</p>	<p>Video Only</p> <p>Enable this option if you just want to stream the video without the audio.</p>
Stream Type – SRT	
<p>SRT Port</p> <p>9001</p>	<p>SRT Port</p> <p>The SRT port is 9001 by default.</p>
<p>Play URL</p> <p>srt://192.168.1.60:9001</p>	<p>Play URL</p> <p>A stream URL will be generated after the Start button is clicked.</p>
Record Encoder Settings	
<p>Bitrate Mode</p> <p>Mid ▼</p> <p>High</p> <p>Mid</p> <p>Low</p>	<p>Bitrate Mode</p> <p>The bitrate mode sets the video bitrate mode for your video stream. The available modes are high, mid and low.</p> <p>Note: You are allowed to switch between different bitrate modes by pressing the Bitrate button on the Record/Stream panel. See section 5.4 for details.</p>
<p>Resolution</p> <p>Same as Input ▼</p> <p>Same as Input</p> <p>1920 × 1080</p> <p>1280 × 720</p> <p>960 × 540</p> <p>720 × 576</p> <p>720 × 480</p> <p>640 × 480</p> <p>320 × 240</p> <p>160 × 128</p>	<p>Resolution</p> <p>Recording resolution is the number of pixels (dots) used to create an image. Higher resolutions use more pixels to create an image. This means that greater amounts of detail can be expressed in the image, but larger files sizes and a greater amount of storage (i.e. hard drive space) are required to save the images or video.</p>


<p>Framerate</p> <ul style="list-style-type: none"> 30.00 ▾ Same as Input 60.00 50.00 <li style="background-color: #0070C0; color: white;">30.00 25.00 20.00 15.00 10.00 5.00 1.00 	<p>Frame Rate</p> <p>Frame rate greatly impacts the style and viewing experience of a video. Different frame rates yield different viewing experiences, and choosing a frame rate often means choosing between things such as how realistic you want your video to look, or whether or not you plan to use techniques such as slow motion or motion blur effects.</p> <p>Below is a list of common options for different applications:</p> <ul style="list-style-type: none"> • 24fps – This is the standard for movies and TV shows, and it was determined to be the minimum speed needed to capture video while still maintaining realistic motion. • 30fps – Videos with a lot of motion, such as sports, will often benefit from the extra frames per second. • 60+fps – Anything higher than 30fps is mainly used to create slow motion video or to record video game footage.
<p>Profile</p> <ul style="list-style-type: none"> High ▾ <li style="background-color: #0070C0; color: white;">High Main Baseline 	<p>Profile</p> <p>Profile sets the H.264 encoding profile for your recorder. The available options are Baseline, Main, and High. Typically, High profile provides the best image quality and is suitable in most instances.</p>
<p>Video Bitrate (bps)</p> <ul style="list-style-type: none"> 12 M ▾ 15 M <li style="background-color: #0070C0; color: white;">12 M 10 M 8 M 7 M 6 M 5 M 4 M 3 M 2.5 M 2 M 1.5 M 1 M 512 K 256 K 	<p>Video Bitrate (bps)</p> <p>The bitrate of the video specifies the amount of information stored in the video. The higher the bitrate is, the clearer the video is.</p> <p>Recommended video bitrate</p> <ul style="list-style-type: none"> • 720P or lower – 8 – 10 mbps • 1080P or higher – 15 mbps or higher

<p>Audio Bitrate (bps)</p> <p>128 K ▼</p> <p>384 K</p> <p>256 K</p> <p style="background-color: #007bff; color: white;">128 K</p> <p>64 K</p> <p>32 K</p>	<p>Audio Bitrate (bps)</p> <p>The NVS-31 offers the user the following audio bitrates at which you may want to record the audio. It is recommended to record at 128Kbps or higher.</p>
---	---

<p>GOP</p> <p>60 ▼</p> <p>180</p> <p>160</p> <p>140</p> <p>120</p> <p>100</p> <p style="background-color: #007bff; color: white;">60</p> <p>50</p> <p>30</p> <p>25</p> <p>20</p> <p>15</p> <p>10</p> <p>5</p> <p>3</p> <p>2</p> <p>1</p>	<p>GOP</p> <p>GOP pattern with longer GOP length encodes video very efficiently. Shorter GOP lengths usually work better with video that has quick movements, but they do not compress the data rate as much. Depending on your applications, the NVS-31 offers the user 16 GOP sizes ranging from 1 to 180.</p>
--	---

Record Settings

<p>File Name</p> <p>RECORD</p>	<p>File Name</p> <p>Enter the name of the recording file.</p>
<p>File Size</p> <p>4G ▼</p> <p>200M</p> <p>500M</p> <p>1G</p> <p>2G</p> <p style="background-color: #007bff; color: white;">4G</p>	<p>File Size</p> <p>Select the file size of a single recording file.</p>
<p>Recording File</p> <p>None</p>	<p>Recording File</p> <p>Display the file that is currently being recorded.</p>



Note: The record function is activated after the Start button is clicked. The REC indicator will appear as shown on the left. Flashing indicates that the record function is starting. A solid indicator means the record function has been activated successfully (The indicator flashing three times then turned off indicates errors). The activation time is approximately 2 to 3 seconds.

Storage

The web UI of the HS-1300's built-in video streaming server (NVS-31) also displays storage device information, allowing the user to view the SD card status. The Status page of the web UI is shown in the diagram below.



The screenshot shows the 'Storage Information' section of the web UI. It includes the following details:

- Vendor:** Unknown
- Product:** USB Storage
- Capacity:** 14.00G/14.56G (represented by a progress bar)
- Storage Format:** EXFAT

Below the information is a 'Format Storage Disk' button. The 'Storage Content' section shows an index of files on the SD card:


Name	Last Modified:	Size:	Type:
../	-	-	Directory
System Volume Information/	2018-Dec-18 10:28:26	-	Directory
RECORD_0001.mp4	2018-Nov-29 15:59:14	216.6K	application/octet-stream
RECORD_0002.mp4	2018-Nov-29 16:00:13	117.6K	application/octet-stream
RECORD_0003.mp4	2018-Dec-18 14:01:23	200.3M	application/octet-stream
RECORD_0004.mp4	2018-Dec-18 14:05:01	58.6M	application/octet-stream
RECORD_0005.mp4	2018-Dec-18 14:07:29	38.0M	application/octet-stream
RECORD_0006.mp4	2018-Dec-18 14:15:01	111.6M	application/octet-stream
RECORD_0007.mp4	2018-Dec-18 14:51:49	7.8M	application/octet-stream
RECORD_0008.mp4	2018-Dec-18 14:53:21	35.5M	application/octet-stream
RECORD_0009.mp4	2018-Dec-18 15:09:33	119.3M	application/octet-stream
RECORD_0010.mp4	2018-Dec-18 15:14:26	0.1K	application/octet-stream
RECORD_0011.mp4	2018-Dec-19 14:12:27	105.2K	application/octet-stream




Storage Device Information	
<p>Vendor: Unknown</p>	<p>Vendor Display of the manufacturer's information. Note that you should only use Class 10 SD card or above. See the Appendix, Recommended SD Cards, for a list of SD cards recommended by Datavideo.</p>
<p>Product: USB Storage</p>	<p>Product Display of the name of the SD card.</p>
<p>Capacity: 14.00G/14.56G</p>	<p>Capacity Display of the SD card's total capacity and the remaining capacity.</p>

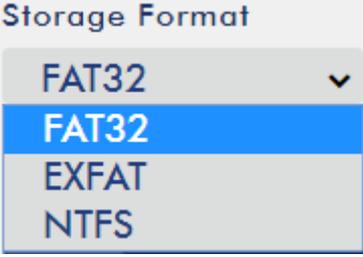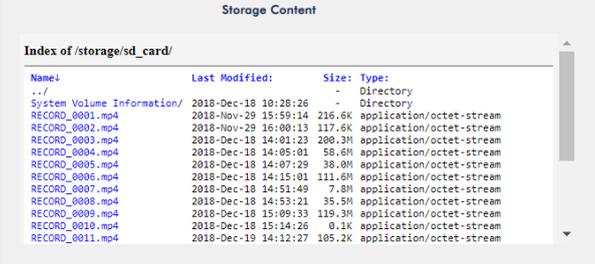	<p>Storage Format</p> <p>Select a storage format before clicking Format Storage Disk to format your SD card.</p> <ul style="list-style-type: none"> • FAT32 • EXFAT • NTFS
	<p>Storage Content</p> <p>Display of the SD card content.</p> <ul style="list-style-type: none"> • File name • Last Modified • Size • Type

CG

The CG function on the HS-1300's built-in video streaming server allows the user to place a textual layer on top of the video. The CG settings on the CG page are shown in the diagram below.

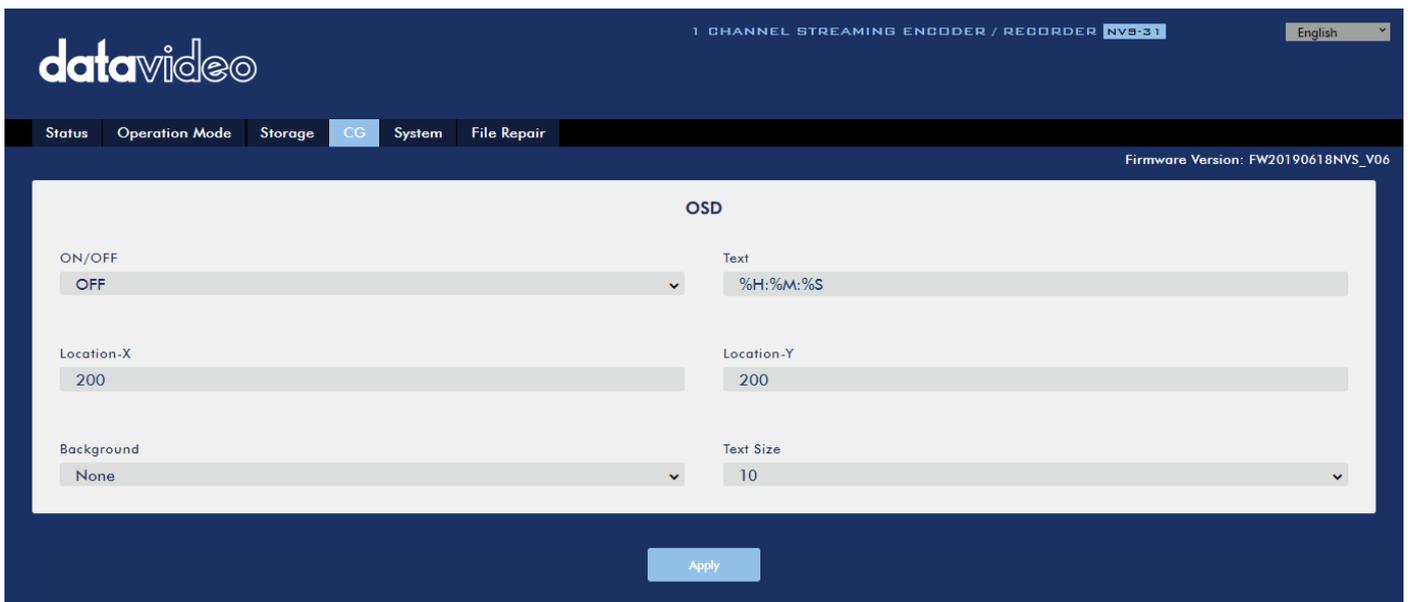

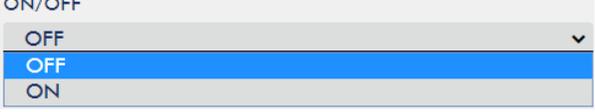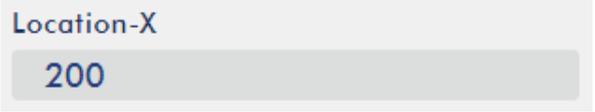CG Settings	
	<p>CG Enable/Disable</p> <p>Select ON/OFF from this drop-down menu to enable/disable the CG overlay function.</p>
	<p>Text</p> <p>Enter the text of the CG overlay.</p>
	<p>Location-X</p> <p>Enter the x-coordinate.</p>

<p>Location-Y</p> <p>200</p>	<p>Location-Y Enter the y-coordinate.</p>
<p>Background</p> <p>None</p> <p>None</p> <p>Black</p>	<p>Background You can either select a black background or none.</p>
<p>Text Size</p> <p>10</p> <p>8</p> <p>9</p> <p>10</p> <p>11</p> <p>12</p> <p>13</p> <p>14</p> <p>15</p> <p>16</p> <p>17</p> <p>18</p> <p>19</p> <p>20</p>	<p>Text Size Select the font size of your CG overlay text.</p>

System

The system page of the HS-1300’s built-in video streaming server allows the user to configure several network and system related settings such as **DHCP enable/disable, static IP address, subnet mask, default gateway, primary and secondary DNS**, and etc.

The system settings are **HLS preview enable/disable, time settings, firmware update, device name, and account login information**.

The system page is shown in the diagram below.

Network Setting

DHCP	Static IP
Enable(DNS AUTO)	192.168.1.60
Subnet Mask	Default Gateway
255.255.255.0	192.168.1.254
Primary DNS	Secondary DNS(Alternative)
MAC ADDRESS	
00:07:36:03:AA:01	

Submit

HLS Preview Setting

HLS Preview	Submit
OFF	

Time Setting

Type	Timezone	Submit
Manually	UTC+8	
Date	Time	
2019-06-20	14:15:05	

Firmware Update

File Path	Browse
	Update

Device Name Setting

Device Name	Submit

Account Setup

Original Account	Original Password	Apply

System Control

Restore to Default System Reboot

Network Settings	
<p>DHCP</p> <p>Enable(DNS AUTO) ▼</p> <p>Enable(DNS AUTO)</p> <p>Enable</p> <p>Disable</p>	<p>DHCP IP Assignment</p> <p>Select an option from this drop-down menu:</p> <ul style="list-style-type: none"> • Enable (DNS AUTO) • Enable • Disable
<p>Static IP</p> <p>192.168.1.60</p>	<p>Static IP Address</p> <p>The static IP field will be activated for the user to manually enter an IP address once the DHCP is disabled. The static IP is 192.168.1.60 by default.</p> <p>Tip: If you do not know the device's IP address, you can always use the following method to reset the network settings.</p> <ul style="list-style-type: none"> • Shut down the machine • Turn on the machine while holding down RECORD and STREAM buttons simultaneously. • Approximately after 5 seconds, release the RECORD and STREAM buttons as soon as the button LEDs are turned ON. • Fixed IP address is 192.168.1.60 by default.
<p>Subnet Mask</p> <p>255.255.255.0</p>	<p>Subnet Mask</p> <p>Static IP address mode requires subnet mask, which is 255.255.255.0 by default.</p>
<p>Default Gateway</p> <p>192.168.1.254</p>	<p>Default Gateway</p> <p>Static IP address mode requires default gateway, which is 192.168.1.254 by default.</p>
<p>Primary DNS</p> <p></p>	<p>Primary DNS (Optional)</p> <p>Primary DNS is required in static IP mode only but optional.</p>
<p>Secondary DNS(Alternative)</p> <p></p>	<p>Secondary DNS (Optional)</p> <p>Secondary DNS is required in static IP mode only but optional.</p>
<p>MAC ADDRESS</p> <p>00:07:36:03:C0:20</p>	<p>MAC Address</p> <p>Display of NVS-31's MAC address.</p>
<p><input type="button" value="Submit"/></p>	<p>Submit Button</p> <p>After the network settings are configured, click the Submit button to save the new settings.</p>
<p>HLS Preview</p> <p>OFF ▼</p> <p>OFF</p> <p>ON</p> <p><input type="button" value="Submit"/></p>	<p>HLS Preview</p> <p>Here you will be able to enable/disable HLS preview. Click the Submit button to save the new settings.</p>

Time Setting

Type

Manually ▼

Automatically from the internet

Manually

Type

In this drop-down menu, you can either select to allow the device to retrieve the time automatically from the Network Time Protocol (NTP) server or manually select a time zone from the Time Zone drop-down menu.

Timezone

UTC+8 ▼

UTC-12

UTC-11

UTC-10

UTC-9

UTC-8

UTC-7

UTC-6

UTC-5

UTC-4

UTC-3

UTC-2

UTC-1

UTC+0

UTC+1

UTC+2

UTC+3

UTC+4

UTC+5

UTC+6

UTC+7

UTC+8

UTC+9

UTC+10

UTC+11

UTC+12

Time Zone

Click the drop-down menu to select a time zone for your device.

Date

2018-12-19

Time

15:16:38

Date/Time

Date and Time fields show the device's system date and time values.

June 2019

Su Mo Tu We Th Fr Sa

						1
2	3	4	5	6	7	8
9	10	11	12	13	14	15
16	17	18	19	20	21	22
23	24	25	26	27	28	29
30						


You will see the calendar on the left after clicking the Date field. Simply click a day to set the date.

	<p>Click the Submit button to save the new settings.</p>
<h3>Firmware Update</h3>	
<p>File Path</p> <input type="text"/> <input type="button" value="Browse"/> <input type="button" value="Update"/>	<p>NVS-31 Firmware Update Click the Browse button to search for the latest firmware file saved on the PC's hard disk. Click the Update button after the latest firmware file is uploaded.</p>
<h3>Device Name Setting</h3>	
<p>Device Name Setting</p> <p>Device Name</p> <input type="text"/> <input type="button" value="Submit"/>	<p>Device Name Setting Enter a name for this device and click the Submit button to write this name into the device.</p>
<h3>Account Setup</h3>	
<p>Account Setup</p> <p>Original Account <input type="text"/> Original Password <input type="password"/></p> <input type="button" value="Apply"/>	<p>Account Setup Enter the NVS-31's account name and password. Click the Apply button to save the new settings.</p>
<h3>System Control</h3>	
 	<p>Restore to Default Click this button to restore default settings on the system page.</p> <p>System Reboot Click this button to reboot the NVS-31.</p>

File Repair


The system may crash while the recording is in progress. If this happens, your record file may be damaged. To repair a damaged file, go the **File Repair** page to run the file repair process.

1. Open the "**File Repair**" page and click the "**File List**" drop-down menu to select the damaged MP4 file.

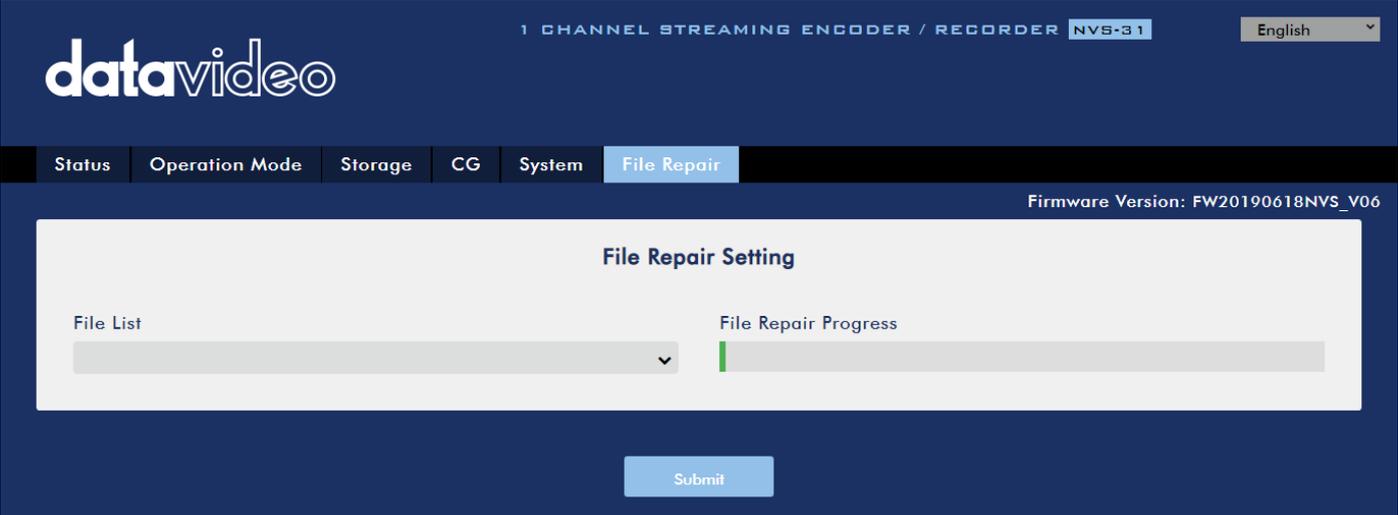


The screenshot shows the 'File Repair Setting' page in the datavideo interface. At the top, it displays '1 CHANNEL STREAMING ENCODER / RECORDER NVS-31' and a language dropdown set to 'English'. A navigation bar includes 'Status', 'Operation Mode', 'Storage', 'CG', 'System', and 'File Repair' (which is highlighted). Below the navigation bar, the 'File Repair Setting' section contains a 'File List' dropdown menu and a 'File Repair Progress' progress bar. A 'Submit' button is located at the bottom of the page.

2. If the MP4 file can be repaired, you will see a pop-up dialogue box prompting “MP4_FIX_OK”, click **OK** then the “**Submit**” button.

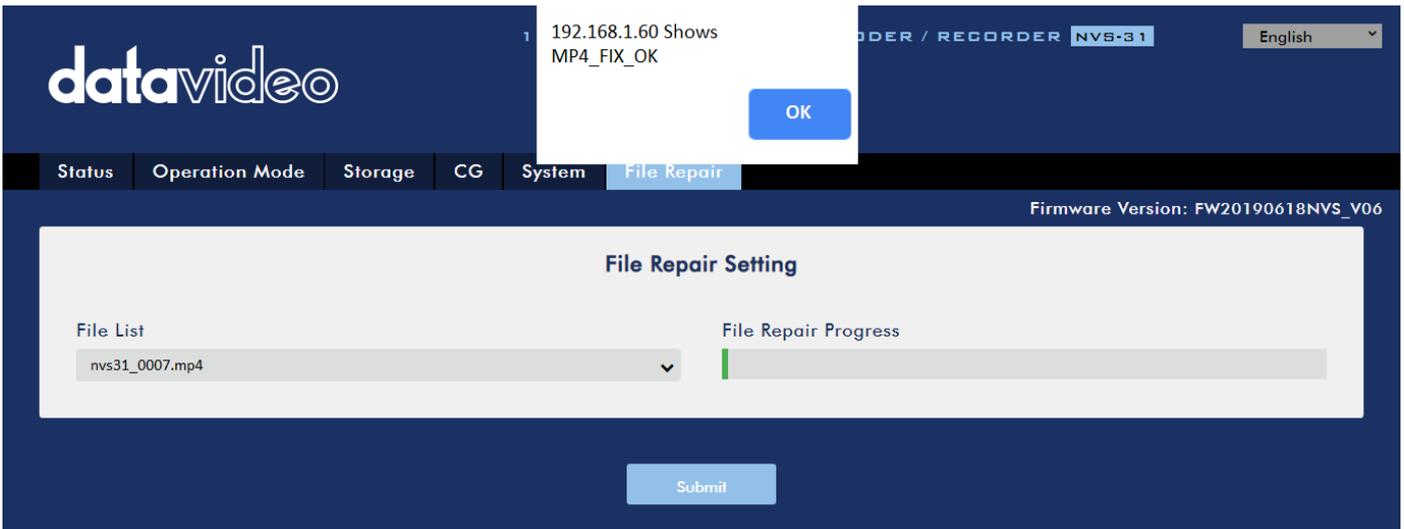


Note: If the selected MP4 file cannot be repaired, a dialogue box prompting “MP4_FIX_ERROR_MDATA” will pop up.

3. The file is repaired when you see a dialogue box prompting “**File repair finish!!**”. Click **OK** and reboot the NVS-31.

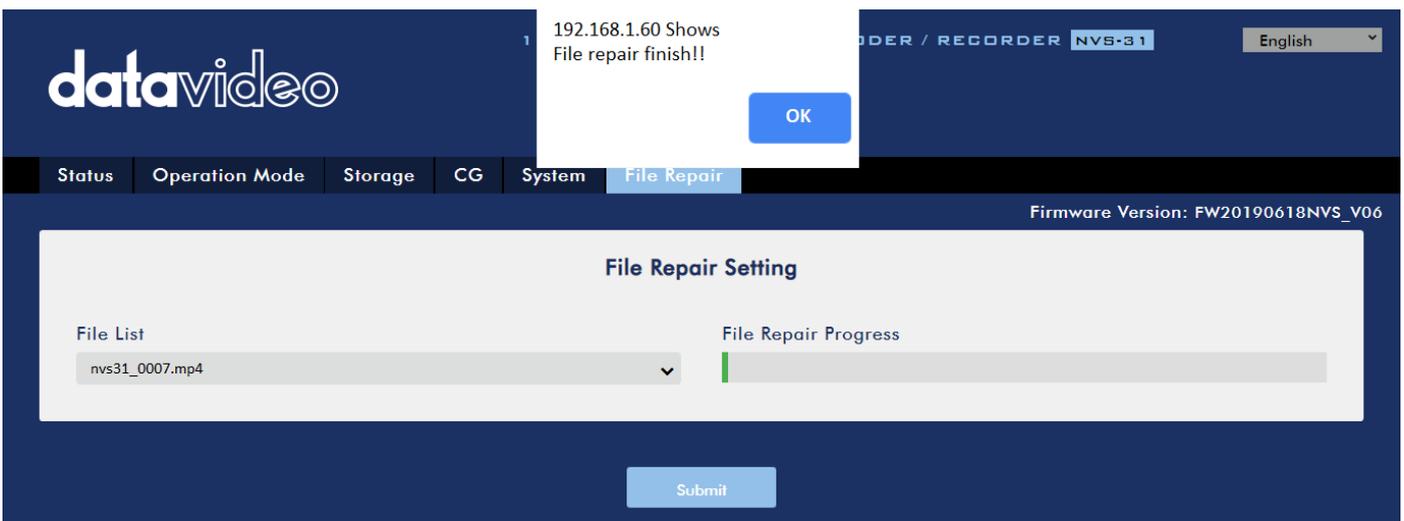

4. After the NVS-31 successfully reboots, you will see the repaired file with the file name of the damaged file appended of the word “**new**”.

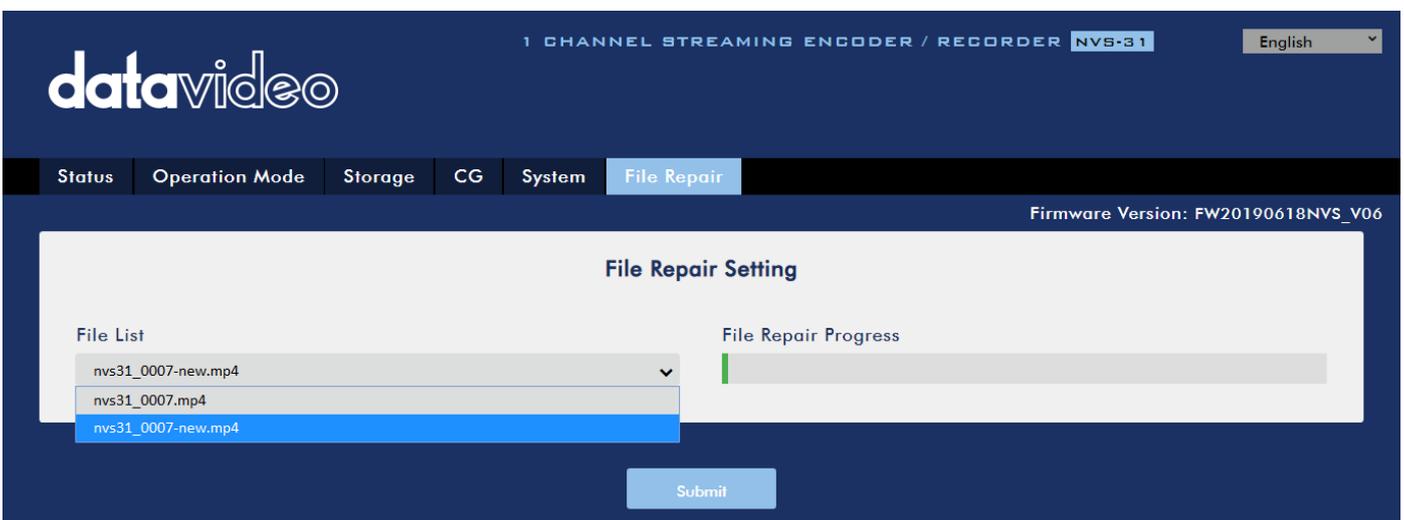

5.3 Operations

In this section, we will discuss how you can play the video using different streaming protocols and how to place texts on your video.

Video Streaming

The NVS-31 provides the user with different video streaming options such as RTSP, TS, RTMP(S), HLS, and SRT.

This section discusses settings of these options and how to stream your video using these methods.

RTSP/TS/HLS/SRT

In the **RTSP/TS/HLS/SRT** modes, the **NVS-31** is a stream server which allows any client device to connect and playback your video stream. However, if you would like to stream to multiple client devices, we recommend using a separate media server to set up your streaming environment.



The following operation procedure uses VLC media player to playback video stream. If your PC or laptop does not have VLC media player installed, please visit VideoLAN's official homepage (<https://www.videolan.org/>) and download the installation file then install the program.

Follow the steps below to obtain the RTSP URL:


1. Open the stream settings page
2. Select RTSP




3. Click the **Start** button to generate the RTSP URL.




4. Based on your settings, the device will automatically generate the RTSP URL.

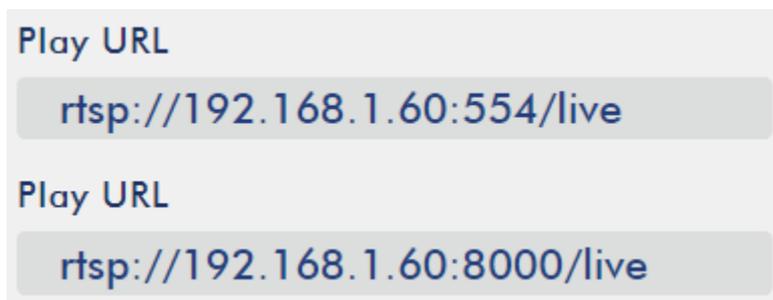

5. Before streaming the video via RTSP, enter the RTSP URL into the client device.
6. Open VLC then click **Open Network Stream** (shown in the diagram below).

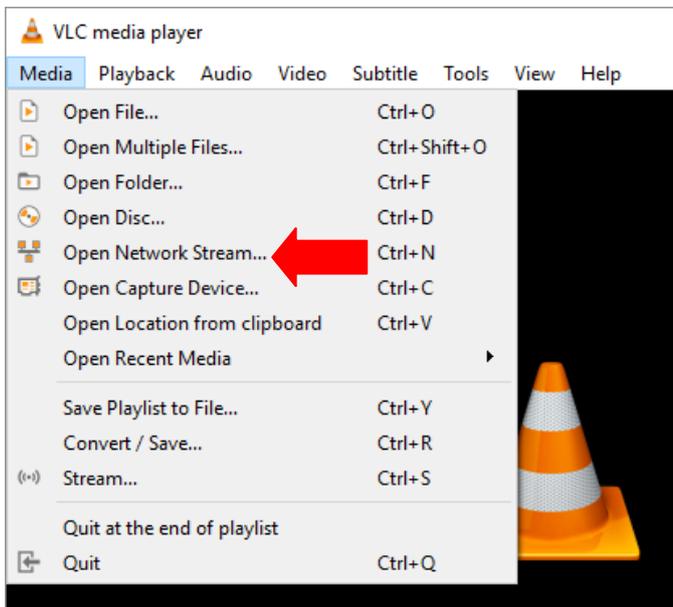

7. As shown in the diagram below, enter the stream URL then click **Play** to start streaming.

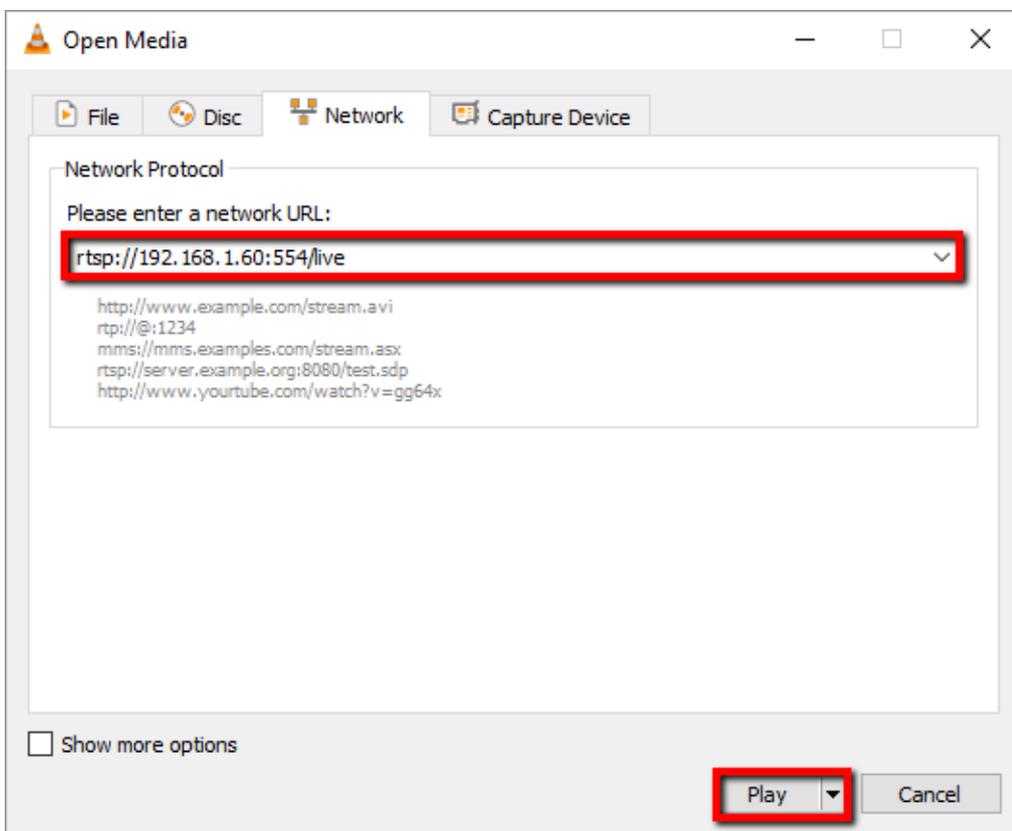


Follow the steps below to obtain the TS URL:


1. Open the stream settings page
2. Select TS.



3. Enter the TS port number which is 12345 by default.

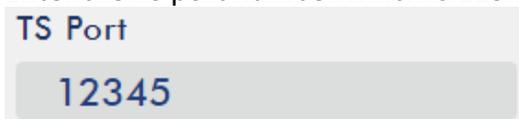


- In the TS IP field, enter your PC's IP address such as 192.168.1.66.

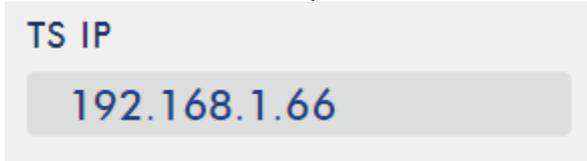


- Click the **Start** button to generate the TS URL which, in this example, will be `udp://@192.168.1.66:12345` as shown in the diagram below.



- Before streaming the video via TS, enter the TS URL into the client device.
- Open VLC then click **Open Network Stream** (shown in the diagram below).

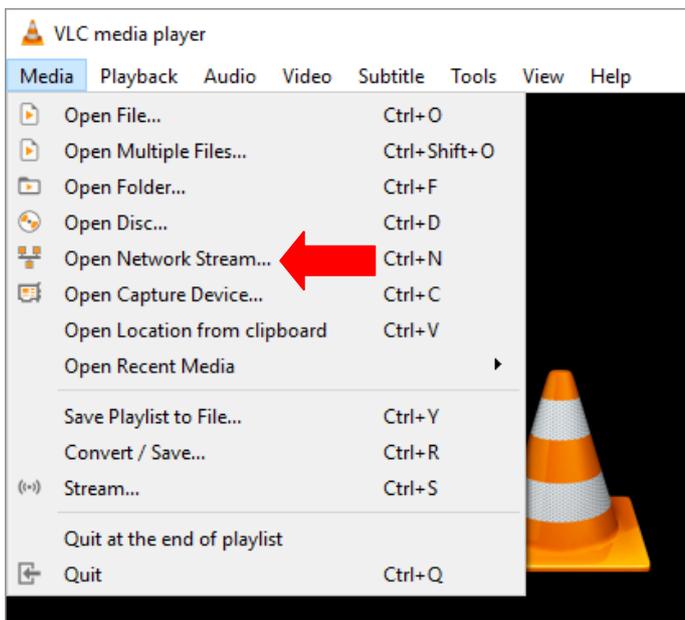

- As shown in the diagram below, enter the stream URL then click **Play** to start streaming.

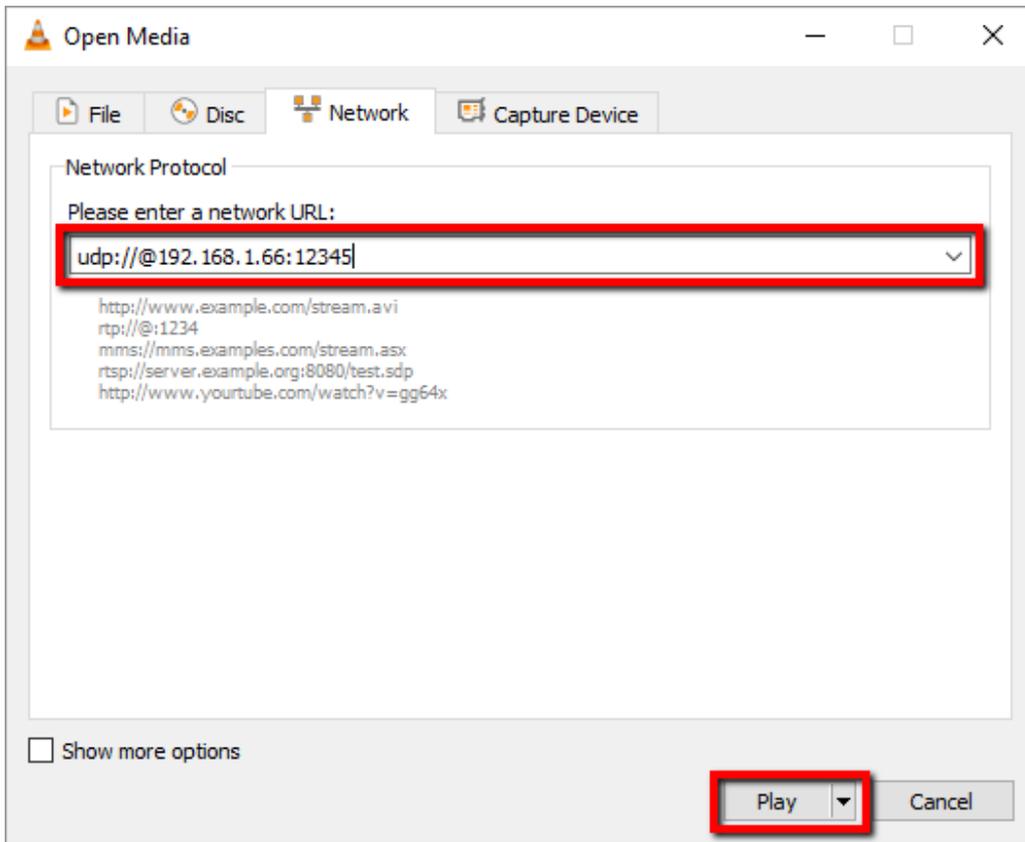

Follow the steps below to obtain the HLS URL:


1. Open the stream settings page
2. Select **HLS**




3. Click the **Start** button to generate the HLS URL.




4. Based on your settings, the device will automatically generate a .m3u8 stream URL as shown below.

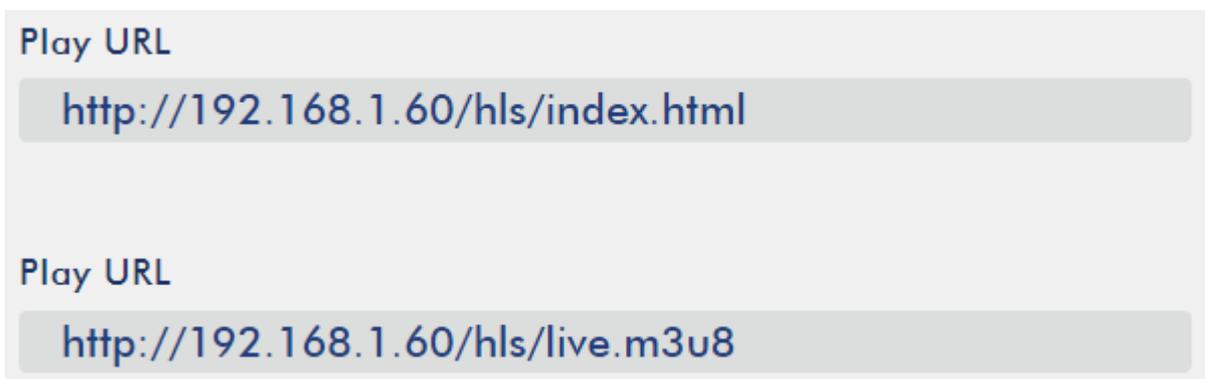

5. Before streaming the video via **HLS**, enter the **HLS** URL into the client device.
6. Open VLC then click **Open Network Stream** (shown in the diagram below).

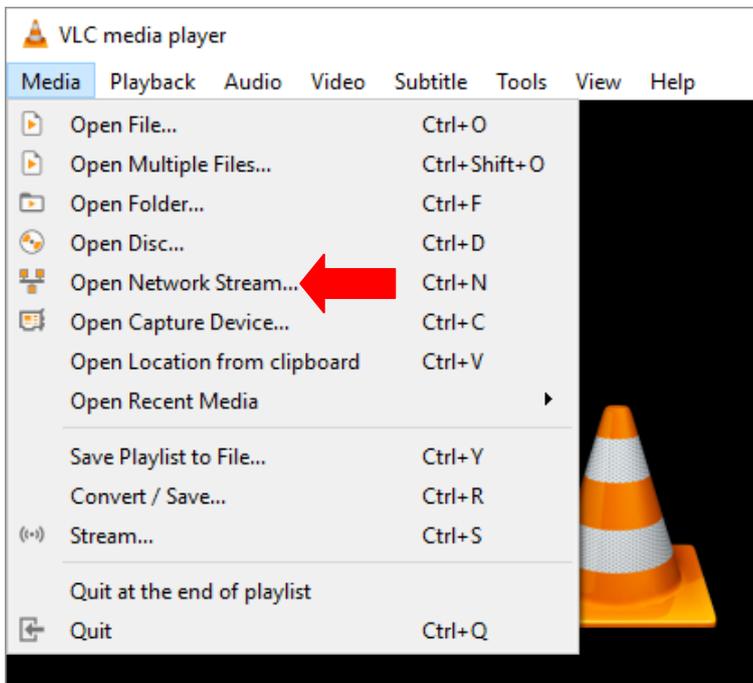

7. As shown in the diagram below, enter the stream URL then click **Play** to start streaming.

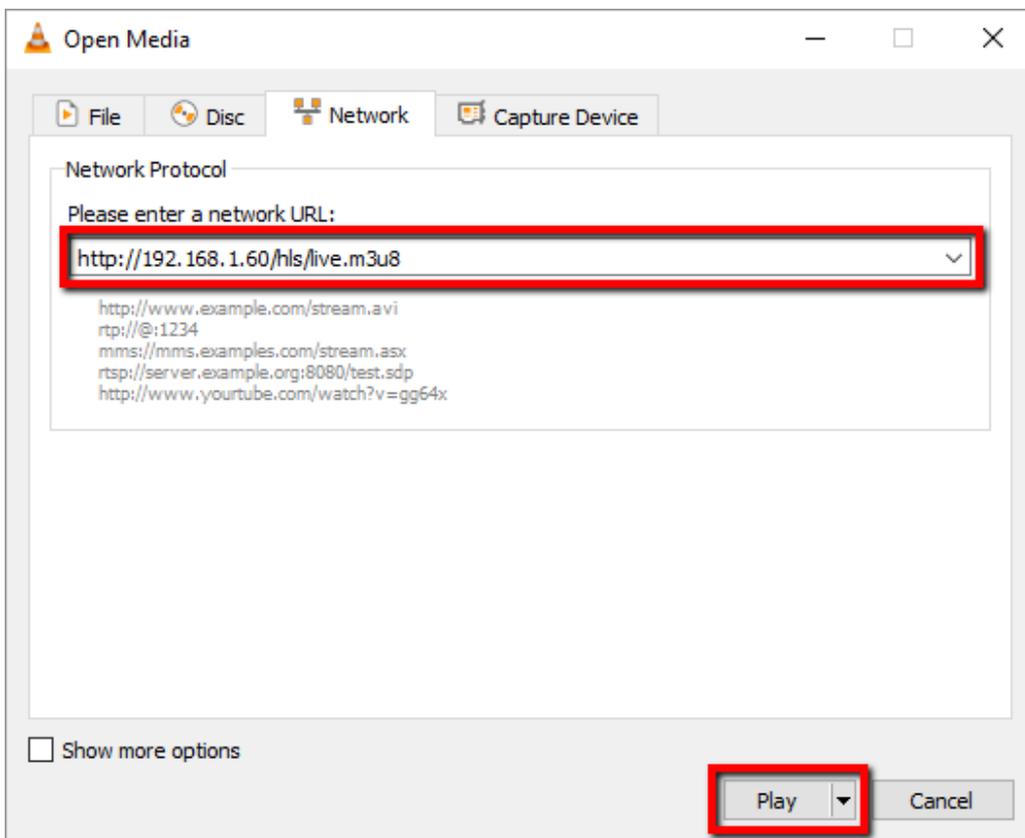

8. You can also play .m3u8 stream URL using the devices listed as follows:
- iPhone, iPad and MacBook: Use Safari to open the .m3u8 stream URL.
 - Windows 10: Use Microsoft Edge to open the .m3u8 stream URL.

Follow the steps below to obtain the SRT URL:

1. Open the stream settings page
2. Select **SRT** and the **SRT port number** is 9001 by default.

Stream Type	SRT Port
SRT	9001


3. Click the **Start** button to generate the SRT URL.




4. Before streaming the video via **SRT**, enter the **SRT** URL into the client device.

Play URL
srt://192.168.1.60:9001

5. Open VLC then click **Open Network Stream** (shown in the diagram below).

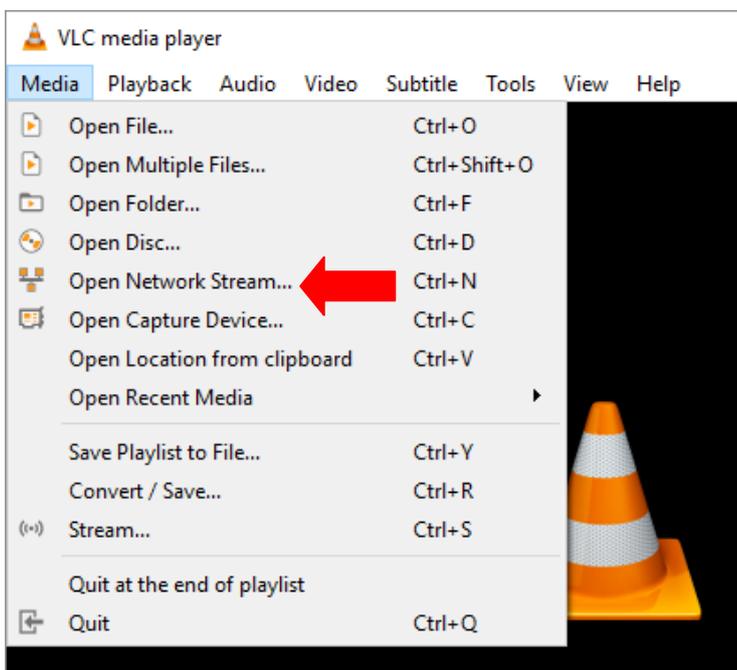

6. As shown in the diagram below, enter the stream URL then click **Play** to start streaming.

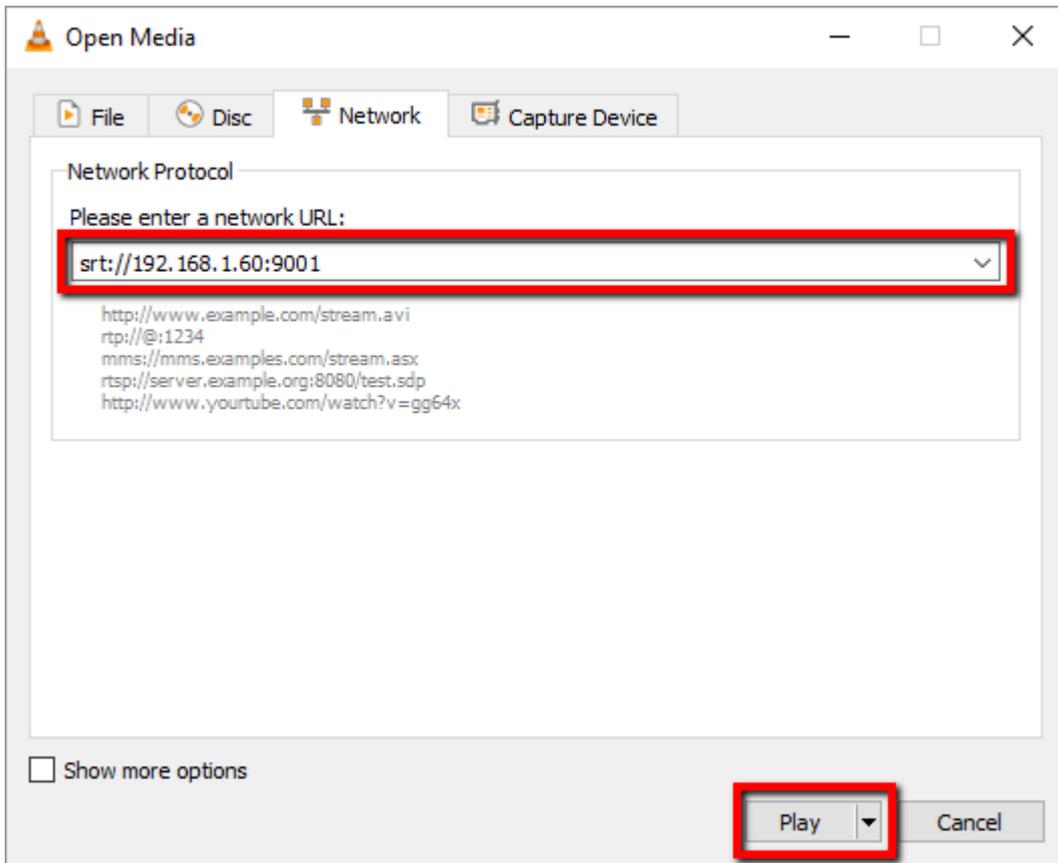


RTMP(S)

In the **RTMP(S)** mode, the NVS-31 can only send one data stream to one CDN or media server that supports the **Real-Time Messaging Protocol or the Real-Time Messaging Protocol over an TLS/SSL connection**. Examples of the **RTMP(S)** media server are **USTREAM** and **Youtube**.

Note: The NVS-31 supports RTMP only and not the RTMP local.

In the following section, we will show you how to set up an **RTMP(S)** stream to **Youtube**. The step-by-step account setup is outlined as follows:

1. First of all, you have to obtain Server URL and Stream name/key from Youtube.
2. Open the Youtube Live Dashboard https://www.youtube.com/live_dashboard
3. On the left column, locate and click **“Stream now.”**

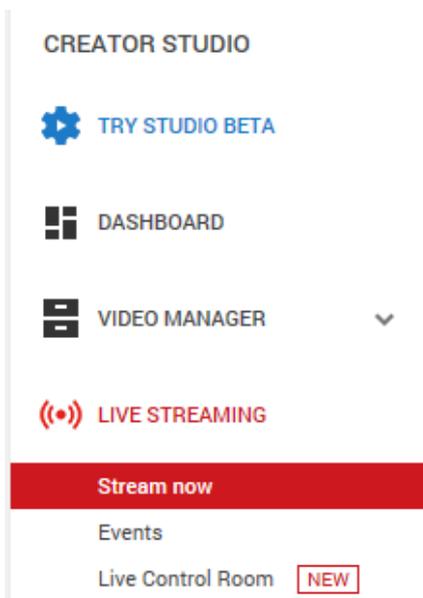

4. On the right, scroll down to the bottom where you will be able to find **Server URL** and **Stream name/key**.

ENCODER SETUP ⋮

Server URL

Stream name/key

 Anyone with this key can live stream on your YouTube channel. Keep it secret.

5. On the NVS-31, open the **Stream Only** operation mode page.
6. Select **RTMP** from the Stream Type drop-down menu.

Stream Type

RTMP 

7. Enter the **Server URL (rtmp://a.rtmp.youtube.com/live2)** obtained from the **Youtube Live Streaming** page into the **RTMP URL** field.

RTMP URL

8. Enter the **Stream name/key (yr69-4js9-yf3w-bg6m)** obtained from the **Youtube Live Streaming** page into the **StreamName** field.

StreamName

9. As required by the live streaming channel, enter your Youtube account name and password into the **Account** and **Password** fields.

Account	Password
<input type="text"/>	<input type="text"/>

10. Click the **Start** button to start streaming the live video on the **Youtube Live Streaming** page. You should also see an **RTMP URL** generated.
11. The **RTMP URL** is another alternative that allows you to view the live stream on a web browser. Enter the **RTMP URL** into the web browser's address bar then hit the **Enter** button to open the live video stream.
12. Click the **Stop Stream** button to stop live streaming.


Stop

Tip: You are allowed to stream audio or video only.

Text Overlay Video

The HS-1300's built-in video streaming server not only allows you to stream and record your program, it also features a CG tool that is capable of overlaying text on the video currently being broadcast.

The CG settings page is shown below:

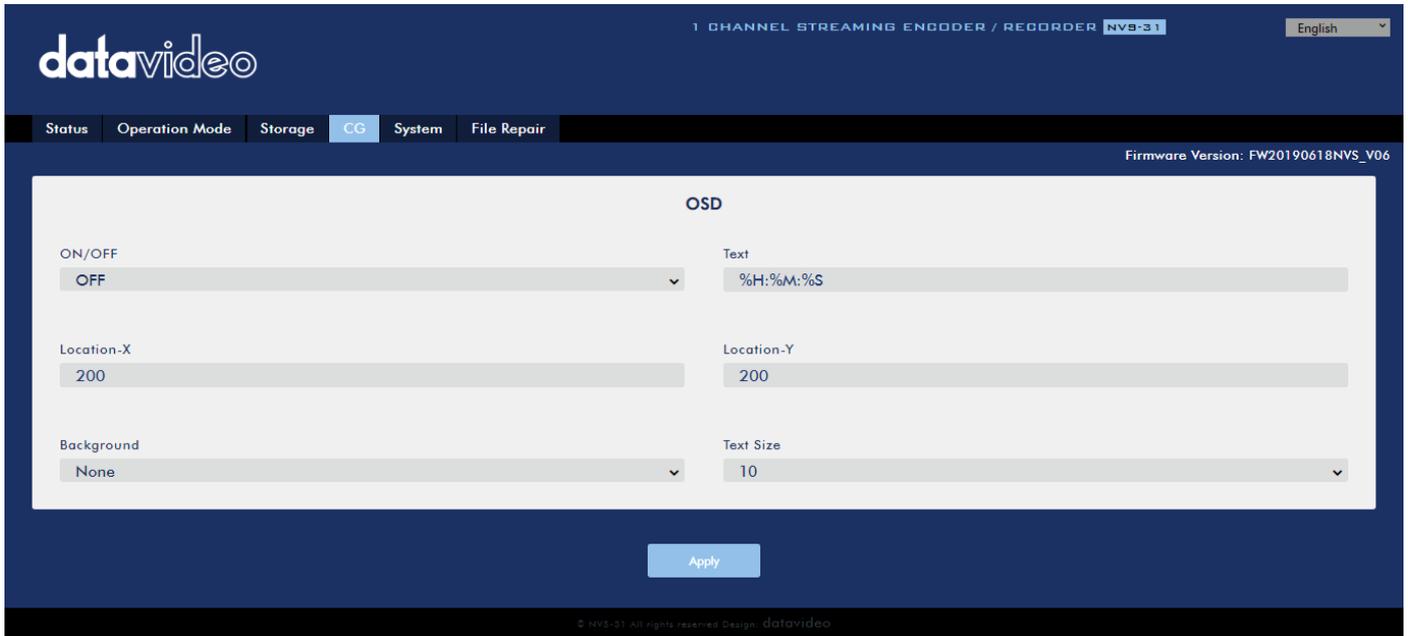


Follow the steps below to overlay text on the video:


1. Open the **CG** settings page.
2. Enable the CG function.
3. In the **Text** field, enter the overlay text.
4. Enter the **X and Y coordinates** to set the text position.
5. Click the **Apply** button to save the new settings.

Note: Increasing the X coordinate moves the overlay text to the right and decreasing the X coordinate moves the overlay text to the left; increasing the Y coordinate moves the overlay text up and decreasing the Y coordinate moves the overlay text down.

5.4 Stream and Record Buttons

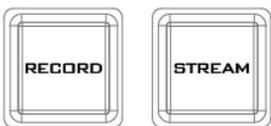

The **RECORD** and **STREAM** buttons on the front panel of the HS-1300 give the user certain controls of the record and stream functions. In this section, we will cover operations of these two buttons in detail.

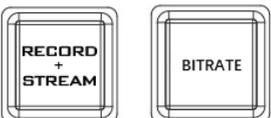

Button LED behaviors and their corresponding states are listed in the table below:

	RECORD Button	STREAM Button	RECORD+STREAM Button
Solid White	Record function in idle state	Stream function in idle state	Record/Stream functions in idle state simultaneously
Blinking Red	Record function is activating or resetting	Stream function is activating or resetting	Record/Stream functions are activating or resetting simultaneously

Solid Red	Record function activated	Stream function activated	Record/Stream functions are activated simultaneously
-----------	---------------------------	---------------------------	--

Record Button

Start recording

- When idle, the **RECORD** button is solid white.
- Press and hold the **RECORD** button for approximately 2 seconds.
- When the record function is activating, the **RECORD** button turns from solid white, then blinking red and finally to solid red.
- When the **RECORD** button is solid red, this indicates that the record function has been successfully activated.

Note: The RECORD button is disabled in the Stream Only mode.

Stop recording

- While recording, the **RECORD** button is solid red.
- Press and hold the **RECORD** button for approximately 2 seconds.
- When the record function is terminating, the **RECORD** button turns from solid red, then blinking red and finally to solid white.
- When the **RECORD** button is solid white, this indicates that the record function has been successfully terminated.

Stream Button

Start streaming

- When idle, the **STREAM** button is solid white.
- Press and hold the **STREAM** button for approximately 2 seconds.
- When the stream function is activating, the **STREAM** button turns from solid white, then blinking red and finally to solid red.
- When the **STREAM** button is solid red, this indicates that the record function has been successfully activated.

Note: The STREAM button is disabled in the Record Only mode.

Stop streaming

- While streaming, the **STREAM** button is solid red.
- Press and hold the **STREAM** button for approximately 2 seconds.
- When the stream function is terminating, the **STREAM** button turns from solid red, then blinking red and finally to solid white.
- When the **STREAM** button is solid white, this indicates that the stream function has been successfully terminated.

Record+Stream Button

Start recording/streaming simultaneously

- When idle, the **RECORD+STREAM** button is solid white.
- Press and hold the **RECORD+STREAM** button for approximately 2 seconds.

- When the record and stream functions are activating simultaneously, the **RECORD+STREAM** button turns from solid white, then blinking red and finally to solid red.
- When the **RECORD+STREAM** button is solid red, this indicates that the record and stream functions have been successfully activated.

Stop recording/streaming simultaneously

- While recording and streaming simultaneously, the **RECORD+STREAM** button is solid red.
- Press and hold the **RECORD+STREAM** button for approximately 2 seconds.
- When the record and stream functions are terminating, the **RECORD+STREAM** button turns from solid red, then blinking red and finally to solid white.
- When the **RECORD+STREAM** button is solid white, this indicates that the record and stream functions have been successfully terminated.

Bitrate Button

Follow the steps below to switch the stream bitrate mode using the **BITRATE** button:

- Press and hold one of the **RECORD+STREAM** button, the **RECORD** button, and the **STREAM** button until the pressed button starts blinking red.
- Continue holding down one of the **RECORD+STREAM** button, the **RECORD** button, and the **STREAM** button while pressing the **BITRATE** button to switch stream bitrate mode (H, M or L).

Note: The system will return to the original setting if the BITRATE button is not pressed. The default bitrate is M.

Operation Mode

Checking the NVS-31's operation mode

Follow the steps below to check the NVS-31's current operation mode:

- First make sure the stream and record functions are in idle state, i.e. **STREAM** and **RECORD** buttons are solid white.
- Press **RECORD** or **STREAM** button.
- The button LED should behave according to the device's operation mode. The LED behaviors are summarized in the table below:

	Solid red RECORD button	Solid white RECORD button
Solid red STREAM button	Stream & Record	Stream Only Mode
Solid white STREAM button	Record Only Mode	None

- The two buttons turn solid white a few seconds after displaying the operation mode.

Switching operation modes

Follow the steps below to switch to the next operation mode:

- First make sure the stream and record functions are in idle state, i.e. **STREAM** and **RECORD** buttons are solid white.
- Simultaneously press and hold the **RECORD** and **STREAM** buttons for more than 3 seconds but less than 10 seconds.

- As the operation mode switches, both the **RECORD** and **STREAM** buttons turn from solid red, then blinking red and finally to solid white.
- When the **RECORD** and **STREAM** buttons turn solid white, it indicates that the NVS-31 has been switched to the next operation mode successfully.

Note: The order of the operation mode change is Stream & Record → Stream Only → Record Only

Checking the next operation mode

Follow the steps below to check the operation mode next to the NVS-31's current operation mode before switching:

- First make sure the stream and record functions are in idle state, i.e. **STREAM** and **RECORD** buttons are solid white.
- Simultaneously press and hold the **RECORD** and **STREAM** buttons for more than 1 second but less than 3 seconds.
- The button LED should behave according to the device's next operation mode. The LED behaviors are summarized in the table below:

	Solid red RECORD button	Solid white RECORD button
Solid red STREAM button	Stream & Record	Stream Only Mode
Solid white STREAM button	Record Only Mode	None

- The two buttons turn solid white a few seconds after displaying the operation mode.

Note: The order of the operation mode change is Stream & Record → Stream Only → Record Only

5.5 Restoring Factory Defaults

Execute the following steps to restore the NVS-31's factory defaults.

- The **RECORD** and **STREAM** buttons are either solid white and solid red, which means the factory defaults can be restored regardless of the state of the device.
- Press and hold the **RECORD** and **STREAM** buttons simultaneously for more than 10 seconds.
- While the NVS-31's factory defaults are being restored, the **RECORD**, **STREAM**, **RECORD+STREAM** and **BITRATE** buttons turn solid red, then blinking red and finally to solid white.
- When the **RECORD**, **STREAM**, **RECORD+STREAM** and **BITRATE** buttons turn solid white, it indicates that the NVS-31's factory defaults have been successfully restored.

5.6 Firmware Update

Datavideo usually releases new firmware containing new features or reported bug fixes from time to time. This section outlines the firmware upgrade process which should take **approximately 10 minutes to complete**. See [Appendix 1](#) for instructions.

Chapter 6 Advanced Operations

6.1 Still Images

This section will show you how to import still images from the PC to the switcher and load the imported file to the switcher. You are also allowed to export still images from the switcher to the PC for file editing.

Export/Import Still Images to/from the PC

The switcher’s Image Import/Export software (**SwitcherImageImEx_vx.x.x.msi**) allows the user to import still pictures from the PC to the designated Still number of the switcher and vice versa. **The software installation package can be downloaded from the product page.** Features of the Import/Export software are listed as follows:

- Supported file formats are BMP, JPG, PNG, and PIC.
- Minimum resolution is 1280 x 720.
- Independent exported still pictures in BMP format.


Please follow the steps below to set up the system before installing the software.

- First connect the HS-1300 to a Windows computer using an RJ-45 Ethernet cable.
- Since the HS-1300 has a default IP address of 192.168.100.101 so the computer should be given the IP settings that match the same IP range as the switcher.
- Turn on the Windows computer and manually set the IP to 192.168.100.X within the **Windows Network and Sharing Centre**.


After the connection is successfully established, the system setup is complete. Now install the **Switcher Image Import/Export utility** on the computer.

Installation


1. Download SwitcherImageImEx_vx.x.x.msi from the product page and save it on the local disk.
2. Click the installation file icon to start the Setup Wizard.
3. Click **“Next”**

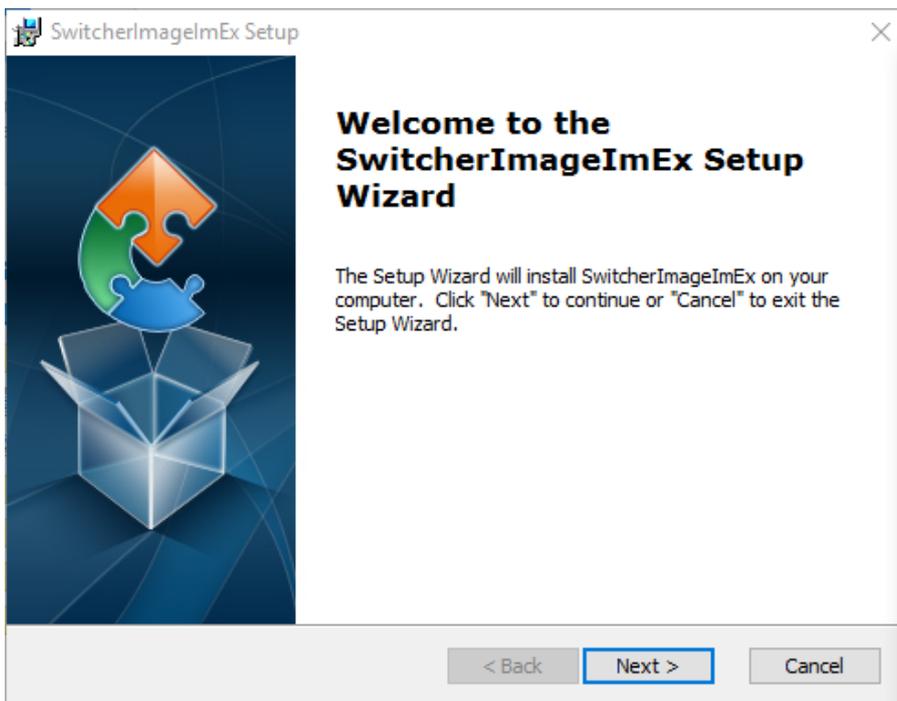


4. Click "Install"

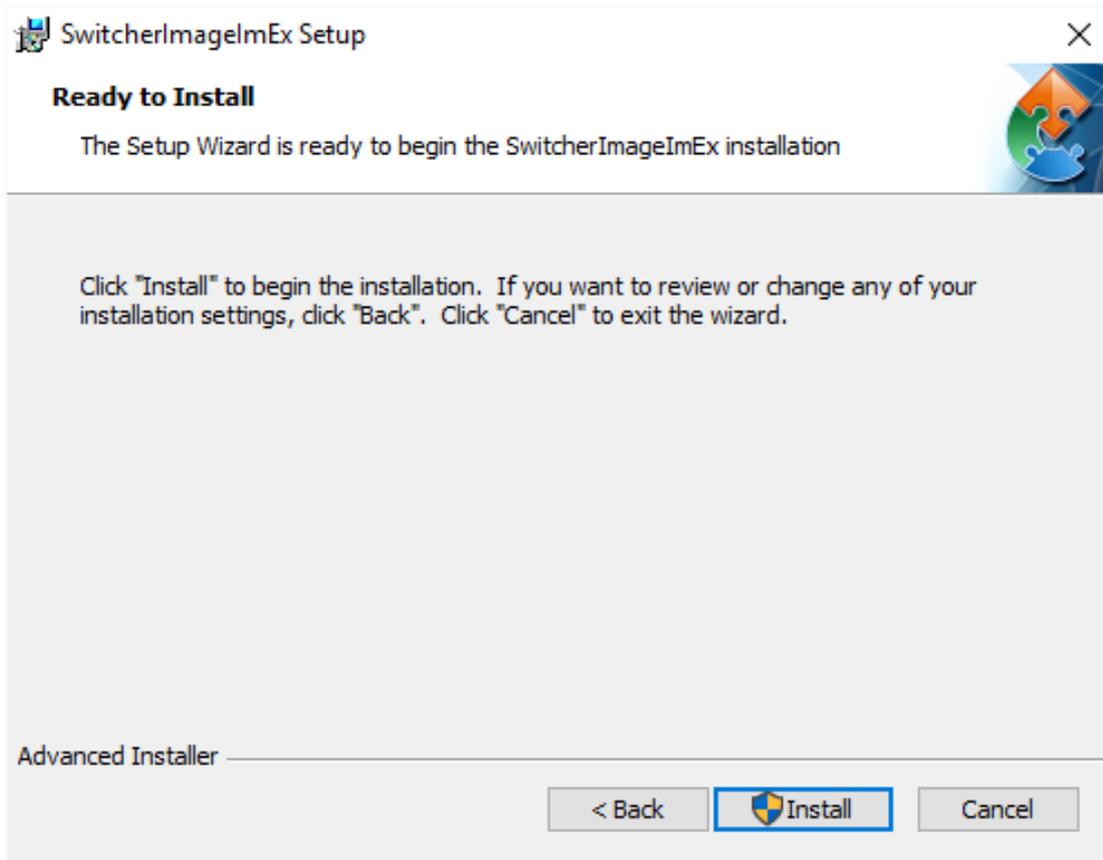


5. When you see the safety warning requesting for permission to allow an unknown publisher to make changes to the PC, please click "Yes" to continue.

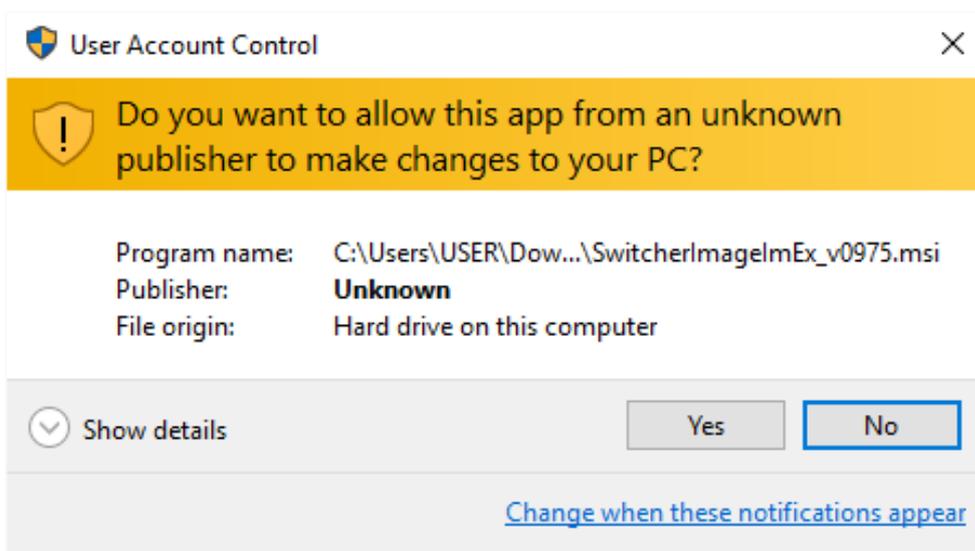


6. Wait for the installation to finish.

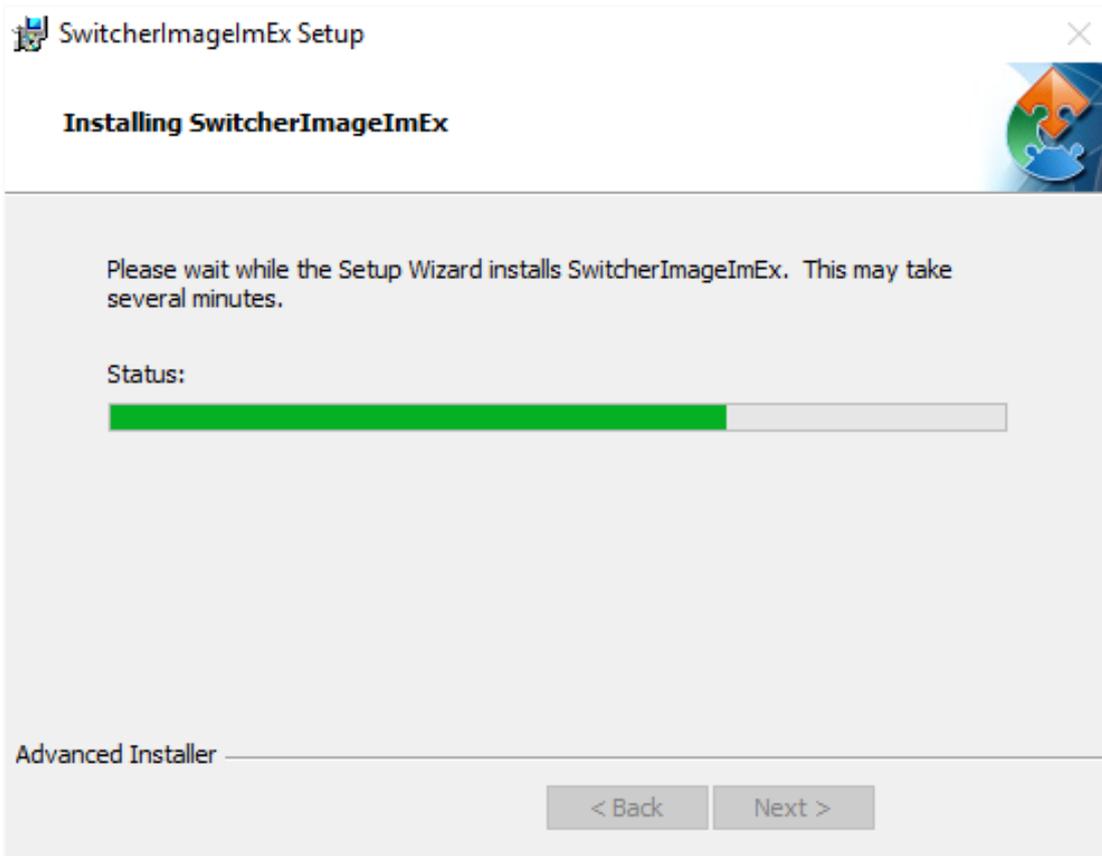

7. After the setup is complete, you will see the following window; click "Finish" to launch SwitcherImageImEx immediately.

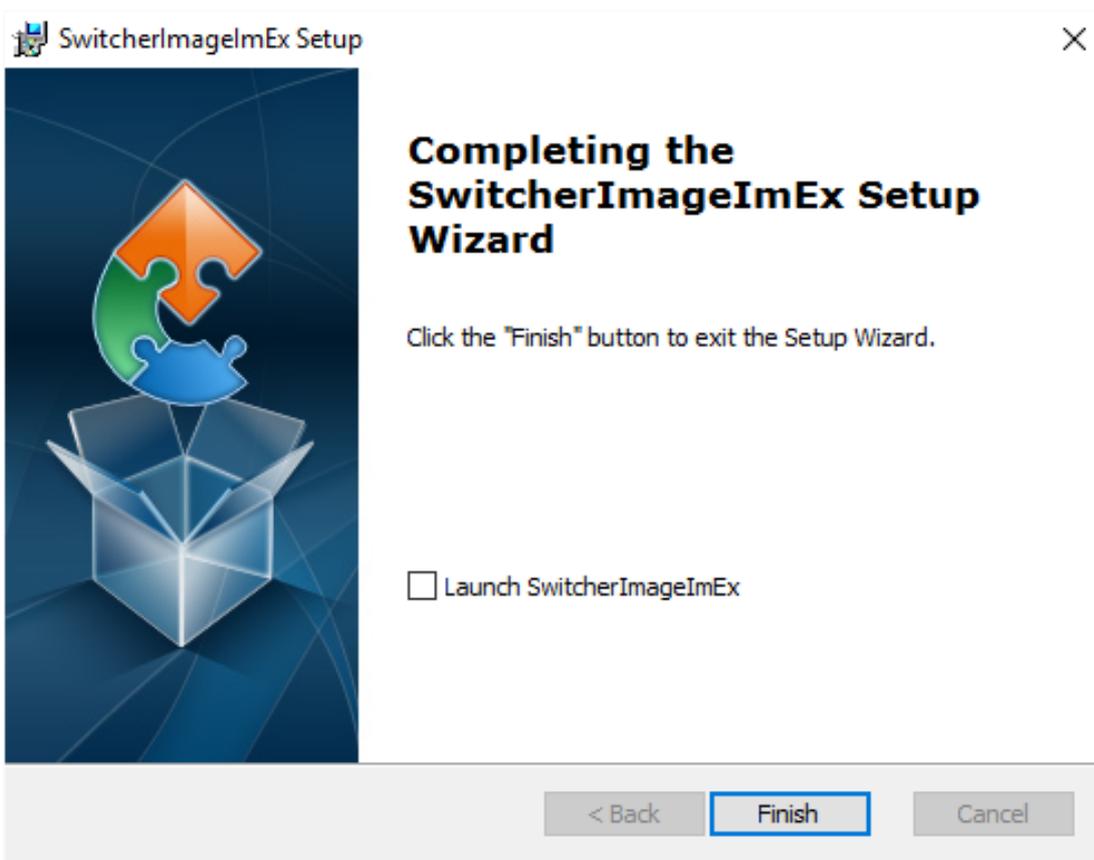


8. After the setup is finished, a shortcut will be created in Start Menu > Programs > datavideo > tools > SwitcherImageImEx

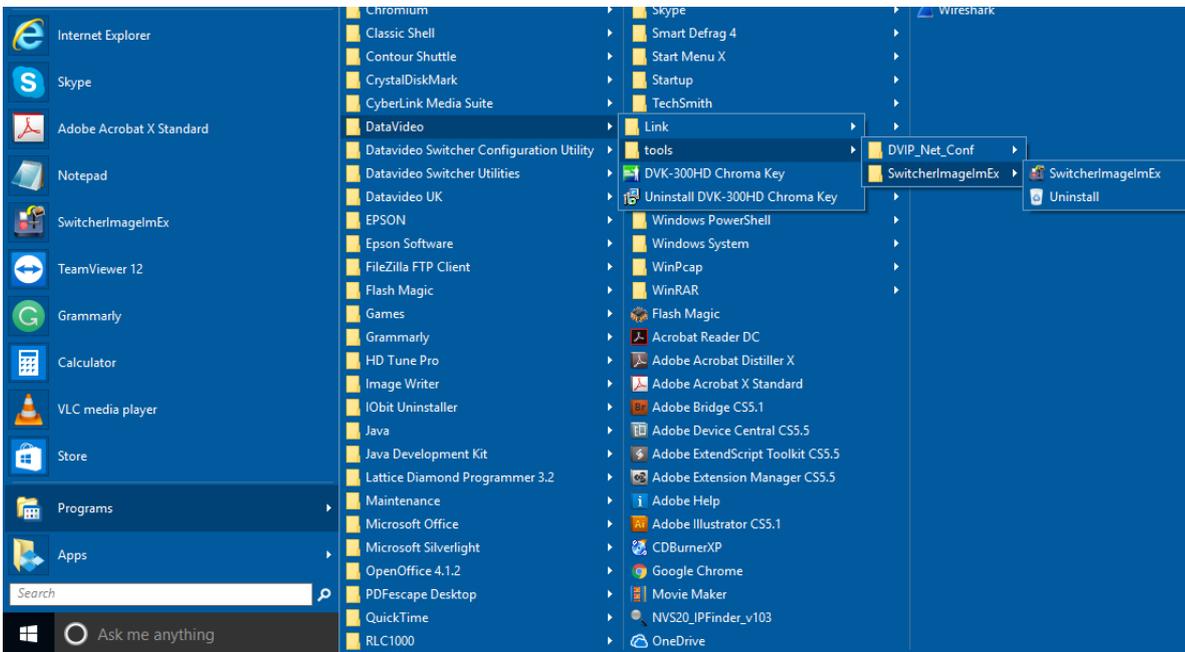


9. Click SwitcherImagelmEx to open the program.

How to use

1. When the program is executed for the first time, it will automatically scan the network and if multiple network interface cards are found, please select the card that is on the same network as the device.

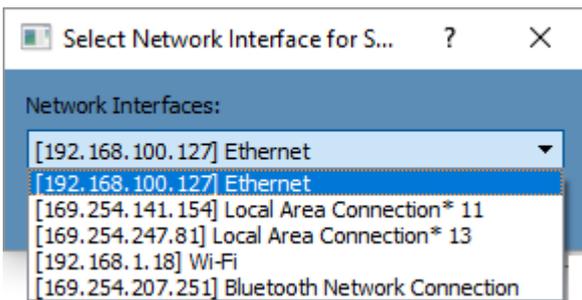


2. If the available device is scanned and found, the connection will be automatically established. After the connection is successfully established, the **Connect Status** will show **“Connected”** (will display **Not Connected** if disconnected).

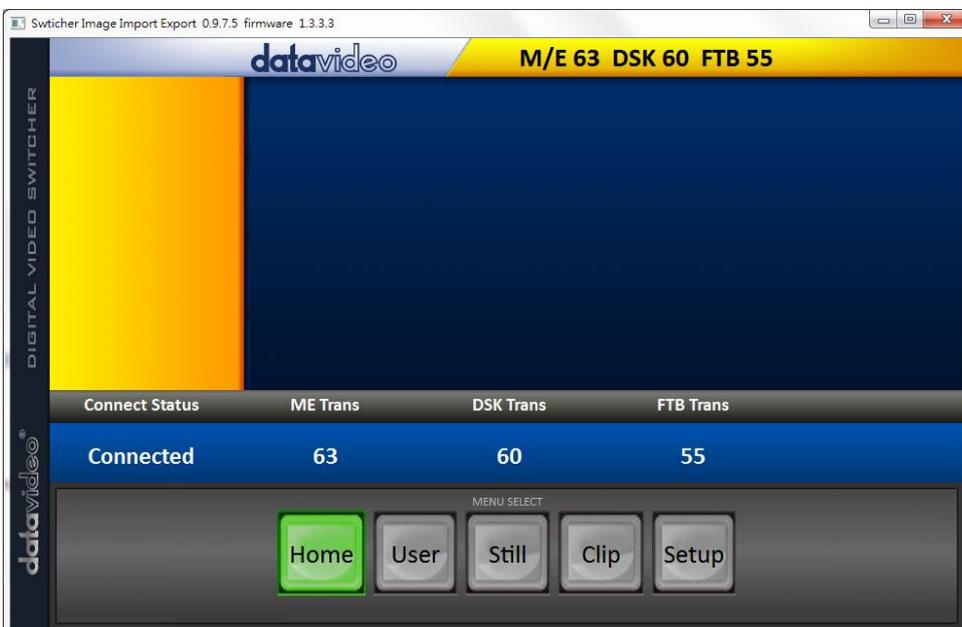

- After clicking the **Setup** button, the network information will be displayed in the blue area (identical to the SE-1200 MU user control interface).



- After clicking **Import-Export**, you will be able to see four options which are **Import Still**, **Import User**, **Import Clip** and **Export**.
- When in Import Still, click a Still number first and enter a location for storing the still. Then click Import Still again, the interface for selecting picture files will appear. If the selected picture is not 1920x1080 or 1280x720, the following interface will be displayed to allow you to crop or enlarge the picture.

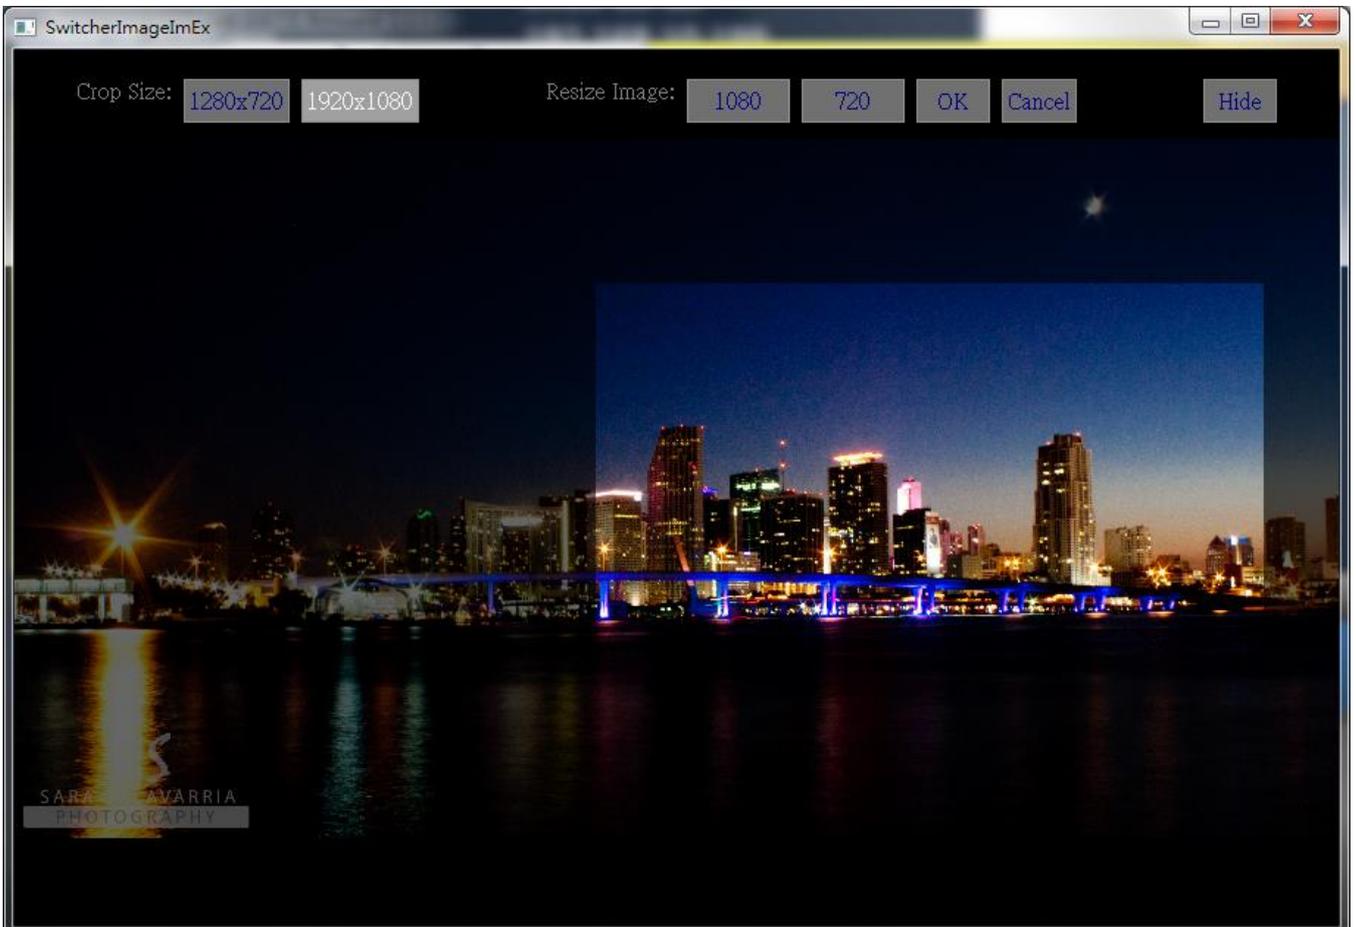

Crop Size: Select the right crop


Resize Image: You will be allowed to select two sizes, large (1080) or small (720), and zoom the picture to 1920 x 1080 or 1280 x 720.

OK: Confirm the setting and apply in the switcher.

Cancel: Cancel the selection

Hide: Hide the interface

6. After the right crop is selected or the resolution is correctly configured, the new settings will be automatically applied to the switcher. To confirm, click the **Still** button on the **MENU SELECT** pane to view the thumbnails.

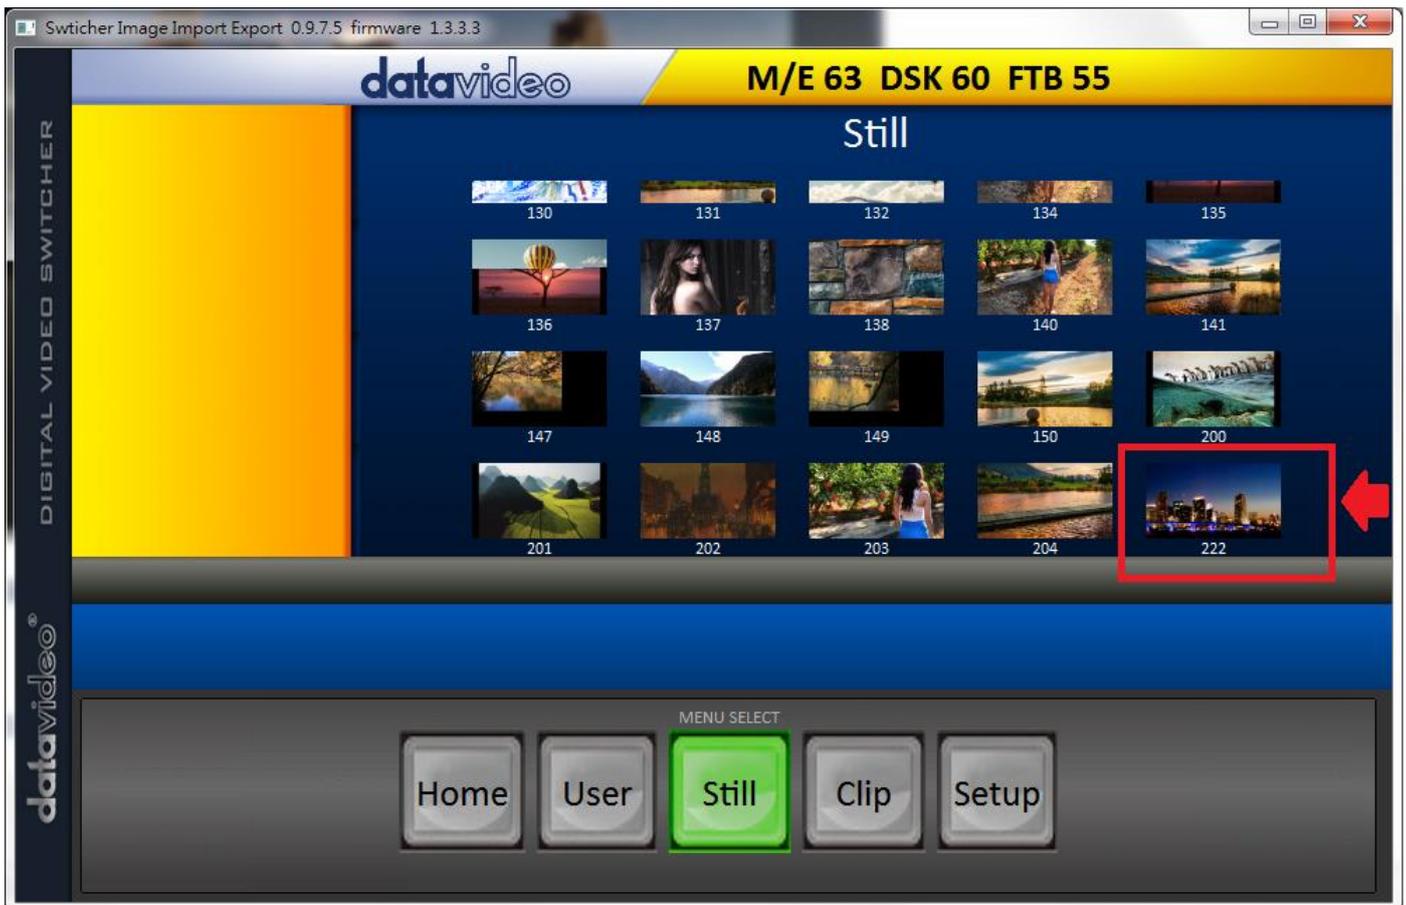

In addition to still picture import and export, the user is also allowed to import and export user memory slots to and from the PC. The **Import User** has the identical steps; select .mem file to import. The **Import Clip** allows the user to import the clip sequential files from the PC. The sequential files are numbered using the last five characters. Select one file and the system will automatically grab the file and the rest after that. The supported clip file formats are **BMP, JPG, PNG and PIC** and the optimal resolution is 1920 x 1080.

The software supports multiple languages which are English, Traditional Chinese and Simplified Chinese.

Note: The latest software version can be downloaded from the product page. To update the software, it is recommended to remove the existing program first. Click "**Start Menu > Programs > datavideo > tools > Uninstall**" to remove the program. If the program is not removed, the user will be prompted that the PC already contains the same program during the reinstallation process. Click "**Remove**" to remove **SwitcherImageImEx** from your computer.

Loading still images

The HS-1300 allows the user to load still images saved on the machine to the Multiview screen. Please follow the steps outlined below to load the still picture.

1. Press the **MENU** button to open the OSD menu on the Multiview display.
2. Open the **Stills** menu option as shown below.

Stills	Load Still	Load	Still Num 10	Still 1
		Thumbnail Picture - 1	Thumbnail Picture	Thumbnail Picture + 1
	Save Still	Save	Still 1	Still Num 10
	Grab Still	Grab	Still 1	
	Freeze	1 Live	2 Live	3 Live
		4 Live		

3. In the **Load Still** sub-option, first select the still picture that you would like to load (**Still Num**). The still picture preview is shown in the row right below the **Load Still** row.
4. Select **Load** to load the still picture to one of the following destinations:
 - Still 1
 - Still 2
 - Input 4
 - Input 3
 - Input 2
 - Input 1

6.2 Stinger Transition Effect

The Stinger Transition Effect is basically an animated effect added during transition of two video sources. The animated effect is generated by a clip file which consists of a series of sequential files in **bmp/jpg/png/pic** formats. In this section, you will be shown how you can load the existing clip on the switcher, and import the clip to the switcher from the PC.

Loading the existing Clip for Stinger Transition Effect

The HS-1300 allows you to generate the stinger transition effect. To do this, the user should first load the clip saved on the machine to the **CH6 window** of the Multiview screen first. Please follow the steps outlined below to load the clip.

1. Press the **MENU** button to open the OSD menu on the Multiview display.
2. Move to the **User Mem**s menu option as shown below.

User Mem	Load Mem	Memory 13	Load	
	Save Mem	Memory 13	Save	
	Load Clip	Load	Clip 0	
		Thumbnail Clip - 1	Thumbnail Clip	Thumbnail Clip + 1
		Clear Clip	Delete Clip	

3. In the **Load Clip** sub-option, first select the clip that you would like to load. The **Clip Preview** is shown in the row right below the Load Clip row.
4. Select **Load** to load the clip to the **CH6 window**. The load progress prompt “**Loading Clip XX/XX ...**” will appear. Once loaded, the previously displayed video or image will be replaced.

Note: The load process can take up to tens of seconds.

5. To enable the Clip or Stinger transition mode, please press the **MIX** and **WIPE** buttons at the same time.

Restoring CH6 window for Live or Still mode

If the Clip transition is no longer needed, you may free up the CH6 window for other modes of use such as Still and Live. Follow the steps outlined below to re-configure the CH6 source.

1. Press the **MENU** button to open the OSD menu on the Multiview display.
2. Open the **User Mems** sub menu as shown below.

User Mems	Load Mem	Memory 13	Load	
	Save Mem	Memory 13	Save	
	Load Clip	Load	Clip 0	
		Thumbnail Clip - 1	Thumbnail Clip	Thumbnail Clip + 1
		Clear Clip	Delete Clip	

3. Select **Delete Clip** to clear the clip buffer (CH6).
4. Exit the **User Mems** sub menu.
5. Enter the **Inputs** sub menu as shown below.

Inputs	Input 1	Black 0%	White 100%	Chrom 1.0
	Input 2	Black 0%	White 100%	Chrom 1.0
	Input 3	Black 0%	White 100%	Chrom 1.0
	Input 4	Black 0%	White 100%	Chrom 1.0
	Freeze	1 Still	2 Live	3 Still
		4 Still	5 Still	6 Live
	Crosspoint	1 Input 1	2 Input 2	3 Input 3
		4 Input 4	5 Input 5	6 Input 6


6. Move to the Freeze option and set CH6 to Live or Still.

Importing the Clip for Stinger Transition Effect from the PC

On the HS-1300, you will be able to add a clip between sources. Besides using the existing clips on the machine, you are also allowed to import your own clip (a series of **bmp/png/jpg/pic** files) to the HS-1300 from the PC using the **Switcher Image Import/Export utility**, which can be downloaded from the HS-1300 product page.

- First connect the HS-1300 to a Windows computer using an RJ-45 Ethernet cable.


- Since the HS-1300 has a default IP address of 192.168.100.101 so the computer should be given the IP settings that match the same IP range as the switcher.
- Turn on the Windows computer and manually set the IP to 192.168.100.X within the **Windows Network and Sharing Centre**.
- Now install the **Switcher Image Import/Export utility** on the computer.
- After the utility is installed, click and open the user interface as shown below.

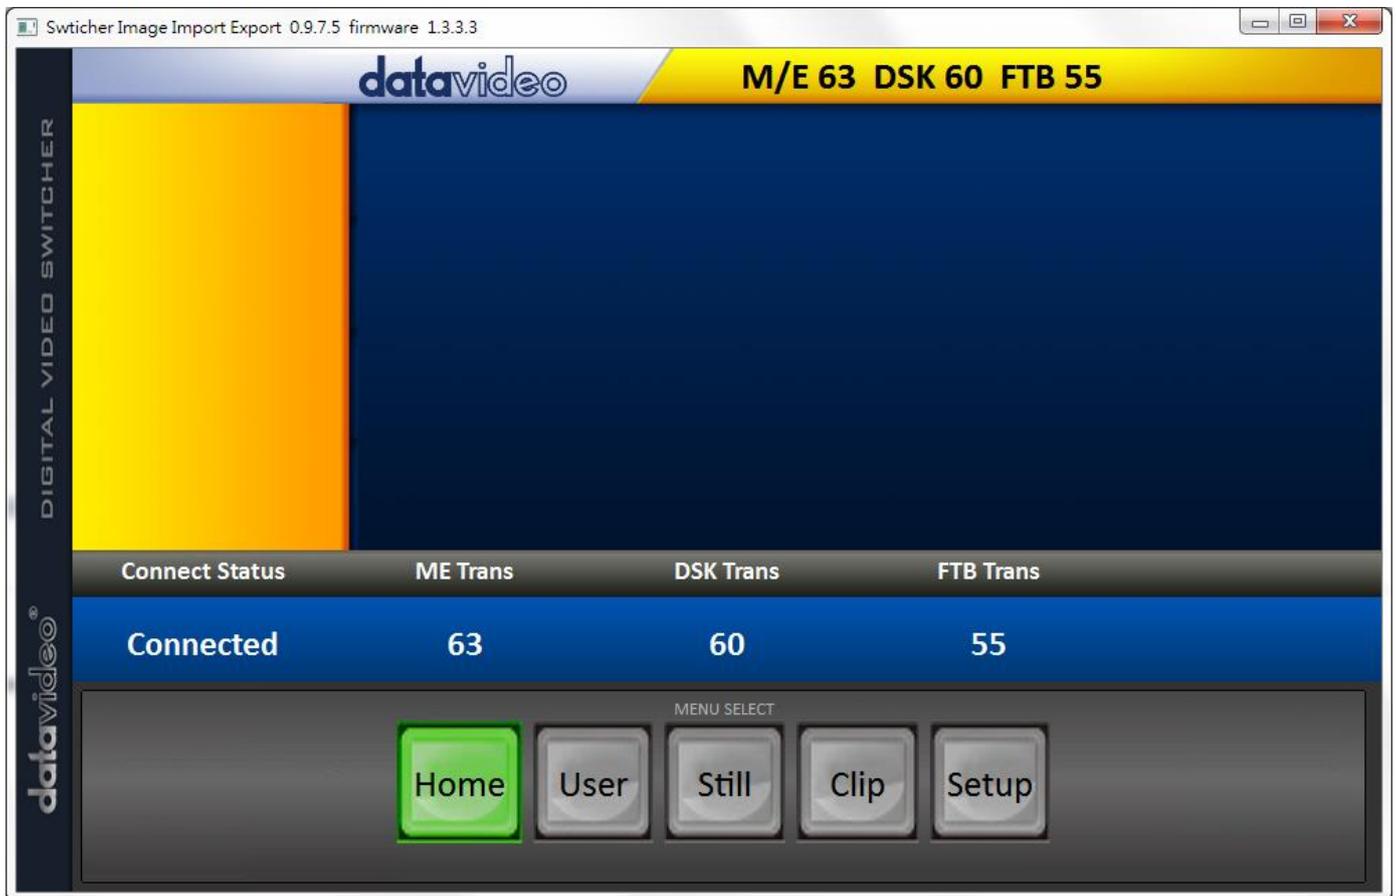

Click **Setup** on the **MENU SELECT** pane and if the connection between the HS-1300 and the PC has been successfully established, you will be able to see the network information of your switcher. Select **Import-Export** from the yellow menu options.




The clip number allows you to select a location where you can save the clip. To import a clip from the computer into the HS-1300, select **Import Clip**.

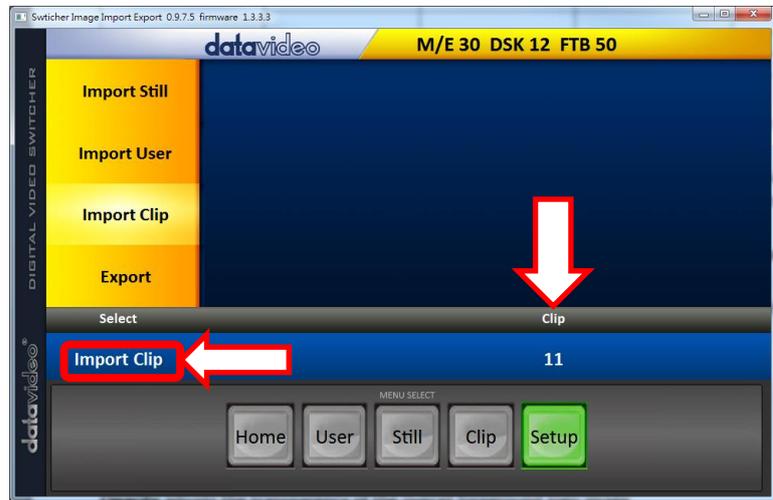


Note: The **Switcher Image Import/Export utility** does the conversion from bmp/png/jpg to the .pic file format. All you need is to give the utility a starting file location and it will give the utility an idea where to start linking all images up into a sequential animation file.

Importing Clips


Select **Import Clip** will open a file browser window. Browse to the directory where your clip files are saved and then select the file at the zeroth location, in our example on the right, the file name is **frame-000.png**.

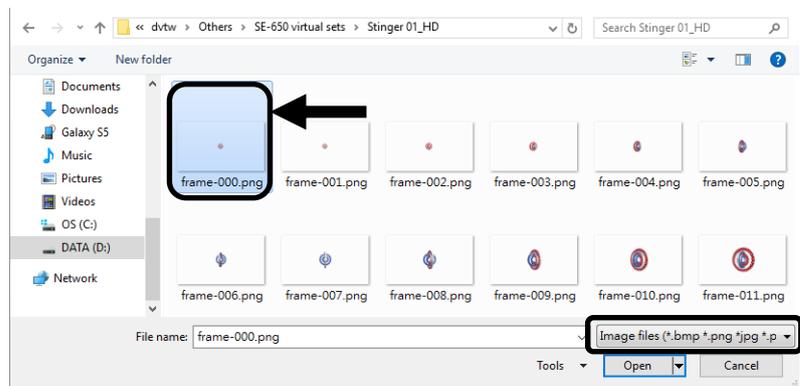

Click **Open** to start the clip import. If your files are not the .pic format, they will be automatically converted to .pic format by the **Switcher Image Import/Export utility** first.

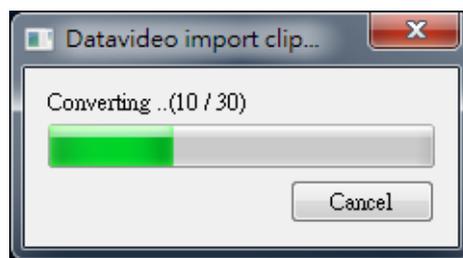

After the file conversion, the clip import will then start. After the import is complete, the progress dialog will be automatically closed.

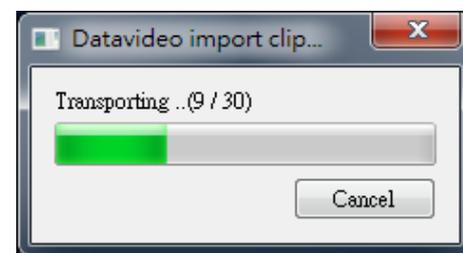

Note: Clip Conversion and Clip Import have progress dialogs that show progress & number of frames done. These dialogs also have a cancel button which allows the user to cancel the import at any stage. If the import is cancelled, then the partially imported data will be deleted.

How to Create the PNG Sequence for Stinger Transition Effect


Adobe After Effects is a motion graphics application that can be used for creating the clip file for stinger transition effect. After the clip file is created, there are two ways to convert the file to the PNG sequence format readable by the HS-1300 switcher in Adobe After Effects. In this section, we will show you how you can create the PNG sequence for the Stinger transition effect.

Adobe After Effects


1. Click **File** → **Export** → **Add to Render Queue** (or alternatively, you can also click **Composition** → **Add to Render Queue**).




2. The Render Queue will be displayed in the bottom pane.

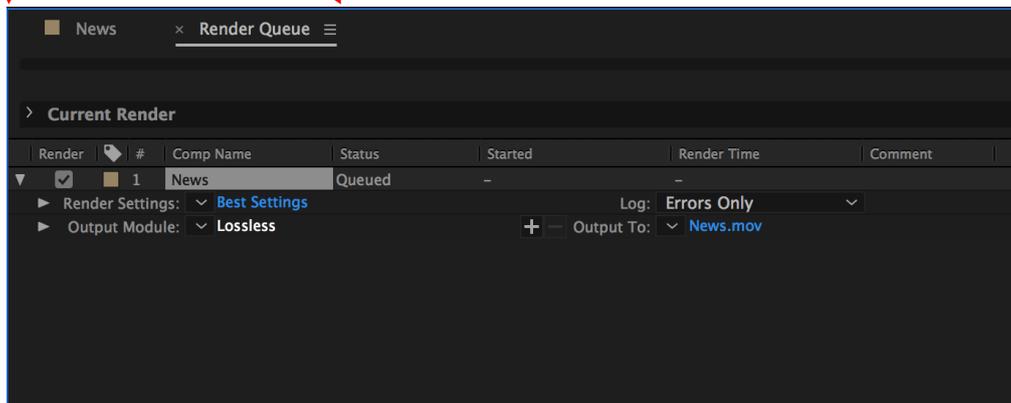


3. Click **Output Module** and on the **Main Options** window, click the **Format** dropdown list and select **PNG Sequence**.

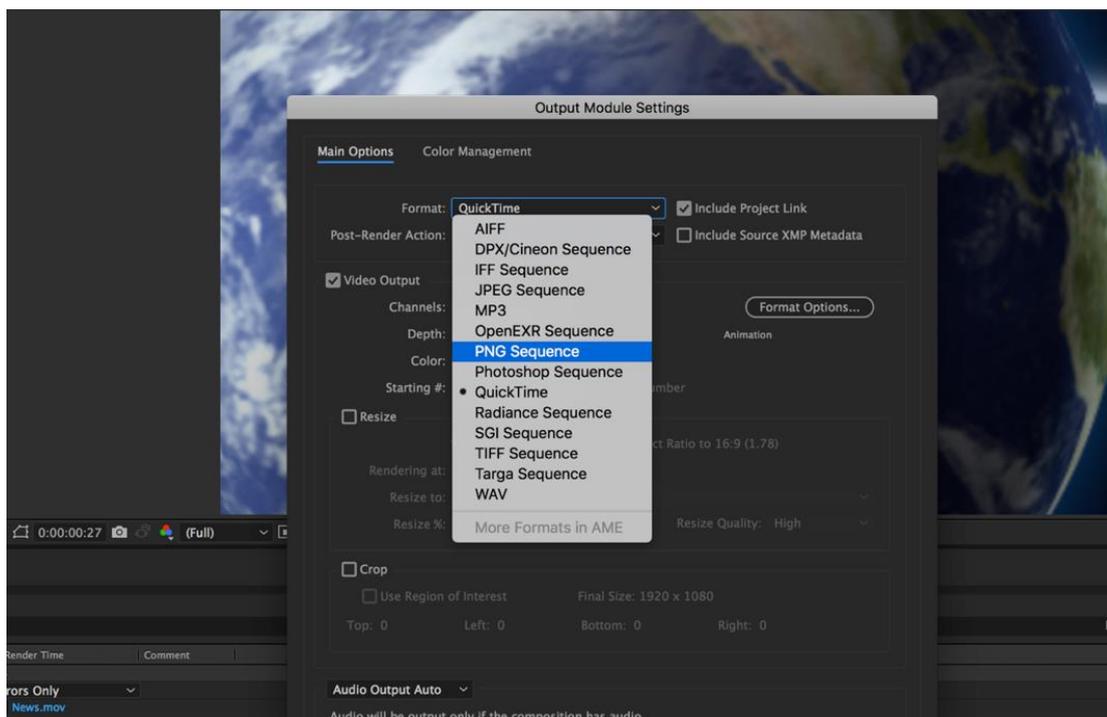

4. Click the **Channels** dropdown list and select the “**RGB + Alpha**” option.

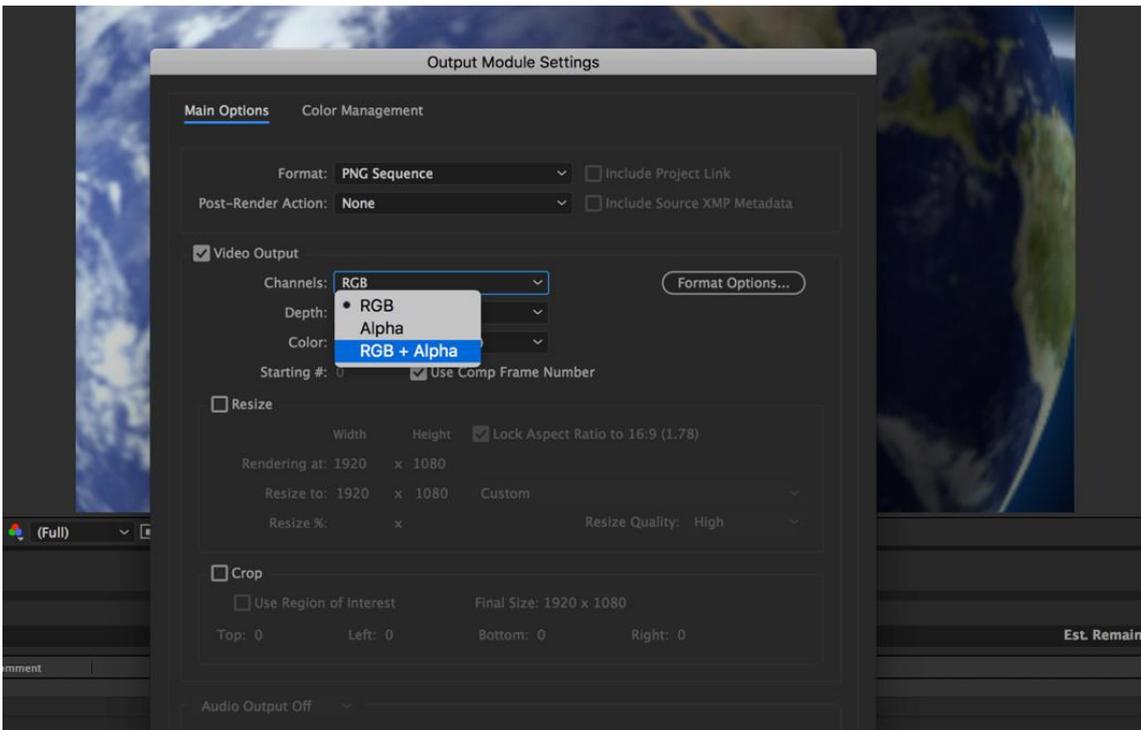

5. Click “**Output To**” and then change the location where your files are rendered. Click **Render** after that.

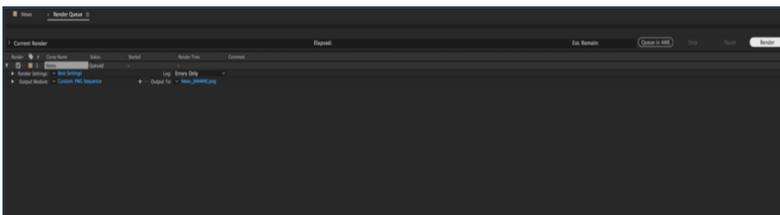



The next section outlines the file conversion procedure using the **Media Encoder CC**.

Media Encoder CC


1. Click **Composition** → **Add to Media Encoder Queue** (or alternatively, you can also click **File** → **Export** → **Add to Media Encoder Queue**).




2. Click blue fonts in **Format/Preset** fields to open the “**Export Settings**” window.

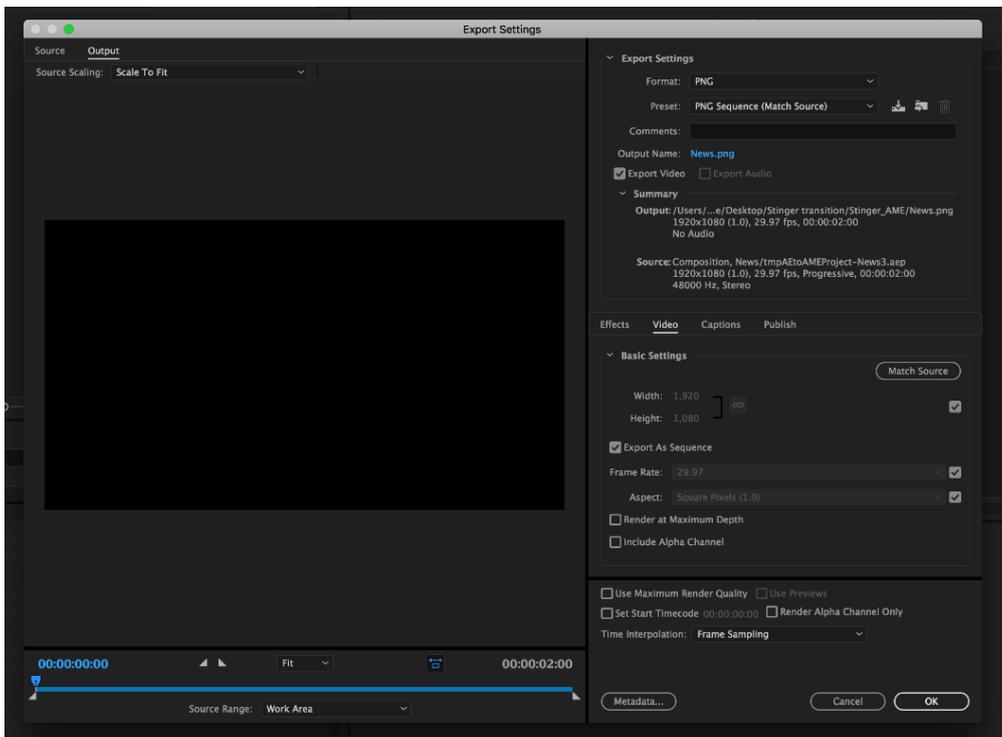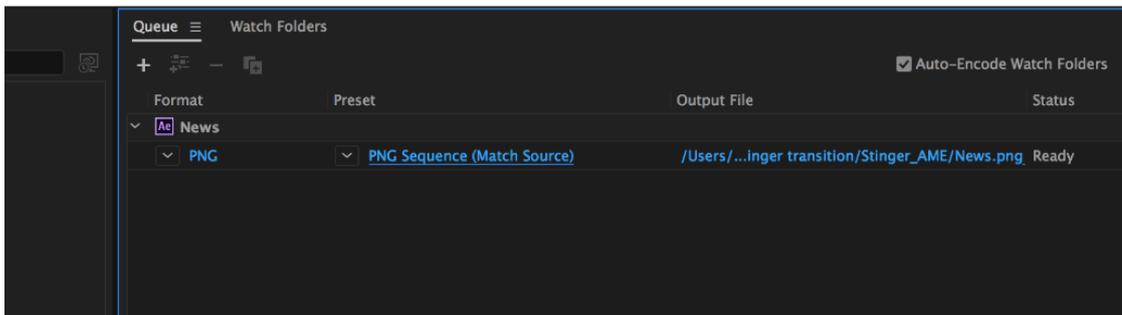


3. Click the **Format** dropdown list and then select **PNG**.

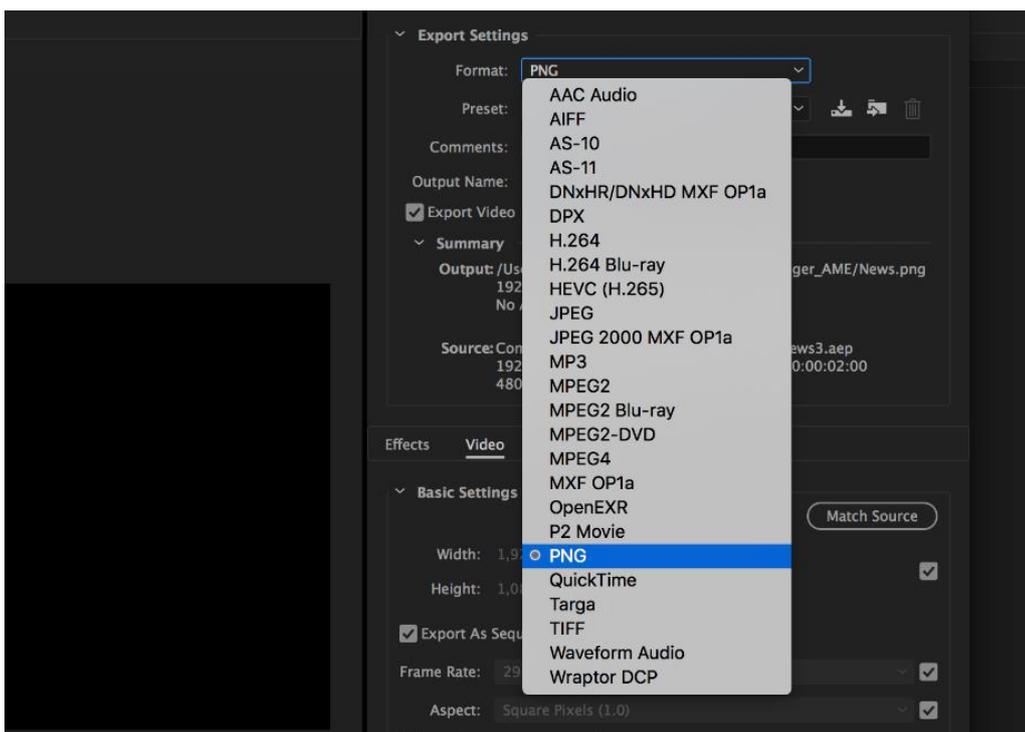


4. Click the **Preset** dropdown list and select “**PNG Sequence with Alpha.**”

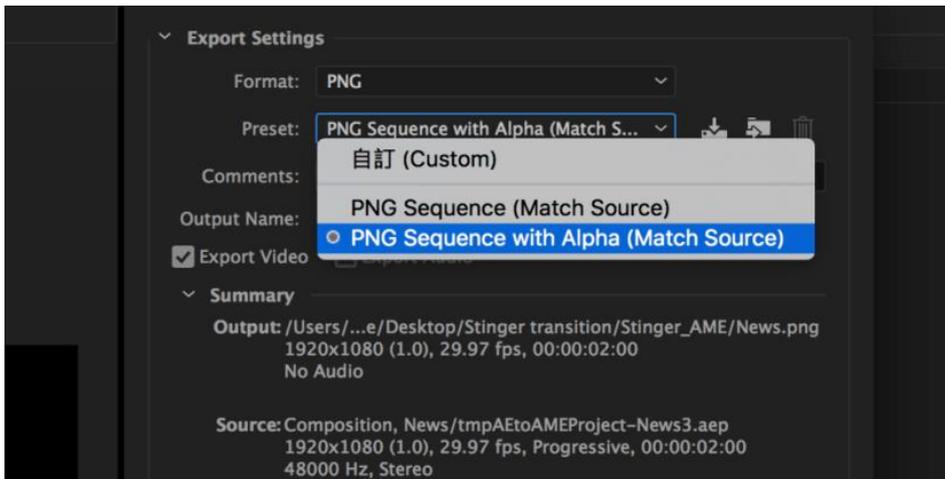


5. Make sure “**Export As Sequence**” and “**Include Alpha Channel**” are checked and then click **OK**.

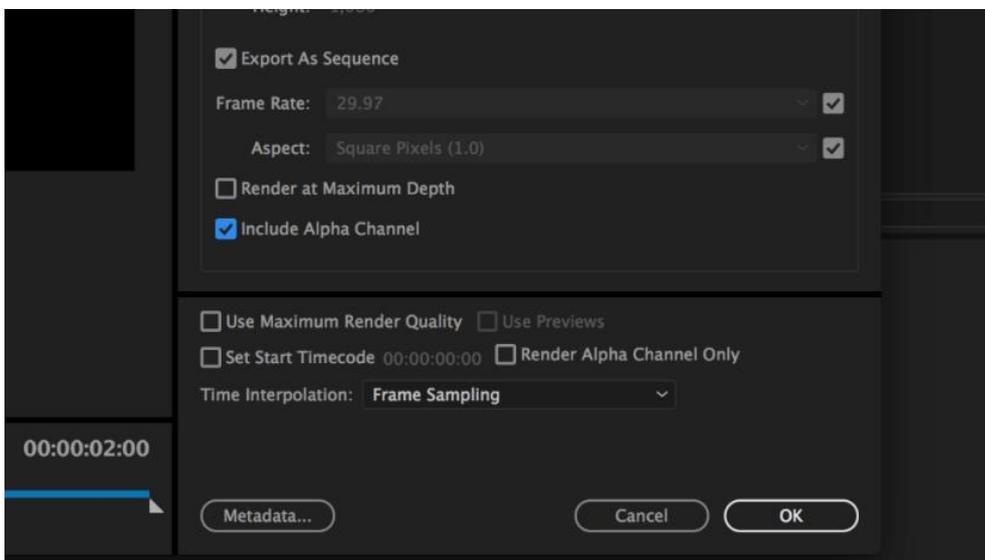

6. Select “**Output File**” to choose the render files destination. Click the green button to render.

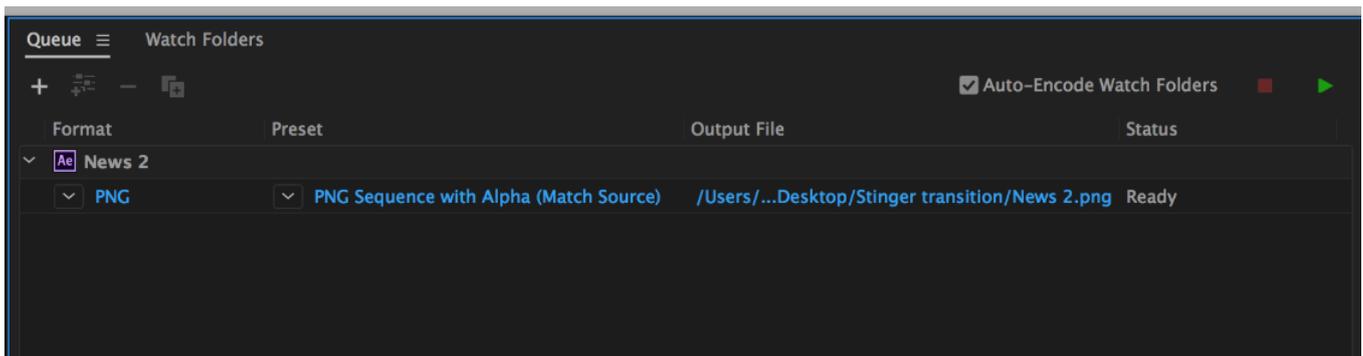

7. Once completed, the status will display “Done.”

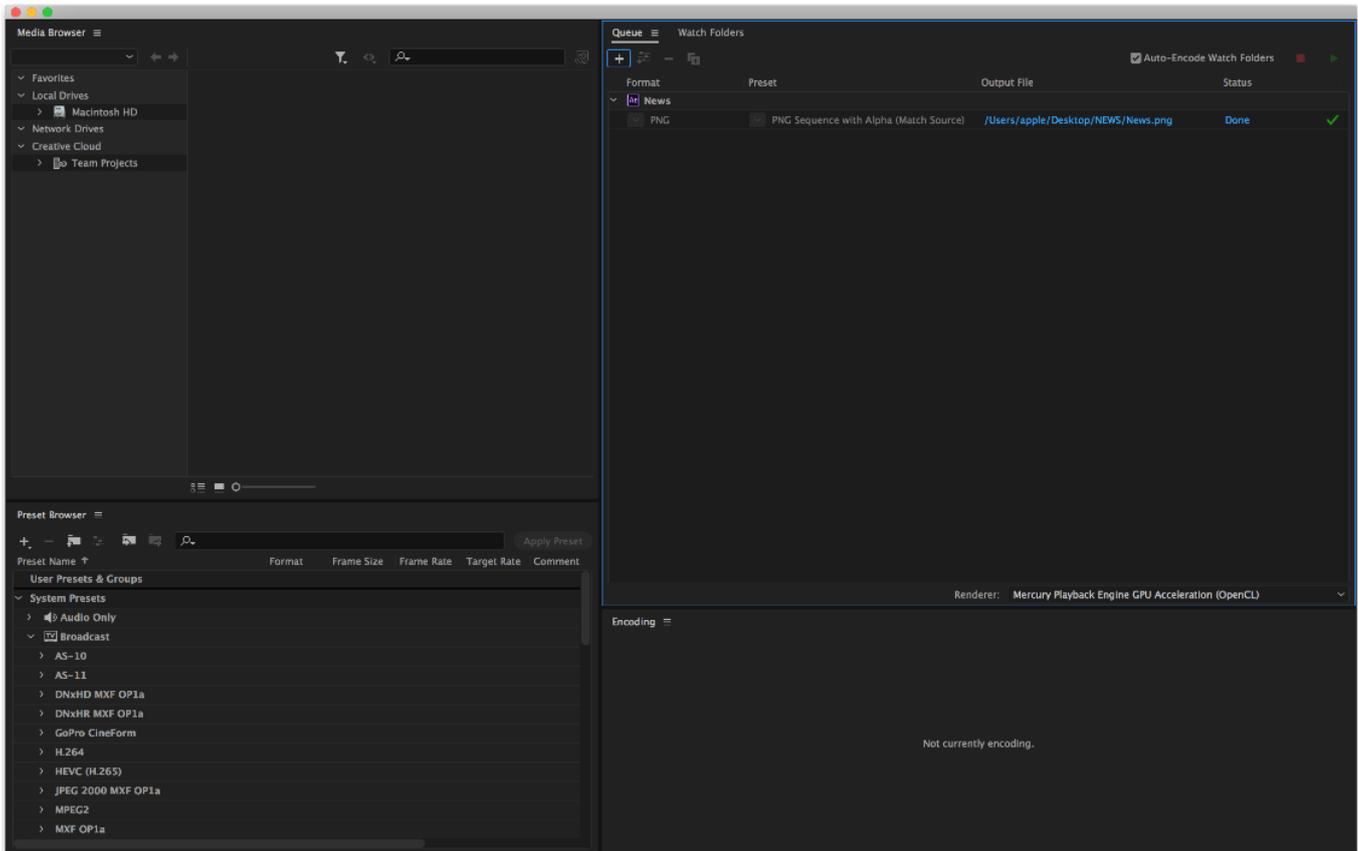

After the sequential files are created and ready, see section 5.4.2 to import the Clip file to the switcher.

Important things to note while creating Stinger Transition Effects

When using Datavideo’s HS-1300 Multi-Channel Switcher to design and create the Stinger Transition Effects, in addition to being creative, there are a few things that you need to take into account of.

1. Length limit of the stinger transition animation

The length of a good stinger transition animation should be approximately 0.5 to 2 seconds.

2. The HS-1300 allows a maximum of 200 image files in an animation sequence

The number of image files will determine the length of stinger transition time.

3. While designing the animation, it is best to have an image that fills up the entire frame to create a satisfactory visual effect (please see the images below).





6.3 Chromakeyer

Performing the configuration steps below will allow you to preview the keyer effect on the Multiview by simply pressing KEYER PGM or KEYER PVW buttons.

1. Set up studio equipment including lights and the backdrop (Green/Blue).
2. Press the "MENU" button to open the Keyer Setting Menu.

Keyer	Keyer	Chroma	Self	Priority	Top
	Keyer Ctrl	Lift 0%	Gain 1.0	Opac	100%
	Key Source	Input 1	Fill Black		
	CK Setup	CK Auto	Hue 140	Luma	101%
		K Range 160	K Fgnd 10%	K Bgnd	90%
		Hi-Light 0%	Lo-Light 0%	Bg-Supp	OFF
	Mask	Left 0%	Right 0%		
		Top 0%	Bot 0%		

3. Select “**Chroma**” and “**Split**” under the “**Keyer**” sub-option.
4. Select the camera signal to be chromakeyed under the “**Key Source**” sub-option.
5. Adjust the left, right, top and bottom values of the “**Mask**” sub-option to set the chroma key range based on the green or blue backdrop size.
6. CK Setup
 - Key Range defines a color range close to the color (blue/green) of the studio backdrop.
 - Key Foreground adjusts the opaqueness and transparency.
 - Key Background adjusts the chromakey performance to achieve perfect chromakeying.
 - Hi-Light and Lo-Light adjust luma value of the chroma key.
 - Bg-Supp removes foreground and background luma (brightness) from the final image.
7. Chroma Key setting is complete.

Remarks: The HS-1300 is equipped with auto chromakeying function so if after following the above steps, a clean chromakeying effect cannot be achieved, you may first use the CK Auto function under the CK Setup sub-option and then fine-tune other parameters to achieve perfect chromakeying.

6.4 Dual Chromakey

Dual-Chromakey is a function designed to allow you to apply chromakey effect to two camera images at the same time and overlay the results on Preview and Program displays.

Follow the steps below to set up the environment for dual chromakey.

1. Set up studio equipment including lights and the backdrop (Green).
2. Connect two cameras to switcher’s input 1 and 2. Note that the studio background must be green and the foreground can be a talent or an object. Connect background images to switcher’s input 3 and 4.



3. Press the “**MENU**” button to open the **Keyer** page as shown below:

Keyer	Keyer	Key 1		
	Keyer Ctrl	Chroma	P-in-P	Priority Bot
		Lift 0%	Gain 1.0	Opac 100%
	Key Source	Input 1	Fill Input 3	
	Mask	Left 0%	Right 0%	
		Top 0%	Bot 0%	

4. Select “**Key 1**” under the “**Keyer**” sub-option.
5. Select the camera image to be chromakeyed under the “**Key Source**” sub-option. In this example, the source is “**Input 1,**” which is **Channel 1.**
6. Adjust the left, right, top and bottom values of the “**Mask**” sub-option to set the chroma key range, which is the green backdrop size.

7. Open the **Chroma** page as shown below:

Chroma	Keyer	Key 1			
	Key Source	Input 5			
	CK Setup	CK Auto	Hue	120	Luma 100%
		KRange 170	K Fgnd	15%	K Bgnd 67%
		Hi-Light 0%	Lo-Light	0%	Bg-Supp On
	Mask	Left 0%	Right	0%	
		Top 0%	Bot	0%	


8. Adjust the following parameters under “**CK Setup.**”

- Key Range defines a color range close to the color (green) of the studio backdrop.
- Key Foreground adjusts the opaqueness and transparency.
- Key Background adjusts the chromakey performance to achieve perfect chromakeying.
- Hi-Light and Lo-Light adjust luma value of the chroma key.
- Bg-Supp removes foreground and background luma (brightness) from the final image.


9. Chroma Key setting is done.

10. Repeat steps 1 – 9 to configure **Key 2**, which is the image captured by camera 2.

11. After dual chromakey is configured, enable Channel 3 on the Program BUS and Channel 4 on the Preset BUS.

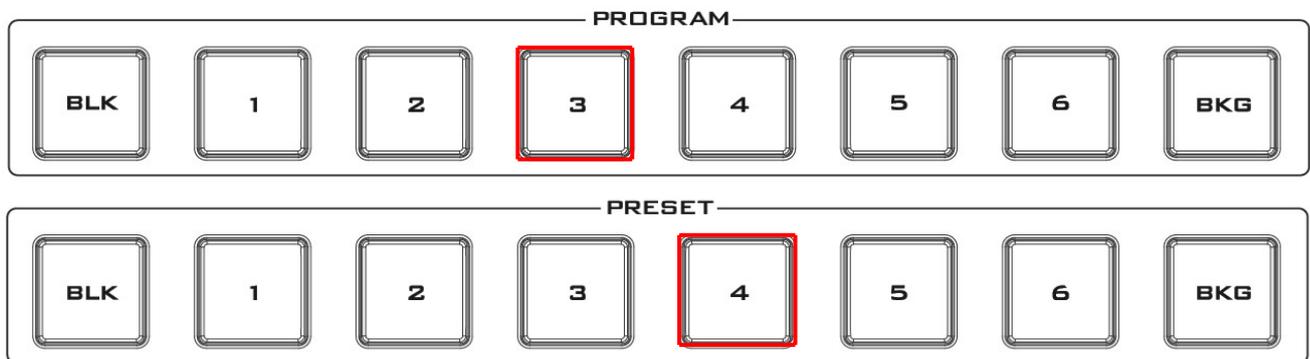

12. Press **Key 1 PGM** and **Key 2 PVW** buttons to enable views of Camera 1 and Camera 2 on Program and Preview display respectively. To trigger transition, simply move the **T-bar** manually or press the **AUTO** button.

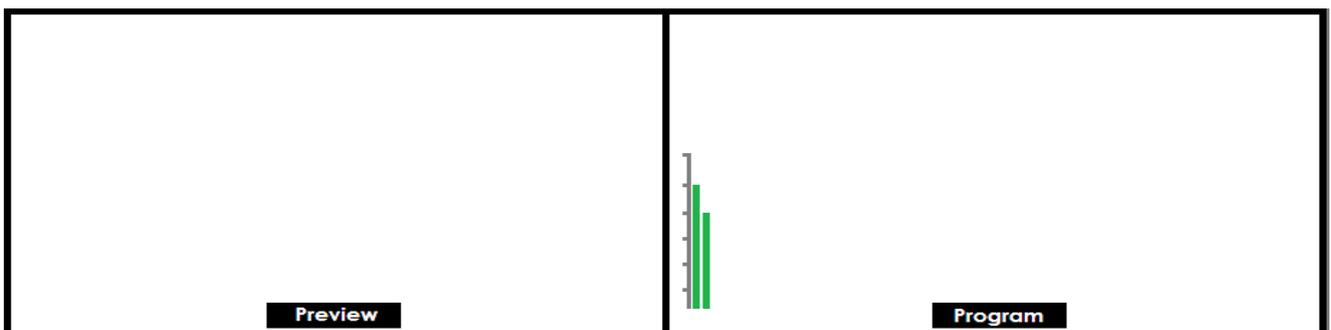


6.5 User Memory


The user memory allows the user to save the current switcher settings to different presets. You will be able to import/export these memory presets from/to the PC. In this section, we will show you how you can import and export these user memory presets step by step.

Export/Import User Memory Preset to/from the PC

1. On the **Switcher Image Import/Export** interface, click **Import-Export**.

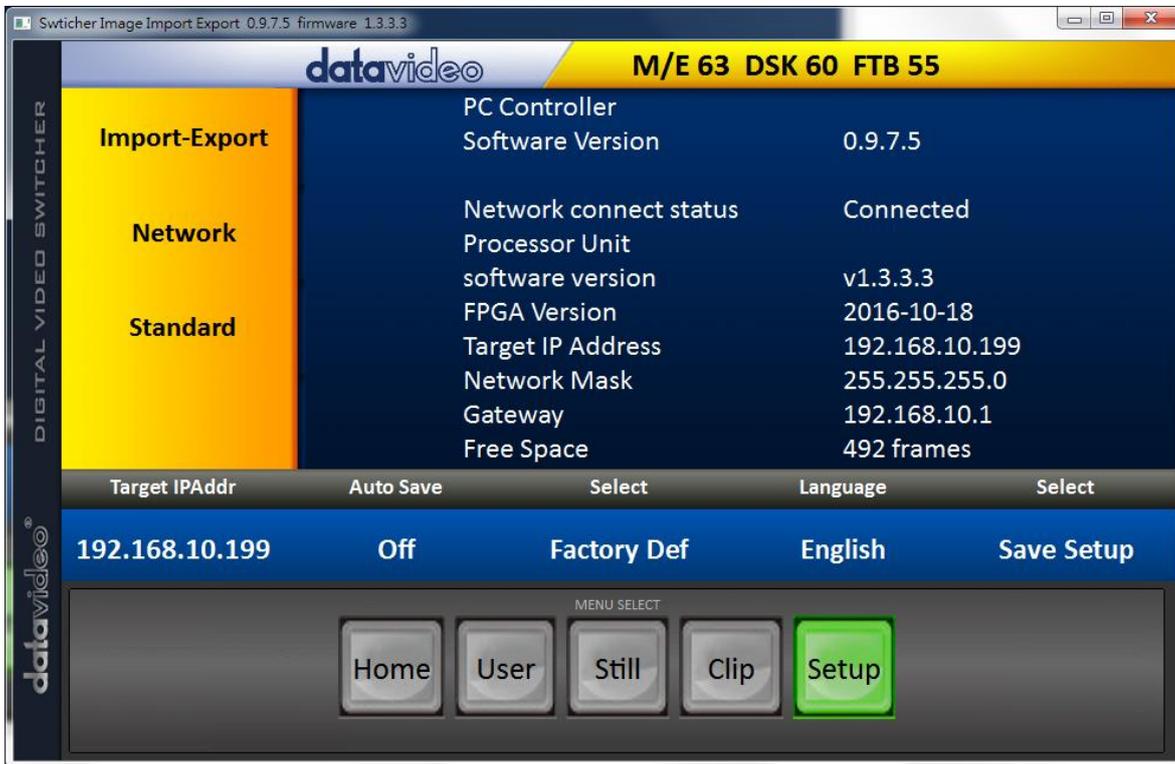


2. After entering the **Import-Export** option, first select a preset number in the **User** option and then click **Import User.**

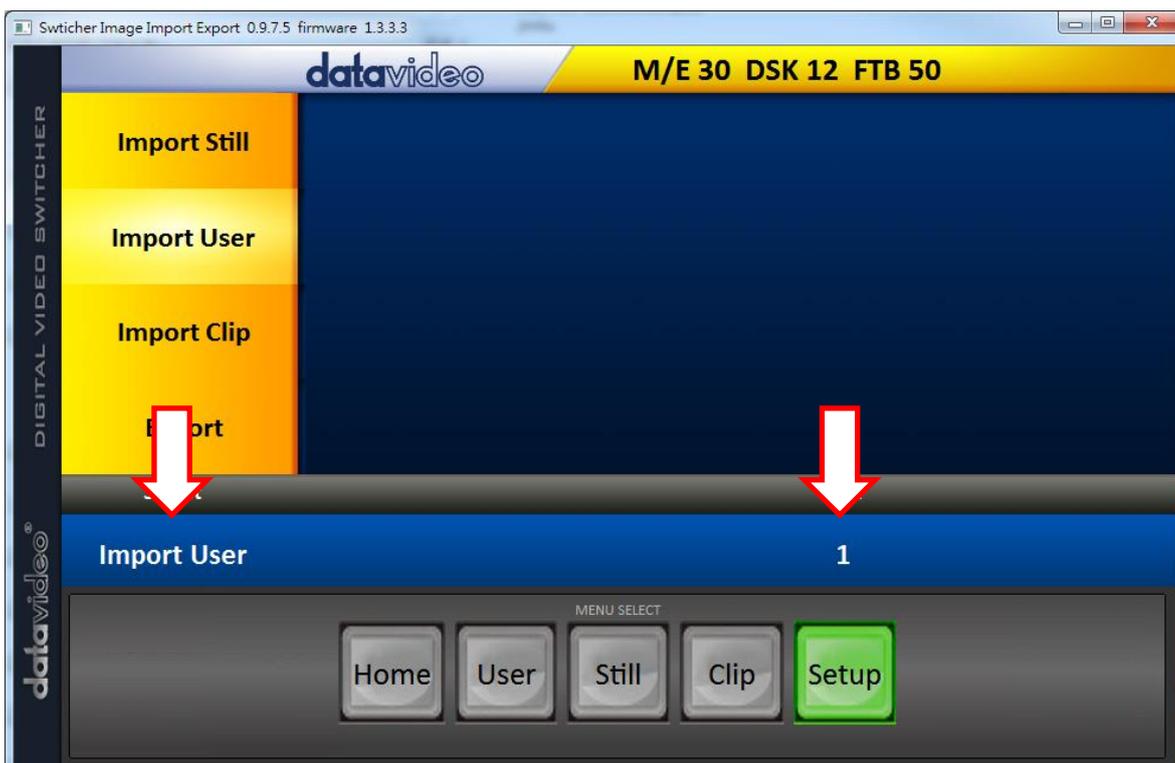

3. As soon as “**Import User**” is clicked, the PC hard disk browser window will open; select a .mem file to import a user settings file.

4. To export, simply click “**Export**” and the following window will open; select a preset number to export the user settings to the PC in .mem file. Click “**Export User**” to open the file browser window.

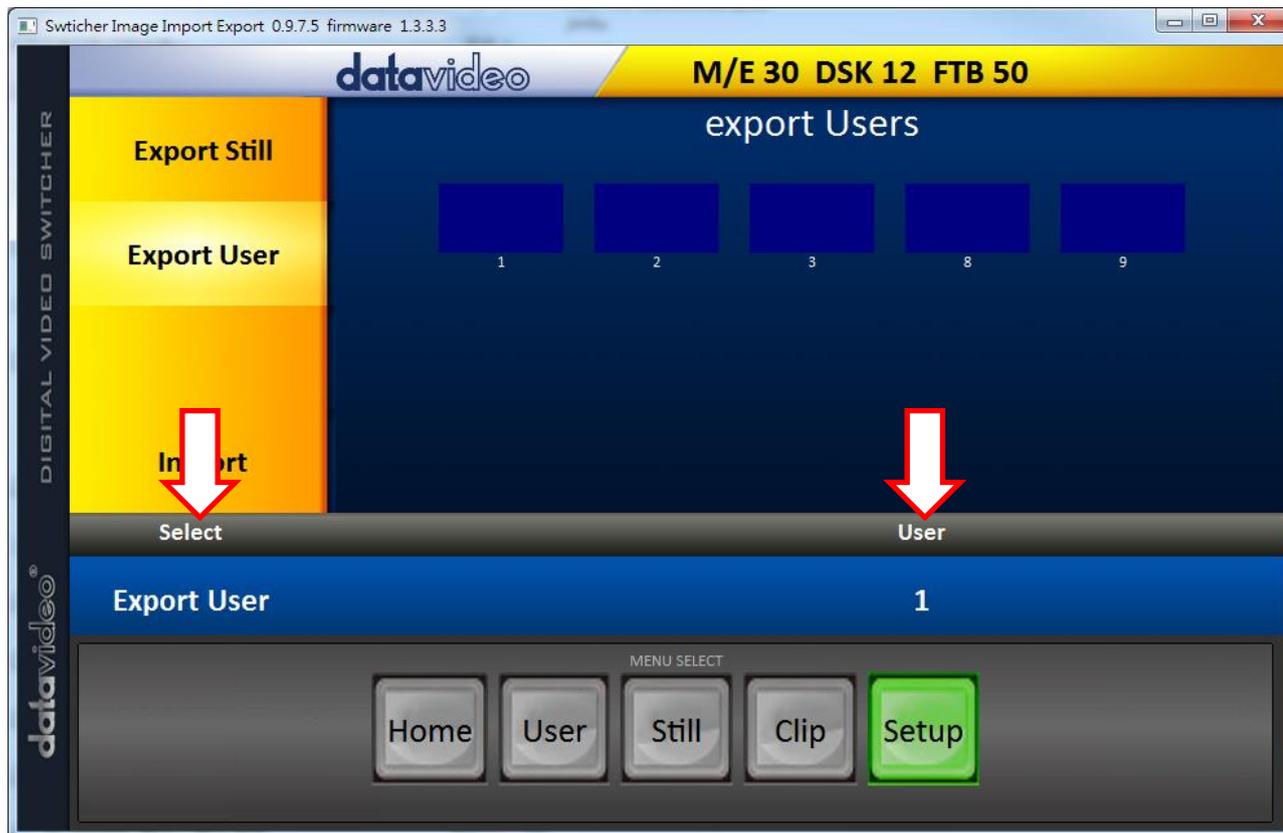

5. On the PC hard disk browser window, select a directory in which the .mem file can be saved.

Loading User Memory Preset

The HS-1300 allows the user to load user memory presets saved on the machine to the Multiview screen. Please follow the steps outlined below to load the user memory preset.

1. Press the **MENU** button to open the OSD menu on the Multiview display.
2. Open the **User Mem**s menu option as shown below.

User Mem s	Load Mem	Memory 13	Load	
	Save Mem	Memory 13	Save	
	Load Clip	Load	Clip 0	
		Thumbnail Picture - 1	Thumbnail Picture	Thumbnail Picture + 1

3. In the **Load Mem** sub-option, first select the **Memory Preset** that you would like to load (**Memory**).
4. Select **Load** to load the preset settings to the machine.

Chapter 7 Monitor OSD MENU Options



The HS-1300 Monitor can be configured via an on screen menu. When the **MENU** button is pressed the Main Menu list is displayed on the monitor.

This section covers the Menu options in the order that they appear on the monitor. These settings may also appear in more detail elsewhere in this instruction manual. Options may vary depending on the firmware version in use.

Once the chosen setting has been confirmed with the **ENTER** button, it is stored within the switcher's non-volatile memory.

Main Options	Sub Options	Parameters	Parameters
MAIN ADJUST	BRIGHTNESS	0~100	
	CONTRAST	0~100	
	SHARPNESS	0~100	
	SATURATION	0~100	
	TINT	0~100	
	BACK LIGHT	0~100	
	NR	HIGH / MID / LOW / OFF	
	MPEG NR	HIGH / LOW / OFF	
	VOLUME	0~100	
	EXIT		
COLOR	6500		
	9300		
	7500		
	USER COLOR	RED	0~100
		GREEN	0~100
		BLUE	0~100
EXIT			
SCAN SETTING	UNDER SCAN	full image	
	OVER SCAN	cropped image	
INFORMATION	H. FREQUENCY		
	V. FREQUENCY		
	RESOLUTION		
	VER.		
LANGUAGE	English [default]		
	Francis		
	Deutsch		
	Español		
	Italiano		
	Dutch		
	Português		
	Russian		
EXIT			
SPECIAL FUNCTION	OSD TIMOUT	5-120 SEC	
	FRAME RATIO	80 / 90 / OFF	
	4:3 MARK LINE	ON / OFF	
	CENTRAL MARK	ON / OFF	
	CINEMA ZONE MARK	ON / OFF	
	EXIT		
FACTORY RESET			
EXIT			

7.1 Main Adjust

The first menu option is the **MAIN ADJUST**.

To access the MAIN ADJUST sub-menu, press enter and the Brightness sub-option will be highlighted.

To adjust **BRIGHTNESS** press Enter again. Use the Up / Down buttons to change the setting and then press Enter to store the new value and return to the main menu.

Use the Up / Down buttons to select a different setting (Brightness, Contrast, Saturation, Sharpness, TINT and etc). Follow the same procedure to set other values.

7.2 Color

Press the MENU button to access the menu and use the Up / Down buttons to move to the **COLOR** option so that it is highlighted. Press the **ENTER** button to open the COLOR sub-menu.

To access the selected color setting, press **ENTER** again.

Use the Up / Down buttons to navigate the available color settings.

You can choose:

- 7500
- 9300
- 6500
- USER COLOR

7.3 Information

The **System Information** Menu displays Horizontal Frequency, Vertical Frequency, Resolution and the monitor's version of firmware.

Once selected, the information will be displayed as follows:

You will see:

H. FREQUENCY	33.7KHZ
V. FREQUENCY	60.0HZ
RESOLUTION	1920X1080I
VER.	0.11

7.4 Special Function

The Special Function Sub-Menu has settings for the **OSD TIMEOUT**, **Frame Ratio**, **4:3 MARK LINE**, **Central Mark**, and **Cinema Zone Mark**.

To access the selected setting press the **ENTER** button.

Use the Up / Down buttons to navigate the available options.

You can choose:

OSD TIMEOUT	5-120 SEC
FRAME RATIO	90 / 80 / OFF
4:3 MARK LINE	ON / OFF
CENTRAL MARK	ON / OFF
CINEMA ZONE MARK	ON / OFF

7.5 Factory Reset

The monitor menu offers a Factory Reset option, which will return all the settings of the monitor to the factory defaults

To reset the monitor press the MENU button and then use the UP / Down button to navigate to **FACTORY RESET** option. Press **ENTER** again to reset the monitor. After a few seconds the monitor will be reset.

Appendices

Appendix 1: Firmware Update Procedure

From time to time Datavideo may release new firmware to either add new features or to fix reported bugs in the current HS-1300 firmware as well as the video streaming server. Customers can update the firmware themselves if they wish or they can contact their local dealer or reseller for assistance should they prefer this method.

This section describes the firmware update processes for the switcher as well as the video streaming server and each should take *approximately few minutes to complete*.

Switcher

A working HS-1300 requires the following:

- The latest firmware update for the **HS-1300** (Download from the product page or request from your local Datavideo office or dealer).
- HS-1300 x 1
- 12V Power adapter x 1
- USB thumb drive x 1 (FAT32 format is recommended)
- USB A connector cable x 1

Once started *the update process should not be interrupted in any way* as this could result in a non-responsive unit.

1. Locate the FW Upgrade USB port on the front panel of the HS-1300.

**SWITCHER
F/W UPGRADE**



2. Insert the USB stick containing the latest firmware to the FW upgrade port.
3. Power on the device and the device should automatically detect the connected USB storage device.
4. Press the **“MENU”** button on the control panel to open the menu on the monitor screen.
5. Press the **“down arrow”** button to scroll to the **“Setup”** Option.
6. Press the **“ENTER”** button to enter the **“Setup”** menu.
7. Press the **“down arrow”** button to scroll to **“Software”** and then press the **“ENTER”** button to select the **“Software”** option.
8. As soon as **“Software”** is selected, you will be prompted whether to start the Software Upgrade. Select **YES** if you would like to start the software upgrade.
9. Reboot the device after the upgrade process is complete.


Video Streaming Server

You should first visit the official product page <https://www.datavideo.com/tw/product/HS-1300> where you can download the latest firmware file. Then follow the steps outlined below to update the device firmware.

1. Login the NVS-31 web interface, then click the **System** tab to open the system configuration page.
2. Scroll down to **Firmware Update** then click the **Browse** button to search for the latest firmware file on the PC's hard disk.




3. After double clicking the firmware file, you will see the loading prompt as shown below, indicating that the file is being uploaded to the NVS-31.

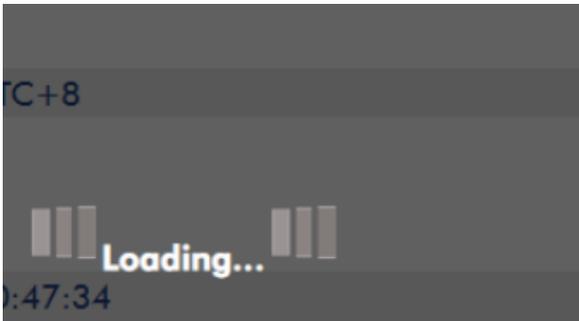

4. After the file has been successfully uploaded, you will see a file upload success message. Click the **Update** button to start the firmware update process.



5. The device will reboot itself after it is updated successfully.

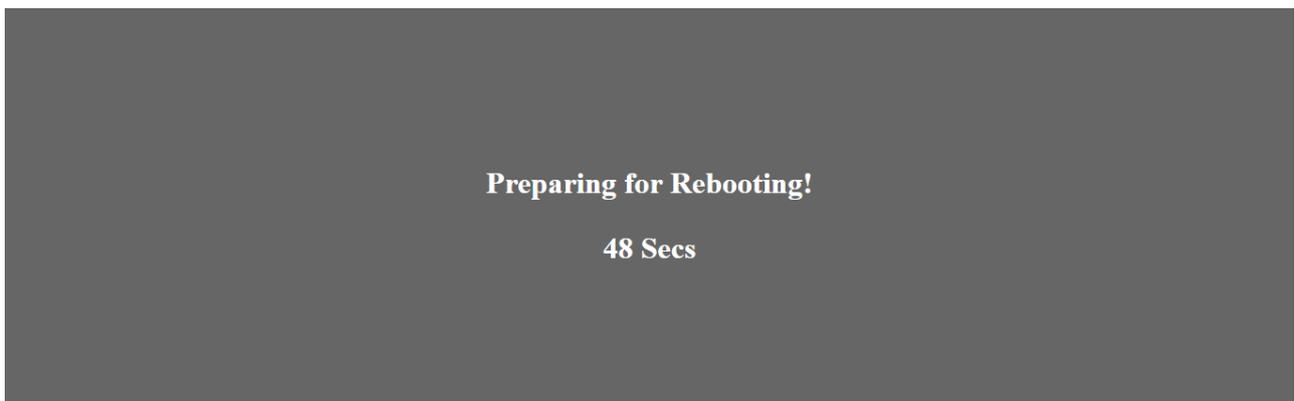

Note: If the device is recording or streaming, you must turn them off before initiating the firmware update.

Recovery Mode


If power outage is experienced while the firmware is being updated and the NVS-31 becomes inaccessible due to incomplete update or corrupt files, you may reboot the HS-1300 then activate the recovery mode to restore the device functionality. Follow the steps below to enter the recovery mode.

- Reboot the HS-1300
- As the HS-1300 boots, the **STREAM** button turns solid red then press and hold the **RECORD** and **STREAM** buttons simultaneously; release them when the two buttons start flashing red color.
- The NVS-31 starts erasing files of the previous update and uses the previously uploaded file to force the firmware update.
- When the **RECORD** and **STREAM** buttons turn solid white, the firmware update is complete.

Formatting the SD Card

You are also allowed to format the SD card on the HS-1300. Follow the steps below to format your SD card.

- Insert the SD card into the HS-1300's SD card slot.
- Login the NVS-31 web interface then click the **Storage** tab to open the storage interface.
- Select the disk storage format from the **Storage Format** drop-down list.

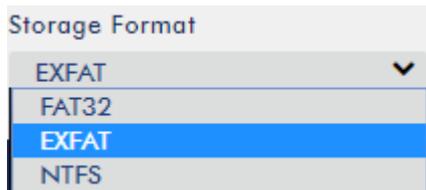

- Click the **Format Storage Disk** button to start SD card formatting. The format is complete when the progress bar reaches 100%.



Appendix 2: Recommended SD Cards

You should only use Class 10 SD card or above. In this appendix, you will find a list of SD cards recommended by Datavideo.

Recommended SD Cards			
No.	Brand	Model	Pictures
1	Kingston	SDHC I C10 16G	
2	SANDISK Extreme	SDXC I C10 U3 V30 64GB	
3	SONY	SDXC I C10 U1 64GB	
4	SANDISK Extreme PRO	SDXC I C10 U3 128GB	 
5	SONY	SDXC I C10 U3 64GB	
6	TOSHIBA	SDHC C10 16GB	

7	SANDISK Extreme	SDHC C10 16GB	
8	ADATA Premier Pro	microSDXC I UHS-I U3 Class 10 with SD adapter 64GB	
9	SANDISK ULTRA®	SDHC™/SDXC™ UHS-I 128 GB	

Compatible SD Card for Mobile Cast and NVS-33

1. **Kingston**
SDHC C10
16GB



6. **TOSHIBA**
SDHC C10
16GB



2. **SANDISK Extreme**
SDXC C10 U3 V30
64GB



7. **SANDISK Extreme**
SDHC C10
16GB



3. **SONY**
SDXC C10 U1
64GB



8. **ADATA Premier Pro**
microSDXC UHS-I U3 Class 10
64GB



4. **SANDISK Extreme PRO**
SDXC C10 U3
128GB



9. **SANDISK**
ULTRA SDHC
SDXC UHS-I
128GB




5. **SONY**
SDXC C10 U3
64GB



Appendix 3: GPI Connection

The HS-1300 can control external recorder/playback devices via simple contact closure GPI switch.


The GPI interface is a 3.5mm Jack Socket which is situated on the rear panel of the HS-1300. Contact closure between the Outer and Inner contacts on the jack plug will trigger a user selected event. Power is supplied by the HS-1300 and is less than 5V DC.

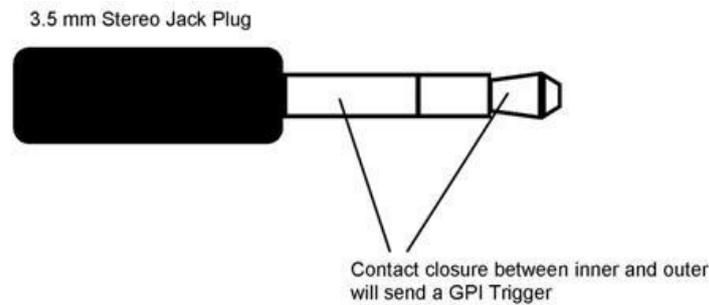

This GPI socket can also be used as a socket to trigger record or playback events with other equipment such as the Datavideo HDR-70 recorder.

SAFETY FIRST The cabling required needs to be designed specifically to connect the HS-1300 to the chosen record or playback device as they are not all the same. The cabling required can be made by yourself or a competent technician. Please speak with your Dealer or local Datavideo office to get further help and advice.

Appendix 4: Tally Outputs

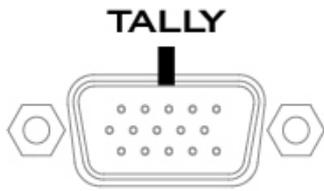


The HS-1300 has a D-sub 15 pin female tally output port. These connections provide bi-colour tally information to a number of other Datavideo products, such as the ITC-100 eight channel talkback system and the TLM range of LCD Monitors.

The ports are open collector ports and as such do not provide power to tally light circuits.

The pin outputs are defined as follows:

PIN No.	Signal Name	Input/Output	Description of Signal
1	Program 1	Open collector output	Tally output of input video Program 1
2	Program 5	Open collector output	Tally output of input video Program 5
3	Preview 1	Open collector output	Tally output of input video Preview 1
4	RCOM (GND)	Ground	Ground
5	Program 4	Open collector output	Tally output of input video Program 4
6	Program 2	Open collector output	Tally output of input video Program 2
7	Program 6	Open collector output	Tally output of input video Program 6
8	Preview 2	Open collector output	Tally output of input video Preview 2
9	GND	Ground	Ground
10	Preview 5	Open collector output	Tally output of input video Preview 5
11	Program 3	Open collector output	Tally output of input video Program 3
12	Preview 6	Open collector output	Tally output of input video Preview 6
13	Preview 3	Open collector output	Tally output of input video Preview 3
14	YCOM (GND)	Ground	Ground
15	Preview 4	Open collector output	Tally output of input video Preview 4

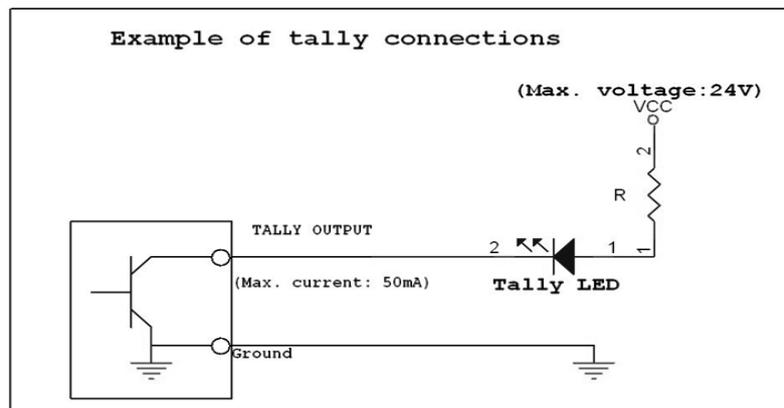




Appendix 5: Frequently-Asked Questions

This section describes problems that you may encounter while using HS-1300. If you have any questions, please refer to related sections and follow all suggested solutions. If problem still exists, please contact your distributor or the service center.

No.	Problems	Solutions
1.	What is the maximum bit rate of the HS-1300?	Depending on the purpose of use, the device's maximum bit rate varies: Record-Only: 16 Mbps Stream-Only: 10 Mbps Stream and Record: sum of the two video bitrates should not exceed 12Mbps
2.	What SD card classes do you recommend?	Please use SD Card Classes C10/U1/V10.
3.	a. I've recorded video on SD Card Class C10 but I am still seeing delay?	a. This could be due to unoptimized disk formatting. Format your disk on the NVS-31 or using the tool downloaded from the SD association's official website (https://www.sdcard.org/cht/downloads/formatter_4/index.html).
	b. In this case, why doesn't the system issue any error messages as soon as video recording is started?	b. The system only detects and sets write speed upon start of video recording. The system will not issue an error message if insufficient write speed is experienced while video recording is in progress.
4.	Why am I seeing blurry images while the video is being streamed over the RTSP protocol?	1. The maximum streaming resolution offered on the NVS-31 is 1080p60 so try viewing the streamed video on another computer. 2. Change your video source to 1080i (the switcher output) and lower the bitrate. 3. This could be due to insufficient network capacity. Use a Gigabit switch or router.
5.	The recorded video file cannot be played if recording is stopped due to system crash or power failure.	This is the limitation of MP4 files, which cannot be played as long as the recording is stopped incorrectly. It is recommended to use other video formats to record or repair the file using certain software tools.
6.	How to retrieve the device IP if I do not remember the network settings or the network settings are lost?	If you do not remember the IP address assigned to the device, follow the steps below to reset the network settings: <ul style="list-style-type: none"> • Turn off the machine. • Press the RECORD and STREAM buttons simultaneously and switch ON the device. • Wait for 5 seconds approximately and release the button push as soon as the two buttons light up. • The default IP address is 192.168.1.60.

7	How to remove the clip stored in the CH6 buffer after the Clip transition is disabled?	You should first clear the clip buffer using the Delete Clip option in the User Mem sub menu, and then set CH6 to live or still in the Inputs sub menu.
8	A few important things to note about operating the NVS-31.	<p>Because the NVS-31 UI is not updated in real time so the UI status display may not reflect the current device status.</p> <p>As a result, whether the device is operated on the panel, on the UI or both, please refresh the status page from time to time to make sure the information shown is the latest. You should also constantly monitor your video recording and streaming at the same time.</p>

Appendix 6: Dimensions

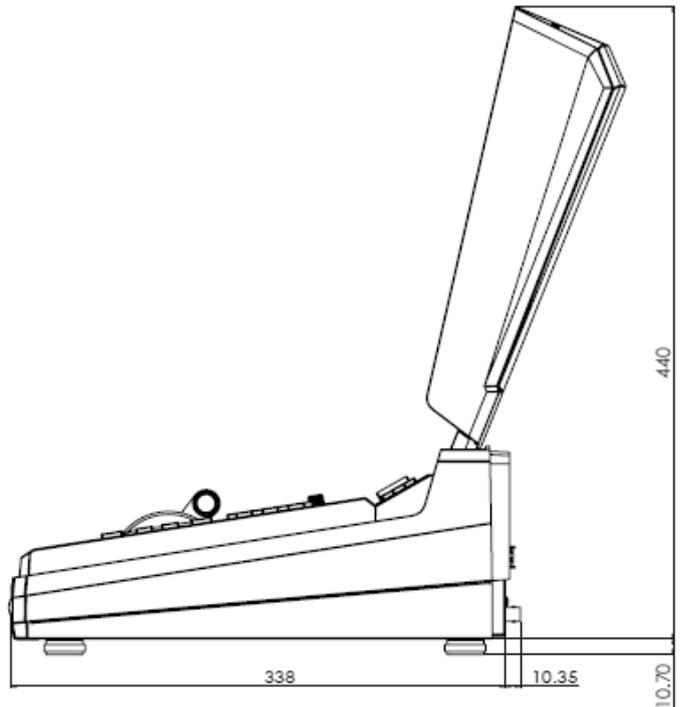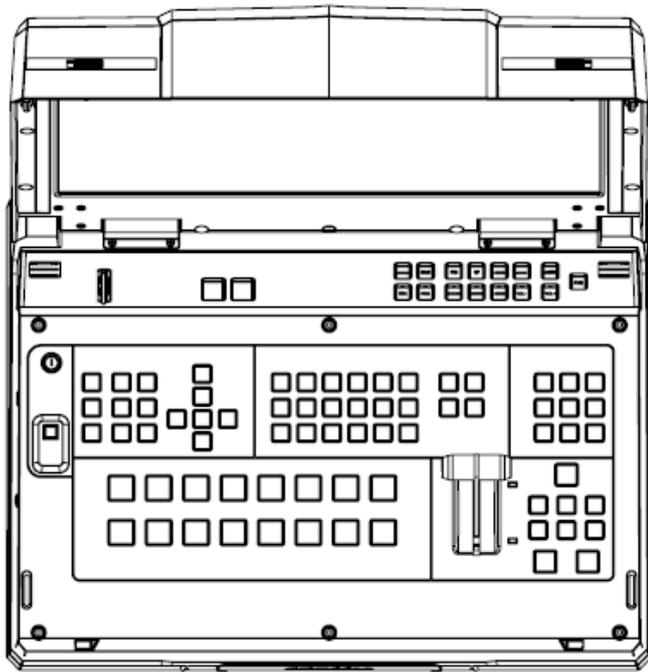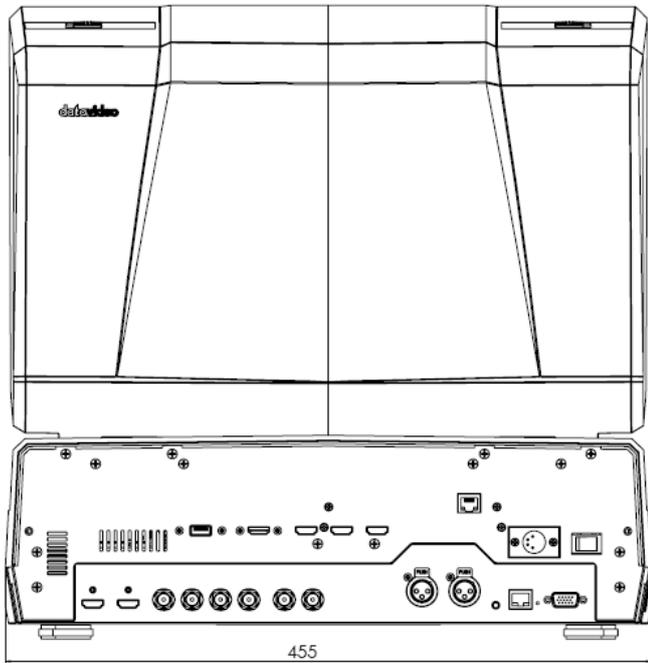

All measurements in millimeters (mm)

Appendix 7: Specifications

Connections	
Total Video Inputs	Total 6 inputs 2 HDMI (RGB/YVU, 1080P/1080I/720P) 4 SDI (1080I/720P)
Monitor External Input	1 HDMI
Total Outputs	3 HDMI + 2 SDI
SDI Audio Output (PGM output)	2CH
Audio Input	2 x XLR (2 x Analogue)
Internal Frame Synchronizers	All 6 Inputs
PGM Out	HDMI / SDI
Multi view Out	HDMI (720P -> 720P ; 1080i->1080P) SDI (720P -> 720P ; 1080i->1080i)
SDI Output	Select any from the following input sources PROGRAM (w/ DSK 1 & 2) PROGRAM (w/ DSK 1) Clean PROGRAM PREVIEW (w/o DSK) MULTISCREEN Input 1~6
HDMI OUT	HDMI OUT 1/2/3 are fixed to PGM
Audio Indicator on Multi view	Y (output 2CH)
Streaming	1 x RJ-45 (100/1000M Ethernet)
Storage	1x SD Card Slot Supports SD, SDHC and SDXC card (UHS-I) (Class 10 highly recommended).
Computer Output	Ethernet (Motion JPEG Out)
Tally Out	Y
GPI	Two mode: Level /Pulse trigger selectable
Speaker Volume Control	Control Knob
Switcher Software Updates	USB Port (Rear)
Monitor	
LCD Display	17.3" TFT LCD
Resolution	RGB 1600 x 900 pixel
Aspect Ratio	4:3 and 16:9 selectable
LED Life time	15,000 hrs. (approx.)
Brightness (Luminance)	220 cd/m ²
Contrast Ratio	650:1
View Angle	Top : 20 deg / Bottom : 45 deg Left : 45 deg / Right : 45 deg
Video System	NTSC / PAL auto recognition
Colour Adjustment	Brightness, Contrast, Color Saturation

Standards	
Format Support	1080i 50/ 59.94/ 60Hz, 720p 50/ 59.94/ 60Hz,
SDI Compliance	SMPTE 292M (SDI output /PGM out)
Video Sampling	4:2:2 10 bit
Color Precision	4:2:2 10 bit
Color Space	4:2:2 YUV
HDMI Input Resolutions for Computers	1280 x 720 59.94Hz 50Hz (720P) and 1920 x 1080 59.94Hz 50Hz (1080p & 1080i)
Processing	
Colorspace Conversion	Hardware based real time
Processing Delay	< 1 frame
Audio Mixer	Selectable audio follow video Master gain control
HD Down Conversion	N/A
Extras	
Upstream Keyers	2 (M/E Keyer & PIP)
Downstream Keyers	2
Linear/Luma Keyers	4
Chroma Keyers	2 (M/E Keyer & PIP)
Pattern Generators	Color Bar
PIP	1
XPT	Y
Frame store	Any Input can be used as Frame store. 8 Still frames stored in local frame buffers for instant access.
Control Panel Compatibility	Use PC via Ethernet; Control Panel
Input Voltage	8V~17V
Multi View Monitoring	
Number of Windows	2 (PGM, PVW) +6 (Inputs 1-6) +2 Output windows (SDI1, SDI2)
Routable Windows	Y (Follow XPT)
Tally	Y
Windows Source Labels	Y
Streaming Function	
Video Encode	<ul style="list-style-type: none"> • H.264 / AVC, Main/ High Profile • Configurable Bit-rate up to 10Mbps
Audio Encode	<ul style="list-style-type: none"> • AAC-LC • Configurable bit rate range from 32Kbps to 384Kbps • Sample rate: 48KHz, 16bit

Streaming Protocol	<ul style="list-style-type: none"> • TS over TCP/UDP (unicast & multicast) • RTSP over HTTP/TCP/UDP (RTSP Elementary Streaming) • RTMP (Publish)
Control	<p>Web browser UI for configuration and control</p> <p>Socket commands</p>
Recording File System	<p>FAT</p> <p>exFAT</p>
Recording File Format	MP4
Setting Control	Web UI for system configuration and control
Applications	<ul style="list-style-type: none"> • Youtube • Live House • UStream • Akamai • Facebook • Twitch • Wowza • Adobe Media Server

Service & Support

It is our goal to make owning and using Datavideo products a satisfying experience. Our support staff is available to assist you to set up and operate your system. Contact your local office for specific support requests. Plus, please visit www.datavideo.com to access our FAQ section.



Please visit our website for latest manual update.

www.datavideo.com.tw/product/HS-1300

datavideo
www.datavideo.com



@DatavideoUSA @DatavideoIndia2016
@DatavideoEMEA @Datavideojapan
@DatavideoTaiwan @DatavideoLatam
@DatavideoAsia @DatavideoBrasil



@Datavideo
@Datavideo_EMEA
@Datavideo_Taiwan



@DatavideoUSA
@DVTWDCN



@DatavideoUSA
@DatavideoEurope

All the trademarks are the properties of their respective owners.
Datavideo Technologies Co., Ltd. All rights reserved 2020

Dec-16.2019
Version E11