


datavideo

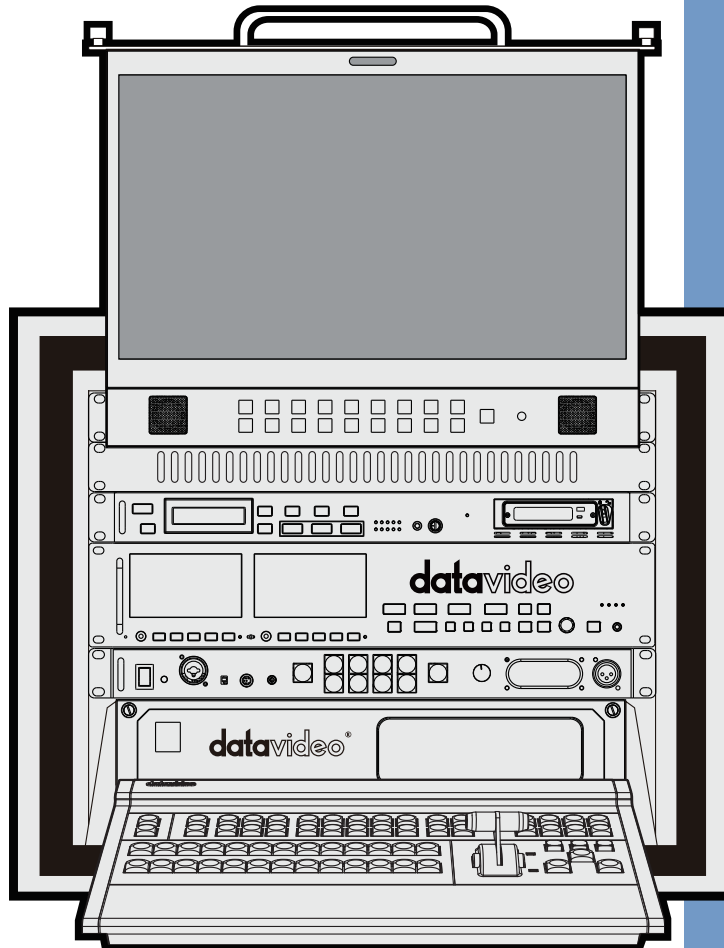

**HD/SD 12-CHANNEL
MOBILE VIDEO STUDIO
MS-2800A/B**

Instruction manual

www.datavideo.com

Contents

FCC COMPLIANCE STATEMENT	3
WARNINGS AND PRECAUTIONS	3
WARRANTY	4
STANDARD WARRANTY	4
THREE YEAR WARRANTY	4
DISPOSAL	4
INTRODUCTION	5
FEATURES	5
COMPATIBLE VIDEO STANDARDS	5
INSTALLATION	6
TRANSPORT & PLACEMENT	6
OPENING THE CASE	6
UNPACKING THE SE-2800 CONTROL PANEL KEYBOARD	7
SETTING UP THE TLM-170HM - 17" LCD MONITOR	7
MS-2800A	8
FRONT PANEL	8
REAR PANEL	8
MS-2800B	9
FRONT PANEL	9
REAR PANEL	9
POWERING ON	10
POWERING OFF	10
PACKING AWAY	10
DIMENSIONS	11
WEIGHTS	11
SPECIFICATIONS	11
SERVICE & SUPPORT	12

Disclaimer of Product and Services

The information offered in this instruction manual is intended as a guide only. At all times, Datavideo Technologies will try to give correct, complete and suitable information. However, Datavideo Technologies cannot exclude that some information in this manual, from time to time, may not be correct or may be incomplete. This manual may contain typing errors, omissions or incorrect information. Datavideo Technologies always recommend that you double check the information in this document for accuracy before making any purchase decision or using the product. Datavideo Technologies is not responsible for any omissions or errors, or for any subsequent loss or damage caused by using the information contained within this manual. Further advice on the content of this manual or on the product can be obtained by contacting your local Datavideo Office or dealer.

FCC Compliance Statement

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

Warnings and Precautions



The MS-2800 is HEAVY – approximately 70Kg. Two or more people are required to move this unit.

The MS-2800 should be always moved and placed in an upright position; do not place or try to move the unit in any other position as damage or injury could result. There are two sets of carry handles on either side of the case, please use these handles to safely share the weight between the people lifting the unit.

Always use a trolley to safely transport the unit over distances of 2 metres or more.

1. Read all of these warnings and save them for later reference.
2. Follow all warnings and instructions marked on this unit.
3. Unplug this unit from the wall outlet before cleaning. Do not use liquid or aerosol cleaners. Use a damp cloth for cleaning.
4. Do not use this unit in or near water.
5. Do not place this unit on an unstable cart, stand, or table. The unit may fall, causing serious damage.
6. Slots and openings on the cabinet top, back, and bottom are provided for ventilation. To ensure safe and reliable operation of this unit, and to protect it from overheating, do not block or cover these openings. Do not place this unit on a bed, sofa, rug, or similar surface, as the ventilation openings on the bottom of the cabinet will be blocked. This unit should never be placed near or over a heat register or radiator. This unit should not be placed in a built-in installation unless proper ventilation is provided.
7. This product should only be operated from the type of power source indicated on the marking label of the AC adapter. If you are not sure of the type of power available, consult your Datavideo dealer or your local power company.
8. Do not allow anything to rest on the power cord. Do not locate this unit where the power cord will be walked on, rolled over, or otherwise stressed.
9. If an extension cord must be used with this unit, make sure that the total of the ampere ratings on the products plugged into the extension cord do not exceed the extension cord rating.
10. Make sure that the total amperes of all the units that are plugged into a single wall outlet do not exceed 15 amperes.
11. Never push objects of any kind into this unit through the cabinet ventilation slots, as they may touch dangerous voltage points or short out parts that could result in risk of fire or electric shock. Never spill liquid of any kind onto or into this unit.
12. Except as specifically explained elsewhere in this manual, do not attempt to service this product yourself. Opening or removing covers that are marked "Do Not Remove" may expose you to dangerous voltage points or other risks, and will void your warranty. Refer all service issues to qualified service personnel.
13. Unplug this product from the wall outlet and refer to qualified service personnel under the following conditions:
 - a. When the power cord is damaged or frayed;
 - b. When liquid has spilled into the unit;
 - c. When the product has been exposed to rain or water;
 - d. When the product does not operate normally under normal operating conditions. Adjust only those controls that are covered by the operating instructions in this manual; improper adjustment of other controls may result in damage to the unit and may often require extensive work by a qualified technician to restore the unit to normal operation;

- e. When the product has been dropped or the cabinet has been damaged;
- f. When the product exhibits a distinct change in performance, indicating a need for service.

Warranty

Standard Warranty

- Datavideo equipment are guaranteed against any manufacturing defects for one year from the date of purchase.
- The original purchase invoice or other documentary evidence should be supplied at the time of any request for repair under warranty.
- The product warranty period begins on the purchase date. If the purchase date is unknown, the product warranty period begins on the thirtieth day after shipment from a Datavideo office.
- Damage caused by accident, misuse, unauthorized repairs, sand, grit or water is not covered under warranty.
- Viruses and malware infections on the computer systems are not covered under warranty.
- Any errors that are caused by unauthorized third-party software installations, which are not required by our computer systems, are not covered under warranty.
- All mail or transportation costs including insurance are at the expense of the owner.
- All other claims of any nature are not covered.
- Cables and batteries are not covered under warranty.
- Warranty only valid in the country or region of purchase.
- Your statutory rights are not affected.

Three Year Warranty

- All Datavideo products purchased after July 1st, 2017 are qualified for a free two years extension to the standard warranty, providing the product is registered with Datavideo within 30 days of purchase.
- Certain parts with limited lifetime expectancy such as LCD panels, DVD drives, Hard Drive, Solid State Drive, SD Card, USB Thumb Drive, Lighting, Camera module, PCIe Card are covered for 1 year.
- The three-year warranty must be registered on Datavideo's official website or with your local Datavideo office or one of its authorized distributors within 30 days of purchase.



Disposal



For EU Customers only - WEEE Marking

This symbol on the product or on its packaging indicates that this product must not be disposed of with your other household waste. Instead, it is your responsibility to dispose of your waste equipment by handing it over to a designated collection point for the recycling of waste electrical and electronic equipment. The separate collection and recycling of your waste equipment at the time of disposal will help to conserve natural resources and ensure that it is recycled in a manner that protects human health and the environment. For more information about where you can drop off your waste equipment for recycling, please contact your local city office, your household waste disposal service or the shop where you purchased the product.



CE Marking is the symbol as shown on the left of this page. The letters "CE" are the abbreviation of French phrase "Conformité Européene" which literally means "European Conformity". The term initially used was "EC Mark" and it was officially replaced by "CE Marking" in the Directive 93/68/EEC in 1993. "CE Marking" is now used in all EU official documents.

Introduction

The MS-2800 is an all-in-one HD/SD mobile video studio with a foldable 17" HD monitor. Built around the Datavideo SE-2800 switcher, the MS-2800 provides superb 10bit 4:2:2 broadcast quality video.

This mobile video studio, or portable production unit, is a ready to go solution; it will save a lot of crew time when setting up or breaking down in the field. The built-in Vectorscope and Waveform Monitor (MS-2800B only) allows your engineer to make sure all videos are matched and legal before the production starts. Owing to a bespoke tally and communication system, the MS-2800 also enables you as a producer/director to direct and manage a live production when working with a crew of 8 camera operators. In addition to monitoring and switching signals, the SE-2800 will also allow you to synchronise your cameras with an external reference signal. Owing to an AD-100 audio delay unit, the MS-2800 can also match the live audio feed to the mixed video output. By adding a removable HDD master recorder, the user is given the ability to watch or edit your footage at stunning 4:2:2 100Mbps I frame only quality, directly after the shoot.

That's Datavideo; sharing the value!

To get more value out of your equipment, please take a few minutes to read through this overview manual, and the other associated user manuals supplied within the product Manual Binder. This will help you to familiarize yourself with all aspects of the MS-2800 portable production unit.

Features

- Available in 2 versions: **MS-2800A** or **MS-2800B**.

MS-2800A without VSM-100 Vectorscope and Waveform monitor, without DAC-50 SDI to analogue converter and without PD-3 Power distribution center.

MS-2800B with additional VSM-100 Vectorscope and Waveform monitor, with DAC-50 SDI to analogue converter and with PD-3 Power distribution center.

Both also contain

- SE-2800 - HD/SD 12 channel digital video switcher.
- TLM-170H - 17" HD/SD 1U rackmount LCD underscan/overscan monitor.
- HDR-70 - HD-SDI 4:2:2 I frame only recorder with removable drive enclosure.
- ITC-100 – 8 Channel talkback unit with integrated bi-colour tally system.
- AD-100 – Audio delay unit allows delay of program audio by up to 17 frames.
- PD-2A – Power Distribution Center with automatic AC to DC fall over switch.
- 8U flight case - Foam filled, impact protective, for secure and safe transport.

Compatible Video Standards

- 1920 x 1080i 50
- 1920 x 1080i 59.94
- 1920 x 1080i 60

- 720 x 576i 50 (PAL)
- 720 x 480i 60 (NTSC)

Installation

Transport & Placement

The MS-2800 is heavy – approximately 70Kg – Do not attempt to lift or move it on your own.



A minimum of two people are required to lift or move this product. There are two carry handles on either side of the product, please use these handles to safely share the weight between the people lifting the unit.

Always use a trolley to safely transport the MS-2800 over distances of 2 Metres or more. The unit should be always moved and placed in an upright position; do not place or try to move the unit in any other way as damage or injury could result.

Place the MS-2800 on a strong, stable, flat surface that is capable of supporting the weight. Do not use a folding or single leg table to support the MS-2800.

Opening the case

On each side of the MS-2800 case there are wing nut clasps securing the front and rear covers.

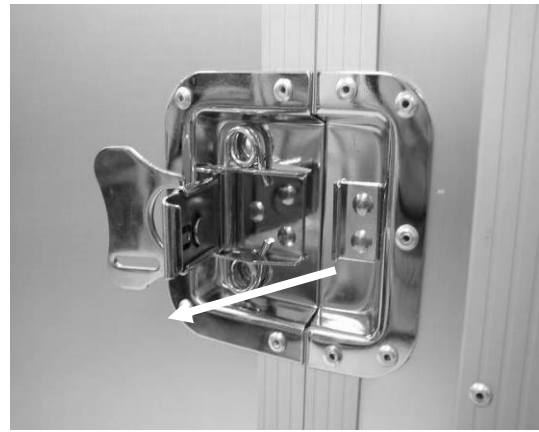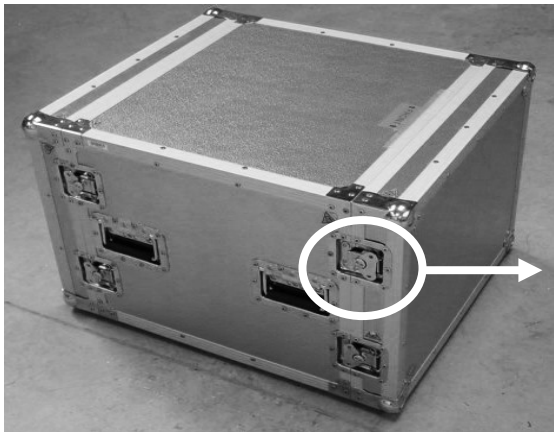

Undo each clasp by folding the wing nut out and then rotating it. The clasp can then swing free of the catch.

Once undone you can then remove the front and rear covers.

Unpacking the SE-2800 Control Panel Keyboard

The SE-2800 Control Panel Keyboard is held in its shipping position by a securing bolt on either side. To lower the Control Panel first remove the securing bolts as indicated below.




The bolts can then be stored on each hinge bracket before lowering the Control Panel Keyboard.



Setting up the TLM-170HM - 17" LCD monitor

Follow the steps below to set up the LCD monitor:

- Unfasten the two silver screws on the Left and Right of the TLM-170HM drawer handle.
- Using the handle pull out the TLM-170HM monitor until it clicks into place at the end of its rail.
- Now bring the LCD panel into an upright viewing position.

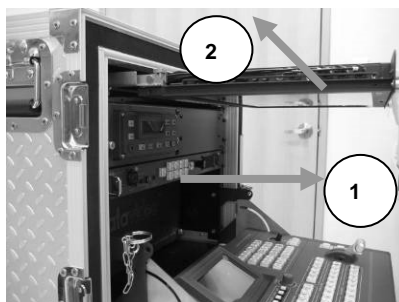

Front Panel

TLM-170HM : 17" HD / SD monitor which slides out from a 1 RU storage position. Connections for SDI / HD-SDI, HDMI, YPbPr and Composite. Display overlays for Timecode, Center Mark, 4:3 aspect, Cinema zone and embedded audio peak meter (SDI / HDMI only).

HDR-70 : SDI / HD-SDI Removable HDD recorder. Records I-Frame only 100Mbps to m2t files.

ITC-100 : Eight channel wired talkback system with integrated tally interface. Supplied with cables, belt packs, headsets and tally lights.

SE-2800 : SD / HD Digital Video Switcher. Main unit and Control Panel. Provides 10bit 4:2:2 broadcast quality pictures.

Rear Panel

RP-50 : Rack panel with 3pin IEC type AC Power outlet (rated 12V 10A) from PD-2A (see below).

RP-31: ITC-100 talk back breakout panel. Rack panel for connection of ITC-100 belt pack cables (5pin XLR).

AD-100 : Audio Delay Unit. Delay Program audio by up to 17 frames.

PD-2A : Power Distribution unit with automatic fall over from AC to DC input.

SE-2800 : Main unit rear panel with power, control panel and multi-view outputs already connected for your convenience.



Front Panel

TLM-170HM : 17" HD / SD monitor which slides out from a 1 RU storage position. Connections for SDI / HD-SDI, HDMI, YPbPr and Composite. Display overlays for Time code, Center Mark, 4:3 aspect, Cinema zone and embedded audio peak meter (SDI / HDMI only).

HDR-70 : SDI / HD-SDI Removable HDD recorder. Records I-Frame only 100Mbps to m2t files.

VSM-100 : Waveform and Vector scope monitor for video signal analysis.

ITC-100 : Eight channel wired talkback system with integrated tally interface. Supplied with cables, belt packs, headsets and tally lights.

SE-2800 : SD / HD Digital Video Switcher. Main unit and Control Panel. Provides 10bit 4:2:2 broadcast quality pictures

Rear Panel

RP-45A : Rack mounted CVBS Distribution Amplifier. Provides 8x Program output.

RP-31 : ITC-100 talk back breakout panel. Rack panel for connection of ITC-100 belt pack cables (5pin XLR).

PD-3 : Power Distribution unit with user adjustable 4 pin XLR out. Ideal for powering cameras with DC voltage up to 24V.

RP=51 : 1U Half Rack panel with Switcher SDI PGM outputs and HDMI Multi-view output 2.

AD-100 : Audio Delay Unit. Delay Program audio by up to 17 frames.

PD-2A : Power Distribution unit with automatic fall over from AC to DC input.

SE-2800 : Main unit rear panel with power, control panel and multi-view outputs already connected for your convenience.



Powering On

Each product built into this Mobile Video Studio receives DC power from the PD-2A unit on the rear of the MS-2800.

Please ensure the PD-2A is fed with either an AC or DC feed before attempting to switch on the MS-2800.

For more information on the PD-2A please refer to its manual in the binder.

If a product within the MS-2800 fails to start after the PD-2A is switched on please locate the on/off switch for that product which has not yet started.

For further advice on using a product within the MS-2800 please refer to its manual in the binder.

Powering Off

Before powering off the MS-900 via the PD-2A on/off switch please ensure the DN-500 has been stopped.

Packing Away

Once the external source and camera cabling have been removed from the rear connection plates replace and secure the rear case cover.

Return the ITC-100 gooseneck mic, any ITC-100 cabling, tally lights and headsets etc to your accessory kit bag/box.

Carefully lower the 17" TLM-170HM monitor and slide it back into its horizontal 1U shipping position. Please remember to secure the silver screws so it cannot slide/move when in transit.

Now raise/tilt upwards the SE-2800 Control Panel Keyboard and secure it in its shipping position with the chained securing bolts.

Now return and secure the front cover and the MS-2800 is ready to be moved.

Dimensions

All dimensions in mm.

	MS-2800 A	MS-2800 B
Height	480	480
Width	610	610
Depth	710	710
	Accessory Kit A	Accessory Kit B
Height	365	365
Width	496	496
Depth	475	475

Weights

The MS-2800 is heavy – approximately 70Kg – Do not attempt to lift or move it on your own.

A minimum of two people are required to lift or move this product. There are two carry handles on either side of the product, please use these handles to safely share the weight between the people lifting the unit.

	MS-2800 A	MS-2800 B
Gross Weight (Packed/Pallet)	78 Kg	83 Kg
Nett Weight (unpacked unit only)	65 Kg	70 Kg
Accessory Kit (Gross packed)	10 Kg	10 Kg

Always use a trolley to safely transport the MS-2800 over distances of 2 Metres or more.

The unit should be always moved and placed in an upright position; do not place or try to move the unit in any other way as damage or injury could result.

Place the MS-2800 on a strong, stable, flat surface that is capable of supporting the weight.

Do not use a folding or single leg table to support the MS-2800.

Specifications

The MS-2800 is a combination of Datavideo products, for the specifications of a particular product please refer to its manual within the supplied binder.

Service & Support

It is our goal to make your products ownership a satisfying experience. Our supporting staff is available to assist you in setting up and operating your system. Please refer to our web site www.datavideo.com for answers to common questions, support requests or contact your local office below.

China Shanghai
Datavideo Technologies China Co
601, Building 10, No. 1228,
Rd. Jiangchang,
Jingan District, Shanghai
Tel: +86 21-5603 6599
Fax: +86 21-5603 6770
E-mail: service@datavideo.cn

China Beijing
Datavideo Technologies China Co
No. 812, Building B, Wankai Center,
No. 316, Wan Feng Road, Fengtai District,
Beijing, China
Tel: +86 10-8586 9034
Fax: +86 10-8586 9074
E-mail: service@datavideo.cn

China Chengdu
Datavideo Technologies China Co
B-823, Meinian square, No. 1388,
Middle of Tianfu Avenue, Gaoxin District,
Chengdu, Sichuan
Tel: +86 28-8613 7786
Fax: +86 28-8513 6486
E-mail: service@datavideo.cn

China Fuzhou
Datavideo Technologies China Co
A1-2318-19 Room, No. 8, Aojiang Road,
Taijiang District, Fuzhou, Fujian, China
Tel: 0591-83211756 · 0591-83210187
Fax: 0591-83211262
E-mail: service@datavideo.cn

China Jinan
Datavideo Technologies China Co
902, No. 1 business building,
Xiangtai Square, No. 129,
Yingxiangshan Road, Shizhong District,
Jinan City, Shandong Province, China
Tel: +86 531-8607 8813
E-mail: service@datavideo.cn

Hong Kong
Datavideo Hong Kong Ltd
G/F., 26 Cross Lane
Wanchai, Hong Kong
Tel: +852-2833-1981
Fax: +852-2833-9916
E-mail: info@datavideo.com.hk

India Noida
Datavideo India Noida
A-132, Sec-63, Noida-201307,
India
Tel: +91-0120-2427337
Fax: +91-0120-2427338
E-mail: sales@datavideo.in

India Kochi
Datavideo India Kochi
2nd Floor- North Wing, Govardhan Building,
Opp. NCC Group Headquarters, Chittoor Road,
Cochin- 682035
Tel: +91 4844-025336
Fax: +91 4844-047696
E-mail: sales@datavideo.in

Netherlands
Datavideo Technologies Europe BV
Floridadreef 106
3565 AM Utrecht,
The Netherlands
Tel: +31-30-261-96-56
Fax: +31-30-261-96-57
E-mail: info@datavideo.nl

Singapore
Datavideo Visual Technology(S) Pte Ltd
No. 178 Paya Lebar Road #06-07
Singapore 409030
Tel: +65-6749 6866
Fax: +65-6749 3266
E-mail: info@datavideovirtualset.com

Singapore
Datavideo Technologies (S) PTE Ltd
No. 178 Paya Lebar Road #06-03
Singapore 409030
Tel: +65-6749 6866
Fax: +65-6749 3266
E-mail: sales@datavideo.sg

Taiwan
Datavideo Technologies Co. Ltd
10F. No. 176, Jian 1st Rd., Chung Ho
District, New Taipei City 235, Taiwan
Tel: +886-2-8227-2888
Fax: +886-2-8227-2777
E-mail: service@datavideo.com.tw

United States
Datavideo Corporation
7048 Elmer Avenue.
Whittier, CA 90602,
U.S.A.
Tel: +1-562-696 2324
Fax: +1-562-698 6930
E-mail: sales@datavideo.com

United Kingdom
Datavideo UK Limited
Brookfield House, Brookfield Industrial
Estate, Peakdale Road, Glossop,
Derbyshire, SK13 6LQ
Tel: +44-1457 851 000
Fax: +44-1457 850 964
E-mail: sales@datavideo.co.uk

France
Datavideo France s.a.r.l.
Cit  Descartes 1, rue Albert Einstein
Champs sur Marne 774477 –
Marne la Vall e cedex 2
Tel: +33-1-60370246
Fax: +33-1-60376732
E-mail: info@datavideo.fr



Please visit our website for latest manual update.
www.datavideo.com/product/MS-2800

datavideo
www.datavideo.com