

Power Center

PD-3



Instruction Manual

www.datavideo-tek.com

Contents

Warnings and Precautions	3
Warranty.....	4
Standard Warranty	4
Two Year Warranty.....	4
Disposal	4
Packing List	4
Product Overview	5
Features	5
Example Set Up.....	5
Connections & Controls	6
Front Panel.....	6
Rear Panel.....	6
DC Output Voltage Selection	6
XLR Pin Out Guide	6
Specification	7
Service and Support	8

Disclaimer of Product and Services

The information offered in this instruction manual is intended as a guide only. At all times, Datavideo Technologies will try to give correct, complete and suitable information. However, Datavideo Technologies cannot exclude that some information in this manual, from time to time, may not be correct or may be incomplete. This manual may contain typing errors, omissions or incorrect information. Datavideo Technologies always recommend that you double check the information in this document for accuracy before making any purchase decision or using the product. Datavideo Technologies is not responsible for any omissions or errors, or for any subsequent loss or damage caused by using the information contained within this manual. Further advice on the content of this manual or on the product can be obtained by contacting your local Datavideo Office or dealer.



Warnings and Precautions

1. Read all of these warnings and save them for later reference.
2. Follow all warnings and instructions marked on this unit.
3. Unplug this unit from the wall outlet before cleaning. Do not use liquid or aerosol cleaners. Use a slightly damp cloth for cleaning.
4. Do not use this unit in or near water.
5. Do not place this unit on an unstable surface, cart, stand, or table. The unit may fall, causing serious damage.
6. Any slots and openings on the case top, back, and bottom are provided for ventilation. To ensure safe and reliable operation of this unit, and to protect it from overheating, do not block or cover these openings. Do not place this unit on a bed, sofa, rug, or similar surface, as the ventilation openings may become blocked. This unit should never be placed near or over a heat source or radiator. This unit should not be placed in a built-in installation unless proper ventilation is provided.
7. This product should only be operated from the type of power source indicated on the marking label of the AC adapter. If you are not sure of the type of power available, consult your Datavideo dealer or your local power company.
8. Do not allow anything to rest on the power cord. Do not locate this unit where the power cord will be walked on, rolled over, damaged or otherwise stressed.
9. If an extension cord must be used with this unit, make sure that the total of the ampere ratings on the products plugged into the extension cord do not exceed the extension cord's rating.
10. Make sure that the total amperes of all the units that are plugged into a single wall outlet do not exceed 15 amperes.
11. Never push objects of any kind into this unit through the case ventilation slots, as they may touch dangerous voltage points or short out parts that could result in risk of fire or electric shock. Never spill liquid of any kind onto or into this unit.
12. Except as specifically explained elsewhere in this manual, do not attempt to service this product yourself. Opening or removing covers that are marked "Do Not Remove" may expose you to dangerous voltage points or other risks, and will void your warranty. Refer all service issues to qualified service personnel.
13. Unplug this product from the wall outlet and refer to qualified service personnel under the following conditions:
 - a. When the power cord is damaged or frayed;
 - b. When liquid has spilled into the unit;
 - c. When the product has been exposed to rain or water;
 - d. When the product does not operate normally under normal operating conditions. Adjust only those controls that are covered by the operating instructions in this manual; improper adjustment of other controls may result in damage to the unit and may often require extensive work by a qualified technician to restore the unit to normal operation;
 - e. When the product has been dropped or the case has been damaged;
 - f. When the product exhibits a distinct change in performance, indicating a need for service.

Warranty

Standard Warranty

- Datavideo equipment is guaranteed against any manufacturing defects for one year from the date of purchase.
- The original purchase invoice or other documentary evidence should be supplied at the time of any request for repair under warranty.
- Damage caused by accident, misuse, unauthorized repairs, sand, grit or water is not covered by this warranty.
- All mail or transportation costs including insurance are at the expense of the owner.
- All other claims of any nature are not covered.
- Cables & batteries are not covered under warranty.
- Warranty only valid within the country or region of purchase.
- Your statutory rights are not affected.

Two Year Warranty

- All Datavideo products purchased after 01-Oct.-2008 qualify for a free one year extension to the standard Warranty, providing the product is registered with Datavideo within 30 days of purchase. For information on how to register please visit www.datavideo-tek.com or contact your local Datavideo office or authorized Distributors
- Certain parts with limited lifetime expectancy such as LCD Panels, DVD Drives, Hard Drives are only covered for the first 10,000 hours, or 1 year (whichever comes first).

Any second year warranty claims must be made to your local Datavideo office or one of its authorized Distributors before the extended warranty expires.

Disposal



For EU Customers only - WEEE Marking

This symbol on the product indicates that it should not be treated as household waste. It must be handed over to the applicable take-back scheme for the recycling of Waste Electrical and Electronic Equipment. For more detailed information about the recycling of this product, please contact your local Datavideo office.

Packing List

Item No.	Description	Quantity
1	Instruction Manual	1
2	PD-3	1
3	AC Cord	1


Product Overview

Lights, Cameras, PD-3! The Datavideo PD-3 is a 19" rack mountable universal AC to DC power distribution center. Designed to be used in conjunction with Datavideo Mobile Video Studios, like the MS-900, and the CB-22 / CB-23 all in one cable. The PD-3 supplies a steady user chosen voltage for your non-Datavideo production kit whilst on location or in your studio.

Features

- Automatically adjusts to work with 50Hz or 60Hz supplies between 100-240 VAC.
- 8 DC outputs with a combined total power consumption of 360 Watts.
- Each DC output can be switched to provide either 12 , 14.4 , 18 or 25 Volts.
- Each DC output has a multi-colour LED confirming the chosen voltage by colour.
- The unit is designed to provide both DC & AC overload protection.
- A standard 19" – 1U rack mountable case.

Example Set Up

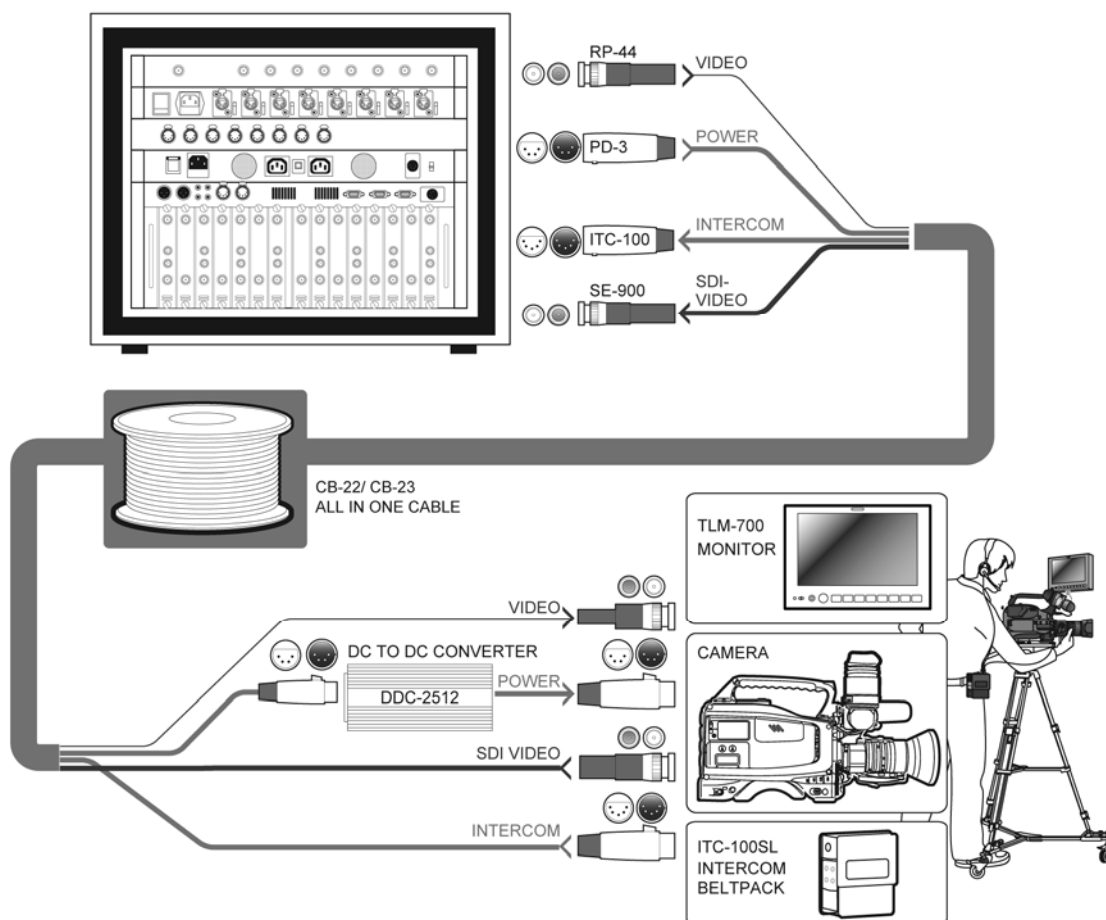

Connections & Controls

Front Panel




AC Inlet for connecting to suitable mains power outlet – 100-240VAC. The socket contains a fuse holder fitted with a 6A /250V fuse.

Rear Panel



Has two built-in cooling fans, please ensure that these are not blocked, and that some airflow is available.

DC Output Voltage Selection

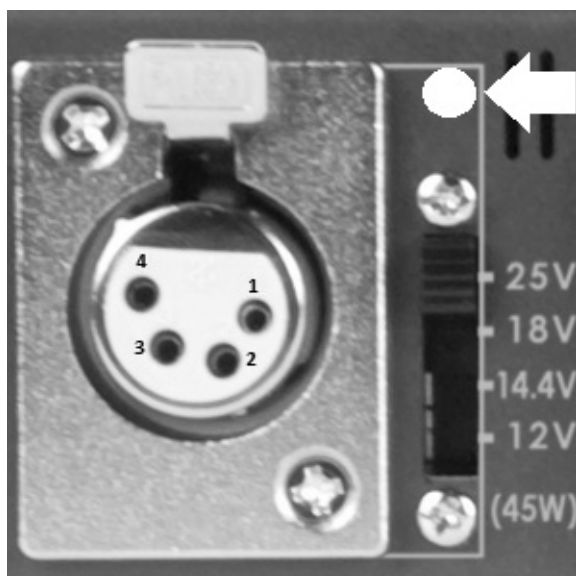

Multi-Colour LED

- 25 V DC (1.8A) LED colour = Red
- 18 V DC (2.5A) LED colour = White
- 14.4 V DC (3A) LED colour = Green
- 12 V DC (3.5A) LED colour = Blue

XLR Pin Out Guide

The following information is provided to allow competent engineers to create their own bespoke XLR DC power cable connections. See above picture also. For further advice and guidance please contact your dealer or local Datavideo office.

- Pin 1 = GND (-)
- Pin 2 = NC
- Pin 3 = NC
- Pin 4 = VCC (+)

Specification

AC Input	Voltage Range	100~240 VAC
	AC frequency	50Hz or 60Hz
	Fuse Rating	6A/250VAC
	Efficiency(Typ.)	UP TO 80%
DC Output	DC Voltage	12V、 14.4V、 18V、 25V
	Voltage Tolerance	±3%
	Rated Current	12V(3.5A)、 14.4V(3A)、 18V(2.5A)、 25V(1.8A)
	Current Range	0~3.5A
	Rated Power(Max)	45W / one group
Protection	DC Overload	105%~150% rated output power
		Protection type: Recovery automatically after fault condition is removed
	AC Overload	non-recovery fuse on the AC input outlet
Connector	On/Off Switch	Powers the PD-3 On / Off Light switch indicator
	AC In outlet with built-in fuse	AC Inlet for connecting to suitable mains power outlet – 100-240VAC. The socket contains a fuse holder fitted with a 6A /250V fuse.
	4PIN XLR Female	8 Groups DC OUTPUT : (PIN1:GND , PIN2/3:NC , PIN4:VCC)
	Slide Switch	8 Groups Switch : There are four options for each group : 12V、 14.4V、 18V、 25V DC output
Environment	Working Temp	0°C to 40°C (32°F to 102°F)
	Working Humidity	10% to 90% (non condensing)
	Storage Temp. Humidity	-40°C to +85°C, 10~95% RH
Others	Cooling Fan	Has two built-in cooling fans, please ensure that these are not blocked, and that some airflow is available.
	DC Output LED Indicator	LED Color Indicator : Red:25V,White:18V,Green:14.4V,Blue:12V
	Dimension	440 mm x 235 mm x 46 mm (L x W x H)
	Weight	Approx. 5.2 kg/ 11.5 lbs
	Ground Terminal	When connecting this unit to any other component, make sure that it is properly grounded by connecting this terminal to an appropriate point. When connecting, use the socket and be sure to use wire with a cross-sectional area of at least 1.0 mm ² .

Service and Support

It is our goal to make your products ownership a satisfying experience. Our support staff are available to assist you in setting up and operating your system. Please refer to our web site www.datavideo-tek.com for answers to common questions, support requests or contact your local office below.

Datavideo Global Website: www.datavideo-tek.com

Datavideo Corporation

Tel: +1 562 696 2324	Fax: +1 562-698-6930	E-Mail: contactus@datavideo.us
----------------------	----------------------	--

Datavideo Technologies Europe BV

Tel: +31-30-261-96-56	Fax: +31-30 261-96-57	E-Mail: service@datavideo.nl
-----------------------	-----------------------	--

Datavideo UK Limited

Tel: +44 1457 851 000	Fax: +44 1457 850 964	E-Mail: sales@datavideo.co.uk
-----------------------	-----------------------	--

Datavideo Technologies Co., Ltd

Tel: +886 2 8227 2888	Fax: +886-2-8227-2777	E-mail: service@datavideo.com.tw
-----------------------	-----------------------	--

Datavideo Technologies China Co., Ltd

Tel: +86 21-5603 6599	Fax: +86 21-5603 6770	E-mail: service@datavideo.cn
-----------------------	-----------------------	--

Datavideo Technologies (S) PTE Ltd

Tel: +65-6749 6866	Fax: +65-6749 3266	E-mail: sales@datavideo.sg
--------------------	--------------------	--

Datavideo HK Ltd

Tel: +852 2833 1981	Fax: +852-2833-9916	E-mail: info@datavideo.com.hk
---------------------	---------------------	--

Datavideo France s.a.r.l.

Tel: +33 1 60 37 02 46	Fax: +33 1 60 37 67 32	E-mail: info@datavideo.fr
------------------------	------------------------	--

Datavideo Technologies India PVT LTD.

Tel: +91 120 4309120	Fax: +91 120 4309121	E-mail: sales@datavideo.in
----------------------	----------------------	--

All the trademarks are the properties of their respective owners.

Datavideo Technologies Co., Ltd. All rights reserved 2011.

Rev Date: 12/06/2012

P/N: G082060550E2