

# 4 DV | Y:U:V | Y/C & Composite Video



## HS-800

- TLM-702**  
2 x 7" TFT LCD  
Monitor Bank
- TLM-404**  
4 x 4" TFT LCD  
Monitor Bank
- ITC-100**  
Talkback/intercom  
system
- SE-800**  
DV/Analogue  
Switcher
- DN-500**  
Harddrive player/  
recorder with  
removable hard drive




The Datavideo HS-800 is a light one box solution designed around the SE-800 4 channel DV / analogue audio video switcher. The SE-800 allows four channels of digital or analogue video and up to six channels of audio to be mixed / switched.

The whole system is fully integrated with the DN-500 harddrive recorder with removable hard drive carriers, ITC-100 for talkback / intercom, RMC-140 for next source preview and tally display, TLM-404 for input monitoring and TLM-702 for next source and main output monitoring.

HS-800 is a one box solution designed to be "live in seconds" at any Conference, Studio, Outside Broadcast or Internet Streaming facility.

### REAR VIEW

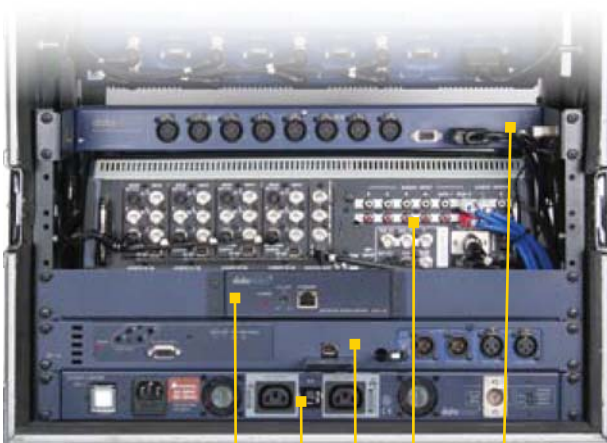

RP-38(Optional) PD-1 RP-4 SE-800 ITC-100



### FEATURES

#### 1. Built in PD-1 power distribution centre

- (1) Built in PD-1 power distribution centre. Eliminates unsightly wall connections and dangling power supplies. Power all equipment from a single AC Mains or 12V DC power cable.
- (2) Fully integrated cable loom

#### 2. Video Connections

- (1) Input connections include; DV25, Component (Y:U:V), S-Video (Y/C) and Composite Video.
- (2) Output connections include; Component (Y.U.V) which could be connected to a DVD recorder or projector, DV which could be connected to a DV Deck and SDI output for live broadcast.

#### 3. Highly Mobile.

- (1) HS-800 is designed to be ready in seconds on any location
- (2) Easy Setup, break down and storage

#### 4. Complete Integration

- (1) Fully integrated tally and talkback system for up to eight crew members.
- (2) An extensive rear panel accessory range ensures easy connection to existing equipment on location or in the studio.

#### 5. Safety & Warranty

- (1) Anti shock padding and transit lock protect the equipment during transport
- (2) One supplier to complete the integration and to ensure your warranty

### DIMENSIONS

