

4" X 4 SD TFT LCD MONITOR TLM-404H



FEATURES

- Screen Resolution RGB 480 x 240 pixels
- Viewing angles; Top: 10° / Bottom: 30° / Left & Right: 45°
- Contrast ratio – 350:1
- Can be tilted up to 90 degrees.
- PAL / NTSC auto detect
- 2U 19" rack mountable
- Aux input via D-sub 9-Pin
- Composite Video connections with 75 ohm self terminating loop through.
- 3 Colour LED tally lights indicator on each monitor.
- Individual adjustments for Contrast, Brightness and Colour Saturation.
- 12v DC (supplied with mains DC converter).

FEATURES

Power Switch



All these images need to be same size

Adjustable View Angle



Tilt 45 degree viewing angle

Locking Pivot Point



Strong locking pivot point

Image Correction




Each monitor has individual adjustments for contrast, brightness, color and tint (NTSC mode only). Includes 3-color LED tally lights



TLM-404H is an ideal accessory for use with Datavideo's SE-800 or other switchers

REAR VIEW

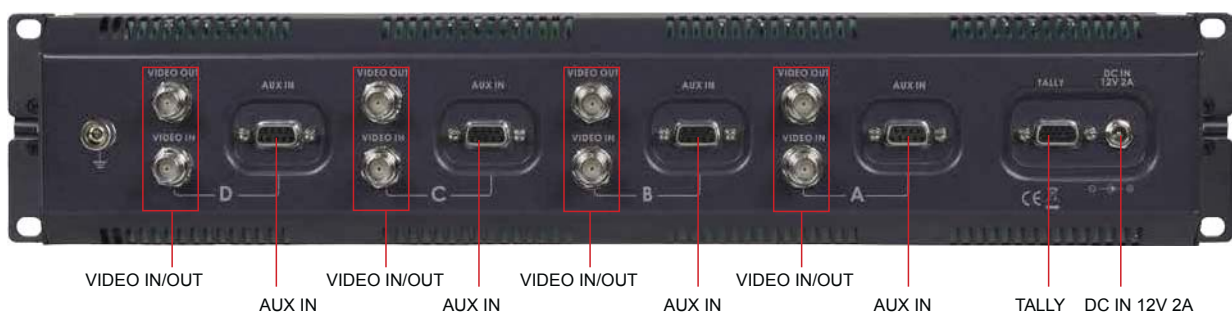

SPECIFICATIONS

LCD COMPARISON TABLE

							 		
Screen Chassis	TLM-170P 1 x 17.3" * Tabletop * Tilttable Screen	TLM-170H/HM/HR 1 x 17.3" Back-Lit LED * Tabletop (170H) * 1U Rack Pull-Out (HM) * 7U Rack Face-Mount (HR)	TLM-702HD 2 x 7" LCD/Back-Lit LED 3U Rack Mount	TLM-702 2 x 7" TFT LCD 3U Rack Mount	TLM-700HD 1 x 7" Back-Lit LED 1/4 - 20" Thread Hole Mount	TLM-700 1 x 7" TFT LCD 1/4 - 20" Thread Hole Mount	TLM-434H 4 x 4.3" TFT LCD 2U Rack Mount	TLM-430 1 x 4.3" TFT LCD 1/4 - 20" Thread Hole Mount	
Resolution	1920x1080	1600x900	800x480	480x234	800x480	480x234	480x272	480x272	
Video Inputs	2 x HDMI, 2 x 3G/HD/SD-SDI, 1 x S-Video, 1 x Component YUV, 2 x Composite Video	2 x Composite Video, 1 x S-Video, 1 x HD Component YUV, 1 x HD/SD-SDI, 2 x HDMI	2 x HD Component 2 2x HD/SD-SDI, YUV, 2 x HDMI, 2 x Composite Video	4 x Composite Video	1 x Composite Video, 1 x HD/SD-SDI, 1 x HD Component YUV, 1 x HDMI	2 x Composite Video	4 x Composite Video	4 x Composite Video	2 x Composite Video
Loop Through	1 x 3G/HD/SD-SDI, 2 x Composite Video	1 x HD/SD-SDI	N/A	4 x Composite Video	N/A	N/A	4 x HD/SD-SDI	N/A	
Supported Input Resolutions	1080p (23.98/24/25/30/50/ 59.95/60Hz), 1080i (50/59.94/60Hz), 1280x720p (50/59.94/60 Hz), 720x480i (NTSC), 720x576i (PAL)	1920x1080i (50/60Hz), 1280x720p (50/60 Hz), 720x480i (NTSC), 720x576i (PAL)	1920x1080i (50/60Hz), 1280x720p (50/60 Hz), 720x480i (NTSC), 720x576i (PAL)	720x480i (NTSC), 720x576i (PAL)	1920x1080i (50/60Hz), 1280x720p (50/60 Hz), 720x480i (NTSC), 720x576i (PAL)	720x480i (NTSC), 720x576i (PAL)	720x480i (NTSC), 720x576i (PAL)	720x480i (NTSC), 720x576i (PAL)	
Aspect Ratio	16:9, 4:3	16:10, 16:9, 4:3	16:9, 15:9, 4:3	16:9, 4:3	16:9, 15:9, 4:3	16:9, 4:3	16:9, 4:3	16:9, 4:3	
NTSC/PAL Tally	Auto-Detect Live (Red) / Cued (Amber)	Auto-Detect Live (Red) / Cued (Amber)	Auto-Detect Live (Red) / Cued (Amber)	Auto-Detect Live (Red) / Cued (Amber)	Auto-Detect Live (Red) / Cued (Amber)	Auto-Detect Live (Red) / Cued (Amber)	Auto-Detect Live (Red) / Cued (Amber)	Auto-Detect Live (Red) / Cued (Amber)	
Audio	* Plays Embedded Audio in 3G/HD/SD-SDI and HDMI * 4 x Mono RCA Inputs * Stereo Speakers	* Plays Embedded Audio in HD/SD-SDI and HDMI * 4 x Mono RCA Inputs * Stereo Speakers	* Audio Presence Indicator * Audio Level Meter * 2 x Stereo Headphone Mini Jack	N/A	* Audio Presence Indicator * Audio Level Meter * Stereo Headphone Mini Jack	N/A	N/A	* 4 x Stereo Headphone Mini Jacks * Embedded Audio Peak Meter	N/A
Special Features	* 3G-SDI Support * Picture-in-Picture * Blue Only * Audio Level Indicator * Safe Frame	* Available in Tabletop (H), 1U Pull-Out (HM), or 7U Face-Mounted (HR) Models * Picture-in-Picture * Blue Only * Audio Level Indicator	* Blue Only * Safe Frame * VITC Time Code Display	* Dual Screens * Dual Inputs and Dual Loop-Throughs per Screen	* Blue Only * Safe Frame * VITC Time Code Display * Can Use Batteries (Not Included) as Power Source	* Carrying Case Included * Sunshade Included	* 4 x Screens, each with its own loop-through	* Can powered by DC adaptor; Sony batteries or D-TAP. * TLM-43LB Camera look back system (with RMC-200 and control cable)	
Consumption	DC 12V, 30 watts	DC 12V, 15 watts	DC 12V, 30 watts	DC 12V, 12 watts	DC 12V, 18 watts	DC 12V, 6 watts	DC 12V, 15 watts	DC 12V, 6 watts	