


PAGEBUILDER OS

All SmallHD on-camera monitors are equipped with the powerful and easy-to-use PageBuilder operating system. Listed below are some instructions on how to get familiar with this system. A Page is a way to organize and access all of your image analysis tools. You can have up to eight different Pages, not including the SETTINGS, DUAL VIEW, and OUTPUT PREVIEW PAGE.

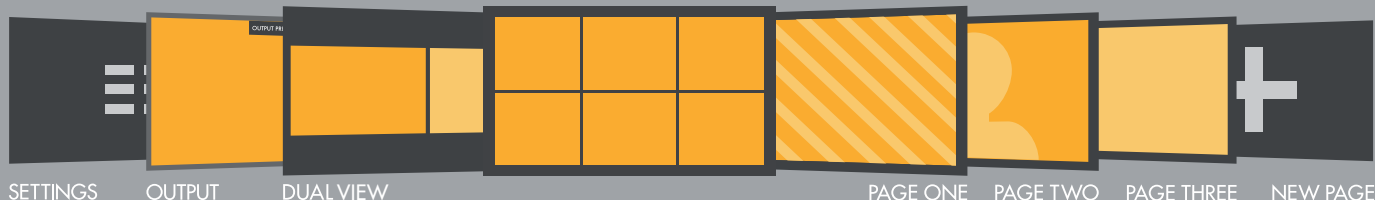

MENU NAVIGATION

MONITOR SETTINGS

Navigate thumbstick LEFT ◀ until monitor settings appear.
Press thumbstick UP ▲ and DOWN ▼ to navigate.
Press thumbstick IN ■ to select.
Press BACK BUTTON ◀ to go to previous Page.

CHANGE PAGES

Navigate thumbstick LEFT ◀ or RIGHT ▶ to access Pages View.

PAGES VIEW

Press BACK BUTTON ◀ or thumbstick DOWN ▼ to access Pages View.
Navigate thumbstick LEFT ◀ and RIGHT ▶ to cycle through Pages.
Navigate thumbstick UP ▲ or PRESS thumbstick IN ■ to select desired Page.

ADD A PAGE

Press BACK BUTTON ◀ or thumbstick DOWN ▼ to access Pages View.
Navigate thumbstick RIGHT ▶ until New Page + appears.
PRESS thumbstick IN ■ to create a New Page.

ADD A NEW TOOL

Press thumbstick IN ■ to bring up the Tool Bar.
Press thumbstick IN ■ to select a Tool.
Navigate thumbstick RIGHT ▶ to customize the Tool.
Press thumbstick IN ■ to select.
Press the BACK BUTTON ◀ to go back or remove Tool Bar.

DUAL VIEW

View two sources side by side via HDMI or SDI.

HDR PREVIEW

In the Settings > Input menu, select the gamma that matches the camera source.


FOLLOW US ON SOCIAL MEDIA

@smallhd    







For detailed video tutorials visit: www.smallhd.com/videos

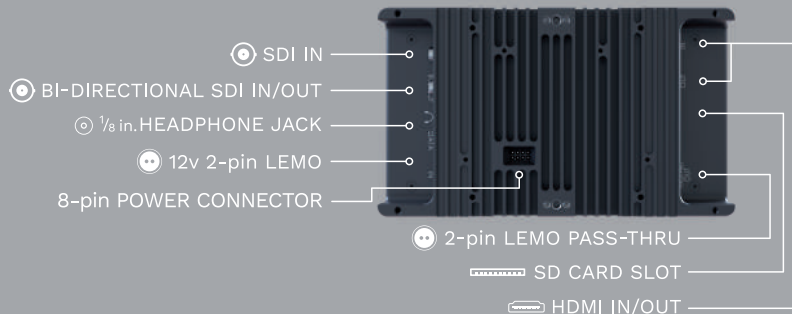


703 ULTRA BRIGHT QUICKSTART GUIDE



USER INTERFACE

-  **POWER ON/OFF + GO BACK**
Hold to power on/off. Press to navigate to previous Page.
-  **1/8 in. HEADPHONE JACK**
Listen to audio through your monitor.
-  **FUNCTION BUTTONS**
Press and Hold to assign button to specific function.
-  **THUMBSTICK**
Menu navigation.
-  **12v 2-pin LEMO IN**
Industry standard 12v LEMO IN. Utilize the included LEMO to D-TAP cable to connect your monitor to a D-TAP power source.
-  **12v 2-pin LEMO OUT**
Power your wireless device with the 12v 2-pin LEMO auxiliary power.

-  **SD CARD SLOT**
Load 3D LUTs firmware updates, and save screen captures.
-  **SD IN/OUT**
Input 2x SDI signals or 1x SDI IN and 1x SDI OUT.
-  **CROSS CONVERSION**
Convert SDI IN to HDMI OUT or HDMI IN to SDI OUT.



MONITOR START UP

After you connect to a power source, follow the on-screen instructions to complete the startup process. To exit the thumbstick training, hit the back button.

ACTIVATE YOUR MONITOR

After exiting thumbstick training, your 12-digit ID will appear. Follow the instructions to complete online registration and activate your warranty at: activate.smallhd.com

STAY UP TO DATE

To access the most recent firmware visit: www.smallhd.com/support/#firmware