

7" X 2 HD/SD TFT LCD MONITOR TLM-702HD



FEATURES

- 2 x 7" 16:9 Wide Screen Panels
- Resolution: 800 x 480 Pixels
- View Angle (V)+60/-40°, (H)+60/-60°
- HD/SD-SDI, HD-YPbPr, YUV, CV, HDMI inputs
- Internal colour bars
- Blue only function
- Embedded Audio indicator for SDI & HDMI signals
- Safe Area indicator
- VITC time code display
- Dual colour tally light indicator
- Brightness, Contrast, Colour, Tint Adjustable
- Audio Level indicators
- NTSC / PAL Auto switching
- 4:3 / 16:9 switchable

FEATURES

Safe area indicator 4:3 & 16:9



Support for time code



Audio monitor & audio level indicator




Blue only function



Colour temperature, standard plus user defined configuration.



REAR VIEW

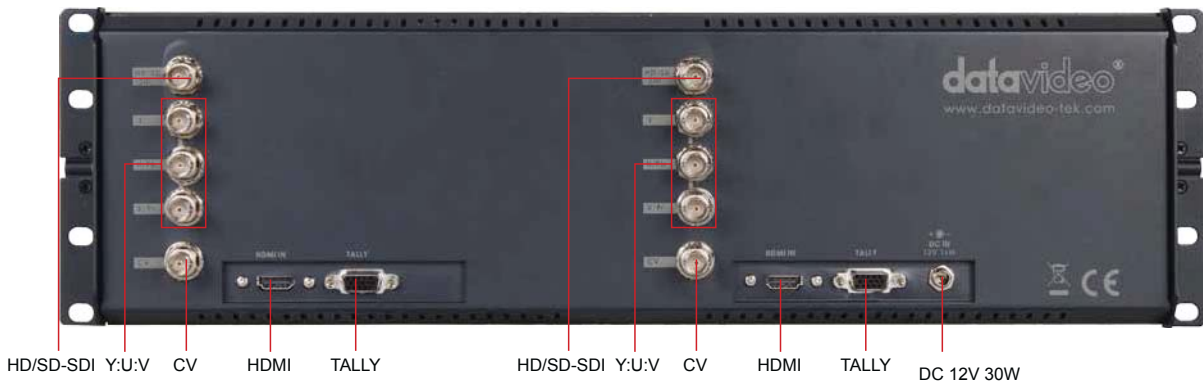

SPECIFICATIONS

LCD COMPARISON TABLE

									
Screen	TLM-170P	TLM-170H/HM/HR	TLM-702HD	TLM-702	TLM-700HD	TLM-700	TLM-434H	TLM-404H	TLM-430
Chassis	1 x 17.3" * Tabletop * Tilttable Screen	1 x 17.3" Back-Lit LED * Tabletop (170H) * 1U Rack Pull-Out (HM) * 7U Rack Face-Mount (HR)	2 x 7" LCD/Back-Lit LED 3U Rack Mount	2 x 7" TFT LCD 3U Rack Mount	1 x 7" Back-Lit LED 1/4 - 20" Thread Hole Mount	1 x 7" TFT LCD 1/4 - 20" Thread Hole Mount	4 x 4.3" TFT LCD 2U Rack Mount	4 x 4.3" TFT LCD 2U Rack Mount	1 x 4.3" TFT LCD 1/4 - 20" Thread Hole Mount
Resolution	1920x1080	1600x900	800x480	480x234	800x480	480x234	480x272	320x234	480x272
Video Inputs	2 x HDMI, 2 x 3G/HD/SD-SDI, 1 x S-Video, 1 x Component YUV, 2 x Composite Video	2 x Composite Video, 1 x S-Video, 4 x HD/SD-SDI, 1 x HD Component YUV, 1 x HD/SD-SDI, 2 x HDMI	2 x HD Component 2 2x HD/SD-SDI, YUV, 2 x HDMI, 2 x Composite Video	4 x Composite Video	1 x Composite Video, 1 x HD/SD-SDI, 1 x HD Component YUV, 1 x HDMI	2 x Composite Video	4 x HD/SD-SDI, 4 x HDMI	4 x Composite Video	2 x Composite Video
Loop Through	1 x 3G/HD/SD-SDI, 2 x Composite Video	1 x HD/SD-SDI	N/A	4 x Composite Video	N/A	N/A	4 x HD/SD-SDI	4 x Composite Video	N/A
Supported Input Resolutions	1080p (23.98/24/25/30/50/59.95/60Hz), 1080i (50/59.94/60Hz), 1280x720p (50/59.94/60 Hz), 720x480i (NTSC), 720x576i (PAL)	1920x1080i (50/60Hz), 1280x720p (50/60 Hz), 720x480i (NTSC), 720x576i (PAL)	1920x1080i (50/60Hz), 1280x720p (50/60 Hz), 720x480i (NTSC), 720x576i (PAL)	720x480i (NTSC), 720x576i (PAL)	1920x1080i (50/60Hz), 1280x720p (50/60 Hz), 720x480i (NTSC), 720x576i (PAL)	720x480i (NTSC), 720x576i (PAL)	1920x1080i (50/60Hz), 1280x720p (50/60 Hz), 720x480i (NTSC), 720x576i (PAL)	720x480i (NTSC), 720x576i (PAL)	720x480i (NTSC), 720x576i (PAL)
Aspect Ratio	16:9, 4:3	16:10, 16:9, 4:3	16:9, 15:9, 4:3	16:9, 4:3	16:9, 15:9, 4:3	16:9, 4:3	16:9, 4:3	4:3	16:9, 4:3
NTSC/PAL Tally	Auto-Detect Live (Red) / Cued (Amber)	Auto-Detect Live (Red) / Cued (Amber)	Auto-Detect Live (Red) / Cued (Amber)	Auto-Detect Live (Red) / Cued (Amber)	Auto-Detect Live (Red) / Cued (Amber)	Auto-Detect Live (Red) / Cued (Amber)	Auto-Detect Live (Red) / Cued (Amber)	Auto-Detect Three-Color Indicator (green/red/yellow)	Auto-Detect Big Tally Light
Audio	* Plays Embedded Audio in 3G/HD/SD-SDI and HDMI * 4 x Mono RCA Inputs * Stereo Speakers	* Plays Embedded Audio in HD/SD-SDI and HDMI * 4 x Mono RCA Inputs * Stereo Speakers	* Audio Presence Indicator * Audio Level Meter * 2 x Stereo Headphone Mini Jack	N/A	* Audio Presence Indicator * Audio Level Meter * Stereo Headphone Mini Jack	N/A	* 4 x Stereo Headphone Mini Jacks * Embedded Audio Peak Meter	N/A	N/A
Special Features	* 3G-SDI Support * Picture-in-Picture * Blue Only * Audio Level Indicator * Safe Frame	* Available in Tabletop (H), 1U Pull-Out (HM), or 7U Face-Mounted (HR) Models * Picture-in-Picture * Blue Only * Audio Level Indicator	* Blue Only * Safe Frame * VITC Time Code Display	* Dual Screens * Dual Inputs and Dual Loop-Throughs per Screen	* Blue Only * Safe Frame * VITC Time Code Display * Can Use Batteries (Not Included) as Power Source	* Carrying Case Included * Sunshade Included	* Blue Only * Embedded Time Code Indicator * Safe Frame	4 x Screens, each with its own loop-through	* Can powered by DC adaptor; Sony batteries or D-TAP. * TLM-43LB Camera look back system (with RMC-200 and control cable)
Consumption	DC 12V, 30 watts	DC 12V, 15 watts	DC 12V, 30 watts	DC 12V, 12 watts	DC 12V, 18 watts	DC 12V, 6 watts	DC 12V, 15 watts	DC 12V, 15 watts	DC 12V, 6 watts