

DENSITRON


# UREADY 2RU MONITOR

2RU 19" Rack mount ready TFT display with capacitive touch for Broadcast applications.

It can be used for signal and picture monitoring, or a control system with the help of multitouch PCT, or a combination of both. Densitron provides a 16.3" high resolution (1920 x 285) display, which allows multiple video picture monitors and audio level displays – side-by-side.

Projected Capacitive Touch functionality allows the device to be interactive. Common signal interfaces, such as: Display port, DVI and VGA are used for video signals; and USB for touch screen.

UReady™

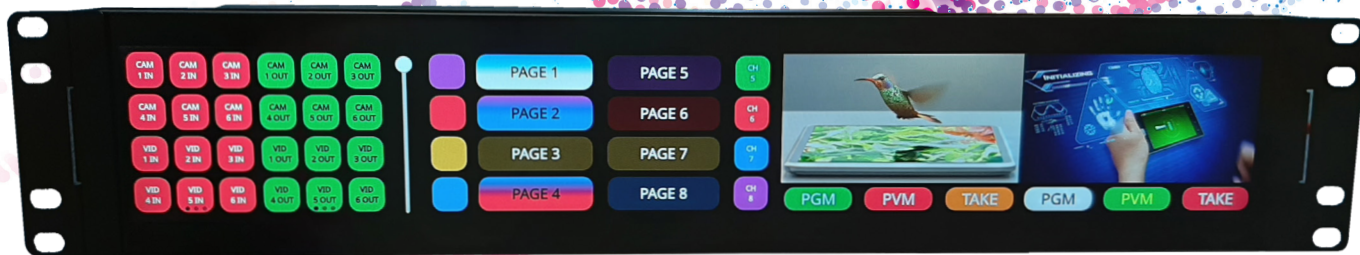

UREADY

2RU MONITOR

SKU: DM-163BD-MPGR06

Densitron 16.3" monitor with a resolution of 1920 x 285.

## DISPLAY

Display size	16.3"
Resolution	1920 x 285
Viewing Angle	89/89/89/89

## DIMENSIONS

Width	480mm
Height	87.60mm

## HMI

HMI	Standard Touch
Touch Interface	USB

## MOUNTING AND CONNECTIVITY

I/O	DVI-D, DP, VGA
Mechanical Mounting	Rack Mount

Available with the following customisation options:



Cover Lens Customisation



Optical Bonding



Embedded solutions



Mechanical buttons



Tactile Technology



## PANEL

Size	16.3" TFT LCD
Pixels per inch	119
Brightness	700cd/m2
Contrast Ratio	1000: 1 (Typ.)
LED Backlight	50,000 Hours
Power	1 x 12V DC input
Operating Temperature	0°C to +50°C

## TOUCH

Type	PCT
Fingers	Fingers Multiple touch > 10

