


LEDGO

LEDGO TECHNOLOGY LIMITED

2018 Catalogue



www.ledgo.co.uk



LEDGO, More Than a Light!

CONTENTS

LED RGB Studio Light.....	01 - 04
LED Fresnel Light.....	05 - 10
Ultra-matte LED Studio Light.....	11 - 14
Versatile LED Light.....	15 - 18
Studio Stream.....	19 - 22
Value LED Studio Light.....	23 - 24
LED Ring Light	25 - 26
Professional Green Screen Studio Kit.....	27 - 28
LED Pad Light	29 - 30
On Camera LED Lights	31 - 34
Portable Cases	35
Accessories	36


Magic

LG-G

Bi-color, RGB, RGB



Color Chase



Candle



Soft Disco



Hard Disco

chue

260

3W and Tungsten



Cop Car



Storm



Monitor



Multi Flash



LIGHTING FEATURES

MagicHue

Four lighting modes available: CCT 2700K-7500K, RGB, RGBW and Tungsten.

Control with 2.4G remote, WiFi APP, OMX and Manual Dimmer.

Seven lighting effects available: Storm, Cop Car, Candle Light, Hard Disco, Soft Disco, Monitor, Multi Flash. Extra lighting effects for matching Sodium vapour light, Metal halide light, Fluorescent light and Street light. Power available in AC or two Sony V-lock batteries. With durable aluminum housing and a low dB fan for cooling system.

Built-in customized situation modes to meet the needs of different shooting scenarios.

LG-G260

CRI(Ra): 95

Power: 260W

Power Source: 48V5.8A DC, 100-240V AC

Color Temperature: 2700K-7500K

Illumination(LM): 2700K: 15887LM 7500K:18617LM

Illumination(LUX): 2700K: 5457LUX@1M 7500K: 6338LUX@1M

Brightness Control: WiFi APP, 2.4G, OMX and Dimmer

Dimensions: 858*613*148MM

Weight: 11KG

LG-G160

CRI(Ra): 95

Power: 160W

Power Source: 48V 3.34A, 100-240V AC, Sony-V-lock battery

Color Temperature: 2700K-7500K

Illumination(LM): 2700K: 9760LM 7500K:10880LM

Illumination(LUX): 2700K: 4530LUX@1M; 563LUX@3M; 218LUX@5M,
7500K: 5650LUX@1M; 698LUX@3M; 273LUX@5M

Brightness Control: WiFi APP, 2.4G, DMX and Dimmer

Dimensions: 548*609*148MM

Weight: 6.7KG

CONFIGURATIONS:



Flight Case



Barndoors



Adapter + Cord




Honeycomb Grid



WiFi-2 4G Transfer Device

ACCESSORIES:

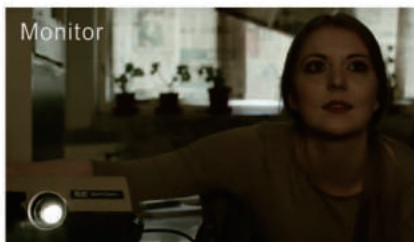

MagicHue's amazing lighting effects make it easier and faster to match a location light source, adopt separate buttons for controlling menu list, can simply from the list.

LED Fresnel Light

CRI 95

High efficiency COB LED

Low power consumption

Passive air cooling for silent operation

Flicker free, 0-100% step less adjustable brightness control

Adjustable beam angle

WiFi App, 2.4G remote, DMX and manual
dimmer control



LG-D1200M

CRI(Ra): 95

Power: 120W

Power Source: Input 100-240V Output 24v 6.6A

Colour Temperature: 5600K

Illumination(LM): 7980LM


Illumination(LUX): Spot 9° : 53979 LUX@1M

Flood 46° : 10256 LUX@1M

Brightness Control: WiFi, 2.4G, DMX and Dimmer


Dimensions: 390*230*190MM

Weight: approx. 5.2KG

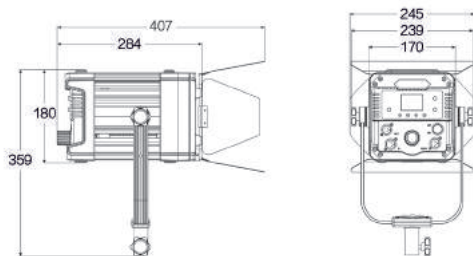

LEDGO

LEDGO RA:95

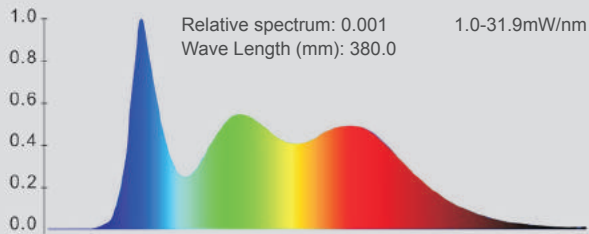


CCT=D5770(-0.7)


TLCL-2012:96(D770)

EBU:TLCI-2012

NBK-Oc

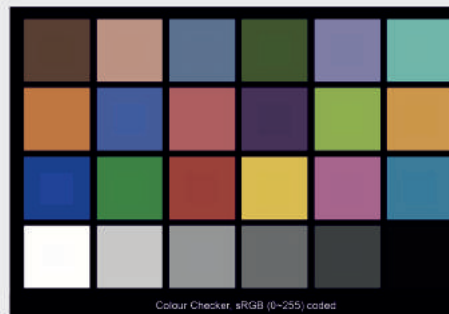

Sector	Lightness	Chroma	Hue
R	0	0	0
R/Y	0	0	0
Y	0	0	0
Y/G	0	0	0
G	0	0	0
G/C	0	0	0
C	0	0	0
C/B	0	0	0
B	0	0	0
B/M	0	0	0
M	0	0	0
M/R	0	0	0



The new highly efficient 5600K LED Fresnel light from LEDGO gives you incredible flexibility by acting as either a spot or flood light. Built to take a beating. Because it's from LEDGO you know you're going to get great value and reliability. Available in 30, 60, 120, 300 and 450 watt versions.



LG-D300

CRI(Ra): 95
Power: 30W
Power Source: Input 100-240V Output 15v 3A
Colour Temperature: 5600K
Illumination(LM): 1995LM
Illumination(LUX): Spot 10° : 9413 LUX@1M
Flood 40° : 2310 LUX@1M
Brightness Control: WiFi, 2.4G and Dimmer
Dimensions: 160*260*135MM
Weight: approx. 2.5KG



LG-D600

Available as part of a Location Kit

CRI(Ra): 95
Power: 60W
Power Source: Input 100-240V Output 15v 6A
Colour Temperature: 5600K
Illumination(LM): 3990LM
Illumination(LUX): Spot 10° : 23553 LUX@1M
Flood 38° : 4997 LUX@1M
Brightness Control: WiFi, 2.4G and Dimmer
Dimensions: 170*280*145MM
Weight: approx. 3.1KG



LG-D1200

CRI(Ra): 95
Power: 120W
Power Source: Input 100-240V Output 24v 6.6A
Colour Temperature: 5600K
Illumination(LM): 7980LM
Illumination(LUX): Spot 9° : 53979 LUX@1M
Flood 46° : 10256 LUX@1M
Brightness Control: WiFi, 2.4G and Dimmer
Dimensions: 390*230*190MM
Weight: approx. 5.2KG

WiFi App 2.4G remote, DMX and manual dimmer control
Passive air cooling for silent operation
Low power consumption





LEDGO

LG-D3000M

CRI(Ra): 95
Power: 300W
Power Source: Input 100-240V Output 54v 5.95A
Colour Temperature: 5600K
Illumination(LM): 17100LM
Illumination(LUX): Spot 8° : 74354 LUX@1M
Flood 46° : 18327 LUX@1M
Brightness Control: WiFi, 2.4G, DMX and Dimmer
Dimensions: 565*440*341MM
Weight: approx. 15.7KG

LG-D4500M

CRI(Ra): 95
Power: 450W
Power Source: Input 100-240V Output 54v 4.45A*2
Colour Temperature: 5600K
Illumination(LM): 24300LM
Illumination(LUX): Spot 10° : 138554 LUX@1M
Flood 44° : 27535 LUX@1M
Brightness Control: WiFi, 2.4G, DMX and Dimmer
Dimensions: 610*490*371MM
Weight: approx. 20KG

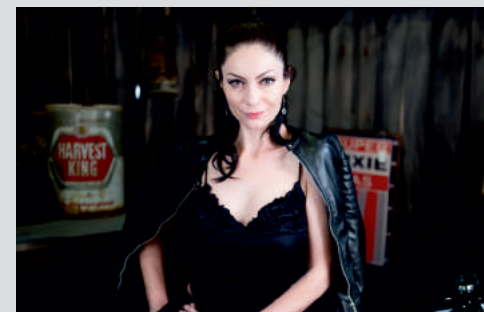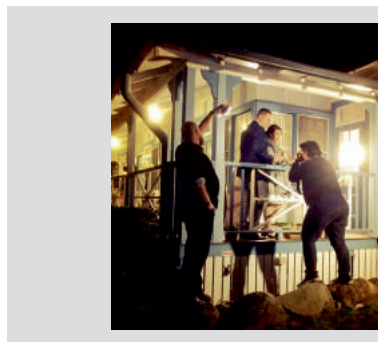

On Camera LED Fresnel Light

KEY FEATURES

High CRI

Adjustable focusing

Low power consumption, high brightness

Flicker free, 0 - 100% brightness step less adjustable

LG-24F

CRI(Ra): 95

Power: 8W

Power Source: 7.2 - 12V DC, 100 - 240VAC

Colour Temperature: 5600K

Illumination (LM): 560LM

Illumination (LUX): Spot: 1920LUX@1M; Flood: 465LUX@1M

Brightness Control: Step less adjustment from 0% to 100%

Dimensions: 165*135*80MM

Weight: approx. 0.3KG




Technical parameters

Model No.	Power	Illumination (LM)	Colour Temperature	Angle	1M	2M	3M	4M	5M	CRI (Ra)	R9	R15	TLCI (Qa)
LG-D4500M	450	24300	5600K	spot 10°	138554	33213	14759	8181	5314	97	95	95	97.2
				flood 44°	27535	7079	3243	1916	1280				
LG-D3000M	300	17100	5600K	spot 8°	74354	24621	11354	6556	4340	97	90	95	97.3
				flood 30°	25750	7420	3470	2007	1320				
				flood 46°	18327	4724	2185	1273	855				
LG-D1200M	120	7980	5600K	spot 9°	53979	12023	5117	2852	1835	95	90	94	94.4
				flood 30°	11810	3244	1466	835	546				
				flood 46°	10256	2789	1245	730	482				
LG-D1200	120	7980	5600K	spot 9°	53979	12023	5117	2852	1835	95	90	94	94.4
				flood 30°	11810	3244	1466	835	546				
				flood 46°	10256	2789	1245	730	482				
LG-D1200MC	120	7159	5600K	spot 18°	10630	6588	1117	626	399	96	91	95	95.4
				flood 50°	3679	950	421	238	155				
		5643	3200K	spot 18°	9158	2207	985	545	351				
				flood 50°	3162	783	359	206	136				
LG-D600	60	3990	5600K	spot 10°	23553	5996	2465	1372	868	96	94	94	95.4
				flood 30°	6590	1808	813	466	305				
				flood 38°	4997	1347	601	341	225				
LG-D300	30	1995	5600K	spot 10°	9413	2259	974	546	345	97	94	96	96.2
				flood 40°	2310	614	280	162	106				
LG-24F	8	560	5600K	spot	1920	500	220	130	80	95	94	94	94.6
				flood	465	120	54	31	20				

LEDGO



A close-up portrait of a woman with dark hair and light eyes, looking upwards and to the right. She is wearing a thick white fur collar. The lighting is soft and directional, coming from the left, which is where a portion of a studio light is visible. The background is dark and out of focus.

LED Studio Light

Ultra thin · Ultra soft lighting

LEDGO's innovative LED panel lights LG-T1440MC/T2880LMC are soft, cool operating, bi-colour, flicker free, perfect for studios, and controlled manually with DMX or WiFi App. The thickness of the light is just 27mm can be mounted to light stands and can rotate 360°.





LG-T1440MC

CRI(Ra): 95
Power: 144W
Power Source: 24V DC, 100-240V AC
Colour Temperature: 3200K-5600K
Illumination(LM): 11628LM
Illumination(LUX): 5600K; 2170LUX@1M; 3200K: 2229LUX@1M
Brightness Control: WiFi, 2.4G, DMX and Dimmer
Dimensions: 710*330*27MM
Weight: approx. 5.5KG

LG-T2880LMC

CRI(Ra): 95
Power: 288W
Power Source: 24V DC, 100-240V AC
Colour Temperature: 3200K-5600K
Illumination(LM): 23256LM
Illumination(LUX): 5600K; 4372LUX@1M; 3200K: 4053LUX@1M
Brightness Control: WiFi, 2.4G and Dimmer
Dimensions: 1375*330*27MM
Weight: approx. 11KG



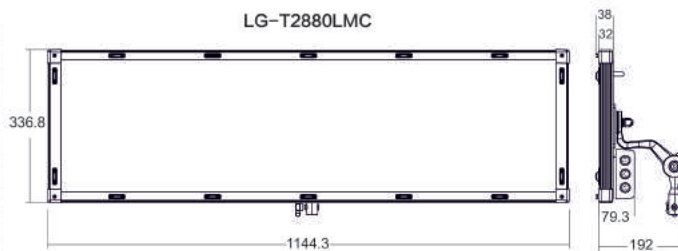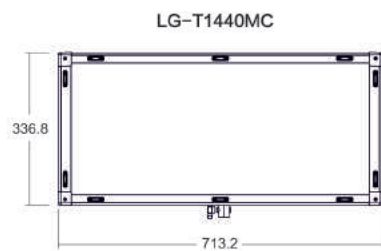

ACCESSORIES:



Honeycomb Grid



2.4G Remote Control




WiFi-2.4G Transfer Device



Barn doors



Adapter + Cord

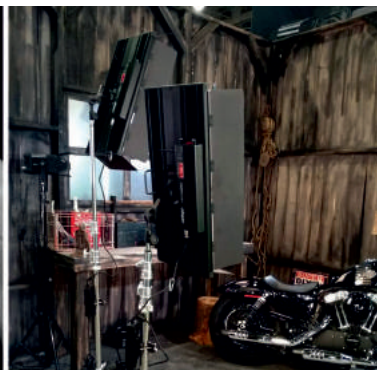

LEDGO



Versatile


WiFi App 2.4G Remote Control



Flexible




Waterproof



>95
RA 95




Dimmer



Bi-color




Lithium
batteries

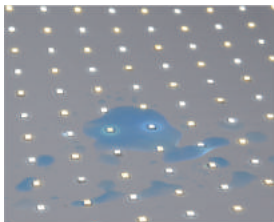


Waterproof

The best choice for rainy day shooting



1 kit, 2 kit
External battery
supplies electricity

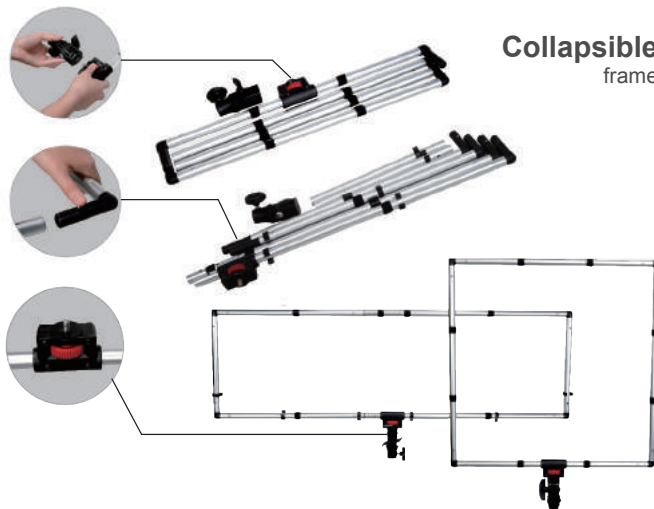

Collapsible
frame

Foldable and Flexible



Why VERSATILE?

- One light, two lights, four lights, light as a feather
- Flexible design
- Low profile
- Adjustable colour
- Battery option and water resistant for ultimate portability
- Soft, large tiles for beautiful wrapping lighting
- Strip or square configurations
- 95 CRI for uncompromised output
- LEDGO quality and value

The LEDGO Versatile is the most Versatile portable lighting kit.



LG-V58C is a multi-use light available in 1, 2 or 4 light kit variations



LG-V58C1K1

CRI(Ra): 95
Power: 28.8W
Power Source: 15V DC, Sony V-lock battery
Colour Temperature: 3200K-5600K
Illumination(LM): 2382LM
Illumination(LUX): 5600K: 675LUX@1M, 3200K: 652LUX@1M
Brightness Control: WiFi, 2.4G and Dimmer
Dimensions: 600*350*20MM (Rectangle frame)
Weight: approx. 5.2KG

LG-V58C2K1

CRI(Ra): 95
Power: 28.8*2W
Power Source: 15V DC, Sony V-lock battery
Colour Temperature: 3200K-5600K
Illumination(LM): 4815LM
Illumination(LUX): 5600K: 1352LUX@1M, 3200K: 1351LUX@1M
Brightness Control: WiFi, 2.4G and Dimmer
Dimensions: 1120*350*20MM (Rectangle frame)
Weight: approx. 7KG

LG-V58C2K2

CRI(Ra): 95
Power: 28.8*2W
Power Source: 15V DC, Sony V-lock battery
Colour Temperature: 3200K-5600K
Illumination(LM): 4815LM
Illumination(LUX): 5600K: 1690LUX@1M, 3200K: 1694LUX@1M
Brightness Control: WiFi, 2.4G and Dimmer
Dimensions: 600*600*20MM (Rectangle frame)
Weight: approx. 7KG

LG-V58C4K1

CRI(Ra): 95
Power: 115.2W
Power Source: 15V DC, Sony V-lock battery
Colour Temperature: 3200K-5600K
Illumination(LM): 9630LM
Illumination(LUX): 5600K: 2914LUX@1M, 3200K: 2930LUX@1M
Brightness Control: WiFi, 2.4G and Dimmer
Dimensions: 1120*600*20MM (Rectangle frame)
Weight: approx. 8KG



LEDGO

Studio Stream

Bi-color 2700K-7500K

WiFi APP, 2.4G Remote and DMX

The LEDGO Broadcast Series of LED Panels was designed for the rigors of daily, professional use. Improved color accuracy, integrated DMX and WiFi control, and a robust housing makes the LEDGO Broadcast Series of LED Panels a perfect fit for any professional studio.




LG-S150M

CRI(Ra):95
 Power: 150W
 Power Source: 48V DC 3.34A, 100-240V AC,
 Sony V-lock battery
 Color Temperature: 5600K
 Illumination(LM): 12728LM
 Illumination(LUX): 5600K: 5840LUX@1M
 Brightness Control: WiFi APP, 2.4G, DMX and dimmer
 Dimension: 548mm*609mm*148mm
 Weight: about 6.7kg

LG-S150MC

CRI(Ra):95
 Power: 150W
 Power Source: 48V DC 3.34A, 100-240V AC,
 Sony V-lock battery
 Color Temperature: 2700K-7500K
 Illumination(LM): 12122LM
 Illumination(LUX): 2700K: 4 788LUX@1M
 7500K: 5412LUX@1 M
 Brightness Control: WiFi APP, 2.4G, OMX and dimmer
 Dimension: 548mm*609mm*148mm
 Weight: about 6.7kg

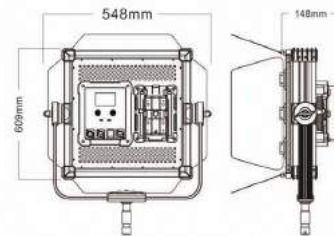

Technical parameters

Model No.	Power (W)	TILCI	RA	Illumination (LM)	Colour Temperature	1M (Lux)	2M (Lux)	3M (Lux)	4M (Lux)	5M (Lux)
LG-S150M	50	93	95	12728	5600K	4631	1233	570	340	228
LG-S150MC	50			12122	7500K	5412	1354	617	365	246
					5600K	5667	1431	654	384	259
					3200K	4865	1230	557	329	224
					2700K	4788	1178	532	313	210
LG-S280M	280			21736	5600K	9100	2340	1089	639	429
LG-S280MC	280			20649	7500K	9698	2425	1105	652	439
					5600K	10140	2563	1172	686	462
					3200K	8710	2204	998	587	400
					2700K	8580	2111	951	559	374
LG-S560M	560			46810	5600K	18200	4680	2178	1279	858
LG-S560MC	560			44470	7500K	19396	4851	2210	1305	878
					5600K	20280	5127	2345	1372	925
					3200K	17420	4409	1996	1175	800
					2700K	17160	4222	1903	1118	748

CONFIGURATIONS:



Barndoors



Adapter + Cord

OPTIONAL ACCESSORIES:



Honeycomb Grid



2.4G
Remote Controller



DMX cable



WiFi - 2.4G
Transfer Device

New Version - StudioStream Series

The LEDGO StudioStream is top technical in LEDGO Broadcast Series Panel light. High brightness, silent running with passive air cooling, 120° wide light dispersion, unmatched color fidelity with a TLCI rating of 94+ and Ra95+.

LEDGO offers 150W soft lights for broadcast, TV and film lighting. Compared with the traditional LED bulbs, the light source can achieve an ultra-softer effect with this Professional Soft-light series. The new technology subverts the tradition and makes uniform lighting output without adding extra diffuser materials. Present the clean light perfectly with a single soft shadow, ensure a subject appear more beautiful or youthful through making wrinkles less visible.



LED Studio Light

Value Series



Photo by Frank Doorhof



LG-600SC

Available as part of a Location Kit

CRI(Ra): 95
Power: 36W
Power Source: 12-16.8V DC, 100 - 240V AC, Sony V-lock battery
Colour Temperature: 3200K-5600K
Illumination(LM): 4320LM
Illumination(LUX): 5658LUX@1M
Brightness Control: WiFi, 2.4G and Dimmer
Dimensions: 375*284*73MM
Weight: approx. 2KG



LG-600CSC

Available as part of a Location Kit

CRI(Ra): 95
Power: 36W
Power Source: 12-16.8V DC, 100 - 240V AC, Sony V-lock battery
Colour Temperature: 3200K-5600K
Illumination(LM): 4620LM
Illumination(LUX): 5915LUX@1M
Brightness Control: WiFi, 2.4G and Dimmer
Dimensions: 375*284*73MM
Weight: approx. 2KG

LG-900SC

Available as part of a Location Kit

CRI(Ra): 95
Power: 54W
Power Source: 12-16.8V DC, 100 - 240V AC, Sony V-lock battery
Colour Temperature: 3200K-5600K
Illumination(LM): 6480LM
Illumination(LUX): 8595LUX@1M
Brightness Control: WiFi, 2.4G and Dimmer
Dimensions: 425*284*73MM
Weight: approx. 3KG

LG-900CSC

Available as part of a Location Kit

CRI(Ra): 95
Power: 54W
Power Source: 12-16.8V DC, 100 - 240V AC, Sony V-lock battery
Colour Temperature: 3200K-5600K
Illumination(LM): 6930LM
Illumination(LUX): 8900LUX@1M
Brightness Control: WiFi, 2.4G and Dimmer
Dimensions: 425*284*73MM
Weight: approx. 3KG

LEDGO Value Series Bi-colour LED Panel 1200 is 72W square light panel that allows you to fine tune the colour of your light anywhere from 3200K to 5600K and generates 9216LM producing 11798LUX@1M.

LG-1200SC

Available as part of a Location Kit

CRI(Ra): 95
Power: 72W
Power Source: 12-16.8V DC, 100 - 240V AC, V-lock battery
Colour Temperature: 3200K-5600K
Illumination(LM): 9120LM
Illumination(LUX): 11786 LUX@1M
Brightness Control: WiFi, 2.4G and Dimmer
Dimensions: 475*284*73MM
Weight: approx. 4KG

Configurations




LG-1200CSC

Available as part of a Location Kit

CRI(Ra): 95
Power: 72W
Power Source: 12-16.8V DC, 100 - 240V AC, V-lock battery
Colour Temperature: 3200K-5600K
Illumination(LM): 9216LM
Illumination(LUX): 11798 LUX@1M
Brightness Control: WiFi, 2.4G and Dimmer
Dimensions: 475*284*73MM
Weight: approx. 4KG

Optional Accessories





**Ultra Soft
LED Ring Light**

LG-R320C ultra soft LED Ring Light. Bi-colour and adjustable brightness.

Built in handle, usable with 2 Sony NPF750 batteries.

Controllable by WiFi App 2.4G remote.

LG-R320C

CRI(Ra): 95

Power: 32W

Power Source: 15V DC, Sony NP-F750/970 battery

Colour Temperature: 3200K-5600K



Illumination(LM): 2193LM

Illumination(LUX): 545 LUX@1M

Brightness Control: WiFi, 2.4G and Dimmer

Dimensions: 305MM inside diameter, 465MM outside diameter

Weight: approx. 1.9KG

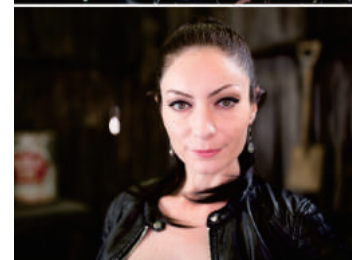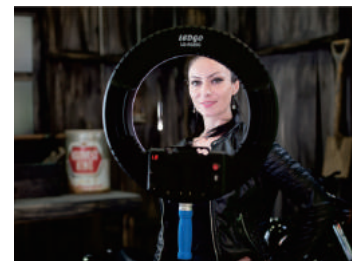

The LG-R332 LED video light features a daylight balanced and high CRI LED light that meets every videographer's demands.

LG-R332

CRI(Ra): 95

Power: 20W

Power Source: 7.2-12V DC, 100 - 240V AC

Colour Temperature: 5600K

Illumination(LM): 2470LM

Illumination(LUX): 2220 LUX@1M

Brightness Control: Dimmer

Dimensions: 271*44*222MM

Weight: approx. 0.75KG



Professional Green Screen Studio Series



L shape LG-2022U
2.2m (H) * 2m (W)

The LEDGO green screens pair perfectly with the LED strip lights. The lights' power can be supplied by battery or power adapter. Lights can be linked together to run off only one power adapter. Green screens can be set up in minutes.

LG-E60

CRI(Ra): 95

Power: 12W

Power Source: 15V DC/100-240V AC, 18650 battery

Colour Temperature: 5600K

Illumination(LM): 969LM

Illumination(LUX): 300 LUX@1M

Brightness Control: ON-OFF switch

Dimensions: 600*65*55*MM

Weight: approx. 0.5KG




Configurations:

1- LEDGO LED Green Screen Strip Light

1- AC Power Adapter

INSTALLATION:



LG-2022L L-Frame Green Screen Kit

1 - Aluminium L-Shaped Green Screen Frame

1 - Chroma Green Background Cloth

1 - Nylon Carry Case



LEDGO

The LG-E268C/LG-E116C LED pad light, is ultra soft with variable colour temperature from 3200K to 5600K and flicker free. The light is very bright and soft. With wireless control by APP systems and 2.4G remote control, it's the best choice for babies, weddings and interviews.



WiFi App control

2.4G remote control

LG-E268C LED PAD LIGHT

Bi-colour, Ultra soft, Ultra thin

LG-E116C LED PAD LIGHT

Bi-colour, Ultra soft, Ultra thin

- WiFi App 2.4G remote and button control
- Professional digital display screen to show colour temperature
- WiFi channel and power level
- Bi-colour: button control from 3200K to 5600K
- Brightness and colour temperature control
- Powered by battery or AC adapter



LG-E116C

Power: 11.5W

Power Source: 15V DC, Sony NP-F750/970 Battery

Colour Temperature: 3200K-5600K

Illumination(LM): 666LM

Illumination(LUX): 750 LUX@0.5M

Brightness Control: WiFi, 2.4G and Dimmer


Dimensions: 173*118*15*MM

Weight: approx. 0.23KG



Portable LED Video Lights

1. Portable design, ideal for mobile studios.
2. Multiple mounting options: nut 1/4 in-mount, handle mount and tripod mount.
3. Use 7.4V battery or 7-12V AC power adapter.
4. Quick setup, easy and simple to bright light.
5. Adjustable brightness for use as a key or a fill light.

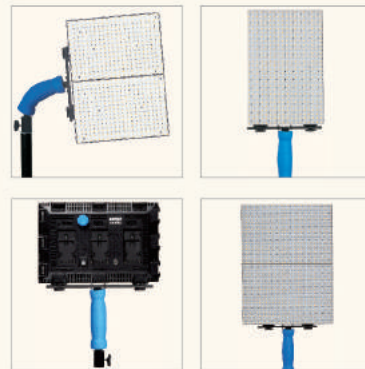



On Camera Led Lights

The LEDGO line of On-Camera LED Panels has raised the bar for portable location lighting. With a 90+ CRI rating, unparalleled light output and an interlocking modular design, LEDGO On-Camera LED's allow you to customise your light source to fit your needs. The four light kit combines four of our 9W LED On Camera Lights to give you a wide range of lighting options. Take advantage of the modular design to create a single light source of 4,680 Lumens, or use them as four different light sources to add depth and dimension to your shots. The 4-head kit gives you the versatility to create a very diverse range of lighting effects.

LG-B150

Available as part of a Reporter Kit

CRI(Ra): 95
Power: 9W
Power Source: 7.2-12V DC, 100-240V AC
Colour Temperature: 5600K
Illumination(LM): 1593LM
Illumination(LUX): 7007 LUX@1M
Brightness Control: Dimmer
Dimensions: 143*44*95MM
Weight: approx. 0.2KG



LG-B160S

Available as part of a Reporter Kit

CRI(Ra): 95
Power: 9.6W
Power Source: 12V DC
Sony NP-F - Panasonic CGR-D - AA - NI-MH
Colour Temperature: 5600K
Illumination(LM): 1053.1LM
Illumination(LUX): 1M: 1120, 2M 290, 3M 133, 4M 76, 5M
Brightness Control: Dimmer
Dimensions: 250*70*55MM
Weight: approx. 0.325KG



LG-B160C

Available as part of a Reporter Kit

CRI(Ra): 95
Power: 9.6W
Power Source: 7.2-12V DC, 100-240V AC
Colour Temperature: 3200-5600K
Illumination(LM): 1186LM
Illumination(LUX): 6662 LUX@0.5M
Brightness Control: Dimmer
Dimensions: 152*50*101MM
Weight: approx. 0.3KG



LG-B168S

CRI(Ra): 95
Power: 10W
Power Source: 7.2-12V DC
Sony NP-F - Panasonic CGR-D - AA - NI-MH
Colour Temperature: 5600K
Illumination(LM): 1060.6LM
Illumination(LUX): 1M: 1500, 2M 290, 3M 130, 4M 80, 5M
Brightness Control: Dimmer
Dimensions: 230*65*50MM
Weight: approx. 0.325KG



LG-B308

Available as part of a Reporter Kit

CRI(Ra): 95
Power: 18.5W
Power Source: 7.2-12V DC, 100-240V AC
Colour Temperature: 5600K
Illumination(LM): 2285LM
Illumination(LUX): 11392 LUX@0.5M
Brightness Control: Dimmer
Dimensions: 209*59*140MM
Weight: approx. 0.6KG



LG-B560

CRI(Ra): 95
Power: 33.6W
Power Source: 7.2-12V DC, 100-240V AC
Colour Temperature: 5600K
Illumination(LM): 4150LM
Illumination(LUX): 4300 LUX@1M
Brightness Control: Dimmer
Dimensions: 280*180*48MM
Weight: approx. 1KG



LG-B308C

Available as part of a Reporter Kit

CRI(Ra): 95
Power: 18.5W
Power Source: 7.2-12V DC, 100-240V AC
Colour Temperature: 3200-5600K
Illumination(LM): 2427LM
Illumination(LUX): 12221 LUX@0.5M
Brightness Control: Dimmer
Dimensions: 209*59*140MM
Weight: approx. 0.6KG



LG-B560C

CRI(Ra): 95
Power: 33.6W
Power Source: 7.2-12V DC, 100-240V AC
Colour Temperature: 3200-5600K
Illumination(LM): 3945LM
Illumination(LUX): 3110 LUX@1M
Brightness Control: Dimmer
Dimensions: 280*180*48MM
Weight: approx. 1KG



Portable Cases

Metal Trolley Case

LG-M3

Material: MDF, Metal

Dimensions: 62.1CM*46.8CM*51.3CM

Weight: approx. 16KG

Packed items:

3 sets of LED600 + 3pcs of LG-L216 or

3 sets of LED900 + 3pcs of LG-L216 or

3 sets of LED1200 + 3pcs of LG-216



Three Lamps Trolley Case

LG-S3

Material: Cloth, Plastic board

Dimensions: 110*43CM*25CM

Weight: approx. 7.6KG

Packed items:

3 sets of LED600 + 3pcs of LG-L216 or

3 sets of LED900 + 3pcs of LG-L216 or

3 sets of LED1200 + 3pcs of LG-216



LG-CC600

Holds LEDGO light stand and optional
VMount batteries / charger.

Internal dimensions (without foam):

520MM*465MM*80MM



LG-CC6002

Holds x2 lights, x2 stand and accessories
Shoulder strap or hand carried

LG-CC6003

Holds x3 lights, x3 stand and accessories
Shoulder strap or hand carried



Accessories

LG-L186

Portable Light Stand for LED Location Lighting
Folds to less than 50cm
Maximum height 185cm



LG-WIFICB

Wireless Channel: 512
Distance of control: 30M



LG-L280

Lighting stand for Flourescent / LED Studio Lights.
Max height: 1.8m
16mm | 5/8" Spigot



LG-15V

External battery base
For Sony NP-F series battery
Suitable for LED light with Sony V-lock socket



Soft Box for:

LG-600 series lights LG-900 series lights
LG-1200 series lights



Contact us now for more details on the LEDGO range of products



Distributed by Holdan Limited
Brookfield House
Brookfield Industrial Estate
Peakdale Road, Glossop
Derbyshire SK13 6LQ
United Kingdom
Phone: +44 (0)1457 851000
Email: sales@holdan.co.uk

www.ledgo.co.uk