


Instruction Sheet


◆ Extra Parameters:

LED Bulbs Amount: 150 pcs
Total Power: 9W
Voltage: DC7. 2V-12V
Color Temperature: 5600K/3200K

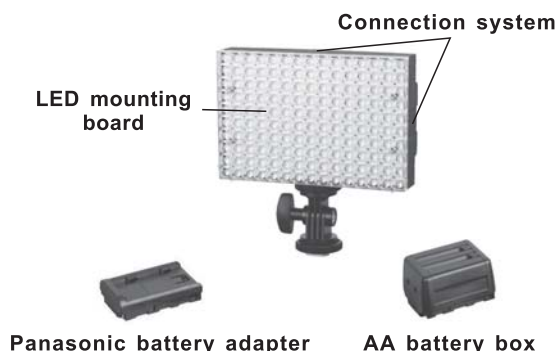


◆ Components:

1. Splice socket, Splicer: connect each product together seamlessly by Splice socket and Splicer.
2. Dimming Knob: For power ON-OFF and dimming, users can adjust light brightness as request when shooting under different circumstances.
3. Button for testing battery balance: When pressing the button, indicators will turn on to indicate the present power level.
4. Battery balance indicators: Power is at full level if all indicators turn on after pressing the button; less indicators on, lower power level, if no indicators on, battery need to be recharged or replaced.
5. DC Socket: DC input plug.
6. Power adapter: AC input, output DC. (Buy additionally)
7. Support of LED light: The support for LED lighting and hot shoe. meanwhile, it can be vertically and horizontally connection, and also could be mounted on light stand directly.
8. Hot Shoe Adapter: The hot shoe adapter is a fixture used to connect the LED Lighting and camera apparatus.
9. Fixing screw: screw is configured to adjust illumination direction of the LED Lighting.
10. Battery plate: Suitable for mounting Sony, Panasonic, or Canon battery.
11. Panasonic Battery Adapter: Special for Panasonic Li-ion battery.
12. Gels Holder: For packing the diffuser and filter.
13. AA battery box: Use for mounting AA battery, offer power for the lighting.
14. Carrying Bag: For packing the light and accesories
15. Filters: With diffuser, orange filter and magenta filter. Without diffuser and filter, light is of spotlight effect and suitable for shooting at a relatively long distance; with diffuser, light is of soft light effect; and with 3200K filter, the color temperature of light changes from 5600K to 3200K.

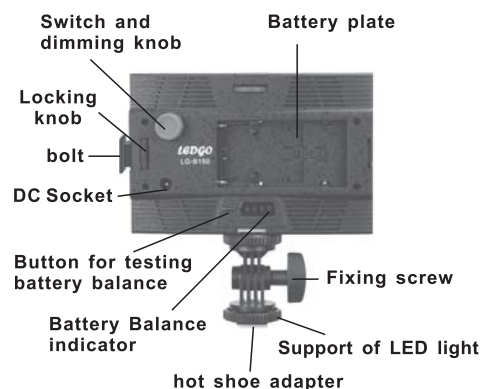

Carrying bag

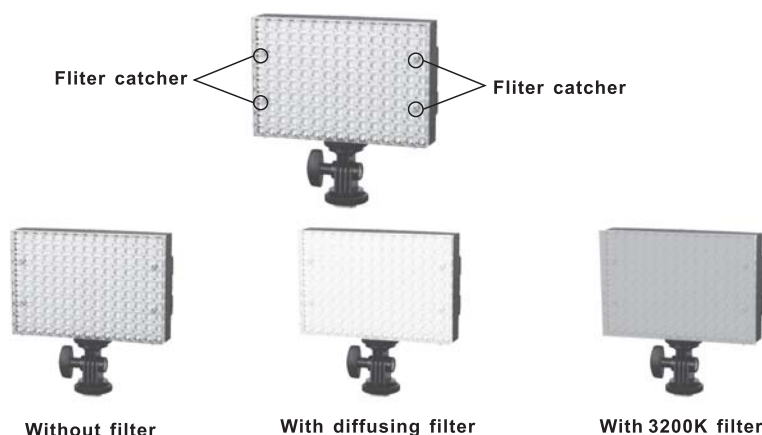

Without filter

With diffusing filter

With 3200K filter


● Built-up effect



Horizontal effect



Vertical effect



Studio light effect



◆ Instructions:

1. Install Battery: When installing Li-ion battery, please place Li-ion battery with correct side and direction in the battery holder and then press it evenly to make sure it is well installed. When installing Panasonic battery, the battery adapter must be mounted on the battery holder, so that the Panasonic battery can be installed. When installing AA battery, please make sure the positive and negative poles are correct positioned according to the "+" and "-" marks shown. After installing the battery, please check the battery power and make sure LED Lighting is workable.
2. When built-up, please loose the fixing screw of splicer, let the splicer to extend out (do not extend too much), if the light is with the filter, please take out the filter first, and then put the splicer of a light to splicer socket of another light (Attention: When build-up, please let the raised line to insert into the groove of the transparent square of another light), and then knob tight the fixing screw of the splicer, then it could be seamless connection with each other.
3. Insert the hot shoe adapter into the hot shoe of camera apparatus, screw the knob to fix the LED Lighting on camera apparatus.
4. Rotate the knob to turn on the LED Lighting and adjust light brightness. And illumination direction can also be adjusted through the fixing screws.
5. If need to change the light effect, please change the different filter.
6. Turn off the power after use.

◆ Notice:

1. Please turn off the power after use, in order to avoid waste of battery and longtime heat generation and further affect the service life of LED bulbs.
2. If power is supplied by 6pcs AA battery, please remove the battery when the LED Lighting is out of use, otherwise, the battery unused longtime will go moldy and rot the circuit inside the LED Lighting.
3. When the light is on, please do not look at the LEDs directly.
4. Please do not hold on the light to lift the DV or camera
5. Please install the battery gently, in order to avoid the battery plate damaged and out of shape
6. Please keep away from dampness.

LEDGO TECHNOLOGY LIMITED

Add: Zhanglin Section, Highway 324, Dongli, Chenghai, Shantou City, Guangdong Province, China

Tel: 0086-754-85354187 Fax: 0086-754-85300887

E-mail: info@ledgo.hk <http://www.ledgo.hk>