

Panasonic
ideas for life

P2HD

AG-HPX600

Memory Card Camera Recorder "P2 cam"



AVC ULTRA upgradable **AVC INTRA** **DVCPRO HD** **DVCPRO 60** **DVCPRO 1X**

Compact, Lightweight, High-Sensitivity Camera Recorder with Excellent Expandability and a Future Proof Design

Expandability

Networking
Proxy Recording
Wireless LAN
Ethernet LAN

Performance

Small and Lightweight
High Sensitivity and
High S/N Ratio
AVC-Intra Recording

Cinema Production

Variable Frame Rate
24PsF Output

Future Proof

AVC-ULTRA Codec
microP2 Card



This new concept P2 cam combines high cost-performance, easy operation, expandable functions, and a future proof design to meet needs in a wide range of uses, from image production to broadcasting. A 2/3-type shoulder-type model, it accommodates a variety of interchangeable lenses. And its compact body provides superb mobility with the industry's lowest weight*1 of approximately 2.8 kg (6.2 lb) for the main unit. Its newly developed MOS sensor attains high F12 sensitivity (at 59.94 Hz) and low noise with an S/N of 59 dB (standard). Multi HD/SD codecs, including AVC-Intra100/50, are equipped. In addition to these basic specifications, a wide range of functions are available as options, such as networking functions and a Variable Frame Rate (VFR). This enables low-cost system support for numerous and diverse applications. AG-HPX600 also supports new P2HD technologies such as the AVC-ULTRA family of codecs*2 and microP2 cards.*3 These and other features will allow the P2 cam to transition smoothly to the next generation of video systems.

*1: As a 2/3-type shoulder-type HD camera recorder (as of August 2012). *2: Scheduled for future release as a paid option, not all AVC-ULTRA formats will be supported. *3: Scheduled for future release as a paid upgrade.

Performance

The high-sensitivity MOS sensor and AVC-Intra codec enable high-quality, Full-HD 10 bit 4:2:2* recording.

* Using the AVC-Intra100 codec.

2/3-type Interchangeable Lenses

The 2/3-type bayonet mount interchangeable lens system lets you choose from a variety of 2/3-type zoom lenses for broadcasting and other professional uses from third-party manufacturers. Select the lens type and performance level that meet your needs.

New, High-Sensitivity F12 MOS Sensor

A newly developed 2/3-type MOS sensor offers levels of F12 sensitivity (at 59.94 Hz)* and low noise with an S/N of 59 dB (standard) that surpass many 2/3-type 3CCD cameras. High-speed scanning minimizes skewing distortion.

* F13 sensitivity at 50 Hz



Image of shooting with F12 sensitivity (AG-HPX600)



Image of shooting with F8 sensitivity (equivalent to the naked eye)

High-Quality Image Processing and Versatile Image Settings

- **CAC (Chromatic Aberration Compensation):** When using a CAC compatible lens, the small amount of circumjacent chromatic aberration (circumjacent blur) that is not corrected by the lens is compensated by this process.
- **DRS (Dynamic Range Stretch):** Suppresses blocked shadows and blown highlights to achieve a visually wide dynamic range.
*The DRS function does not operate in 1080/25p, 1080/24p or 1080/30p mode.
- **Advanced Flash Band Compensation (FBC):** High-precision flash band detection and compensation.
- **Gamma:** Select from 7-mode (HD NORM/LOW/SD NORM/HIGH/B. PRESS/CINE-LIKE D/CINE-LIKE V) gamma curves.
- **Digital image settings:** H Detail, V Detail, Detail Coring, Skin Tone Detail, Chroma Level, Chroma Phase, Color Temperature, Master Pedestal, Knee (LOW/MID/HIGH), Matrix (NORM1/NORM2/FLUO/CINE-LIKE).

Professional Shooting Functions

- Scan Reverse function for use with a cinema lens adaptor.
- Digital Zoom function for 2x and 4x close-ups.
- Variable Shutter Speed from 1/12 sec to 1/2000 sec plus Synchro Scan function.
- Four-position (CLEAR, 1/4 ND, 1/16 ND, 1/64 ND) optical neutral density filter wheel.

Standard-Equipped, High-Quality AVC-Intra Codecs



This advanced system maintains intra-frame compression based on the new MPEG-4 AVC/H.264 moving picture compression technology. It records in AVC-Intra100 mode (1920 x 1080,*¹ 10 bit, 4:2:2) for images with full-pixel HD and full sampling, and AVC-Intra50 mode (1440 x 1080,*¹ 10 bit, 4:2:0) for high-quality images at a low bit rate and for low-cost operation. The AG-HPX600 will also support the new codec, AVC-ULTRA*² in the future as a paid upgrade.

*¹: These figures are for 1080i/p mode. The AG-HPX600 also supports 720p mode.

*²: Not all AVC-ULTRA formats will be supported.



The 2/3-type bayonet mount interchangeable lens system

HD/SD Multi-Format and Multi-Codec Recording

- AVC Intra100/50: 1080/60i, 24pN, 30pN, 720/60p, 24pN, 30pN*
- DVCPRO HD: 1080/60i, 24p, 24pA, 30p, 720/60p, 24p, 30p*
- DVCPRO 50/DVCPRO/DV: 480/60i, 30p, 24p, 24pA*
- 50 Hz mode: 1080/50i, 25p, 25pN, 720/50p, 25p, 25pN, 576/50i, 25p

* 24p = 23.98p, 30p = 29.97p, 60p = 59.94p and 60i = 59.94i

48 kHz/16 bit, 4-Channel Digital Audio

The AG-HPX600 can record full 48 kHz/16 bit digital audio on all four channels. You can freely select the audio source for each channel, choosing from mic-in, line-in and wireless receiver.

P2 Card — Excellent Speed, Reliability, and Environmental Performance

- **Broadcast-use P2 card:** Offers high reliability to withstand impacts, vibrations, and temperature changes.
- **Quick start:** Lets you stand by with the power off, then start shooting immediately with no need for cueing.
- **Safety:** Automatically records onto blank card sections and protects against accidental data overwriting.
- **Re-use:** High durability and reliability allows years of repeated use.
- **Instant playback:** Files can be played or transferred as soon as the thumbnail images are displayed.
- **Instant editing:** No need for digitizing. P2 cards can be directly mounted on a PC*¹ for instant editing with a nonlinear editor and high-speed data transfer*² to a network server.

*¹: PCs must be installed with the P2 driver in order to mount P2 cards. For editing, PCs must be installed with P2-compatible editing software available from various companies. Read "Notes Regarding the Handling of P2 Files Using a PC" on the back page.

*²: The maximum transfer speed is 1.2Gbps. when using the P2 cards. Transfer speed is subject to change depending on the system configuration.

Versatile File-Based Recording Functions

- **Double Slot system:** Two P2 card slots allow continuous recording, card select (recording slot selection), and hot-swap recording (replacing a card during recording).
- **One-Clip rec mode:** Records up to 99 consecutive cuts as a single clip.
- **Loop rec:***¹ Repeatedly re-records while maintaining a recording of the most recent, predetermined period.
- **Pre-rec:***¹ Continuously stores footage prior to pressing Rec Start for recovery if desired.
- **Interval rec:***¹ Automatically records intermittently based on a set interval and recording time.
- **One-shot rec:***¹ A frame-shot recording function useful for producing animations.
- **Text Memo:***² Up to 100 memos can be posted onto a clip as bookmarks.
- **Shot Marker:***² Used to mark clips as OK, NG, etc.
- **Metadata:** Data with information such as operator's name, shooting location, and text memos can be added via an SD Memory Card.

*¹: These functions cannot be used during optional Variable Frame Rate recording.

*²: Shot marker and text memo cannot be used in loop rec, interval rec, or one-shot rec.

Functions

Comfortable operating functions, such as SmartUI, and a host of system functions are included in this compact, lightweight (approximately 2.8 kg (6.2 lb)) body.

The Lightest 2/3-type Shoulder-type Model

The AG-HPX600 is the lightest* in its class at approximately 2.8 kg (6.2 lb) for the main unit. This compact body provides superb mobility. It is also designed with excellent forward visibility.

* As a 2/3-type shoulder-type HD camera recorder (as of August 2012).

Low Power Consumption

Power consumption for the main unit is only 18 W. This is a reduction of about 50% from our previous model, the AJ-HPX2100 (36 W for the main unit only, with LCD off), which was released in 2007. The AG-HPX600 consumes only 22 W even with the optional AG-YDX600G Video Encoder Board and optional AG-YA600G HD/SD SDI Input Board mounted.

SmartUI — A New User Interface

This newly designed user interface consists of an LCD and a variety of switches. A large number of functions, including Scene File settings, Audio Level settings, Audio IN/OUT selection, Time Code settings, and MON/HDMI Output Video settings, are easy to recognize and can be set with only a few steps each.

Versatile Shooting Assist Functions

- **Focus Assist:** Press the Focus Assist button to expand the center section of the viewfinder screen for easier focusing.
- **Scene Files:** Select either of six preset files from the menu according to the shooting situation. The settings can also be stored onto an SD card.
- **Gain:** There is a three-position gain selector with a maximum gain value of +18 dB.
- **User Buttons:** Functions can be freely allocated to the three User buttons.
- **Shockless White Balance:** A smooth transition occurs when switching White Balance modes. This is effective, for example, when moving from outdoors to indoors.
- **WFM:** Simplified waveform and vectorscope display.
- **Zebra:** Select any two levels from among 50% to 109%, in 1% steps.
- **Mode check:** Displays a list of the camera settings.
- **Y-GET:** Measures brightness at center and displays numerical data.
- Auto White Balance with an auto tracking white function.
- User files can be saved to an SD card and shared with other cameras.
- Audio input level adjustment (front) can be switched on/off and allocated to desired channels.

New Color LCD Viewfinder

The newly designed, optional AG-CVF10G Color HD Viewfinder (cost-effective model) and AG-CVF15G Color HD Viewfinder (upper grade model) are 8.76 cm (3.45 inches) color LCD with approximately 920,000-dot resolution and a 16:9 aspect ratio. When opened, it serves as an LCD monitor. The optional 5.08 cm (2 inches) AJ-HVF21KG Monochrome HD Viewfinder can also be used.



Waveform (The above photo is AG-CVF10G)



A large number of functions can be quickly set on the "SmartUI".

Camera Remote System Compatibility

- **10-pin Remote Terminal:** Camera remote operation is enabled with the optional AG-EC4G Extension Remote Control Unit or AJ-RC10G Remote Control Unit.*
- **Camera Studio System:** The optional camera extension system (AG-CA300G Camera Adaptor and AG-BS300 Base Station) support low-cost studio integration.

* Only functions that are supported by the AG-HPX600 can be controlled.

HD SDI IN/OUT, HDMI OUT



- **SDI OUT (IN):** It outputs SDI with embedded audio. Backup recording operation can be interlinked with the Rec Start/Stop controls of an SDI input-equipped Panasonic recorder, such as the AG-HPD24. Adding the optional AG-YA600G HD/SD SDI Input Board makes it possible to switch SDI input with this terminal, for line recording.
- **HDMI OUT:** This terminal allows digital A/V output to a wide range of devices with both professional and consumer specifications.
- **MON OUT:** This terminal outputs separate from the SDI OUT terminal. It can also be set to output HD SDI, down-converted SD SDI, or VBS.
- **Aspect conversion:** The aspect ratio can be selected to Side Crop, Letter Box, or Squeeze mode when down-converting and outputting from SDI OUT/MON OUT terminals.

Other Interfaces

- **TC IN/OUT:** A built-in SMPTE time code generator/reader. IN/OUT selectable by menu settings.
- **GENLOCK IN:** For synchronized recording with a multi-camera system.
- **USB 2.0:** Equipped with both HOST (for connection to an HDD) and DEVICE (for connection to a PC/Mac) terminals.
- UniSlot® compatible wireless receiver slot (2 channels).
- **XLR audio input:** 2-channel mic/line inputs supporting 48V phantom power supply.
- Audio output terminals (pin jacks), 2 channels.
- Multiple battery support, including Anton Bauer.

* UniSlot® is a trademark of Ikegami Tsusinko Co., Ltd.



Rear Terminal



Audio Output (Right Side)



USB Terminal Left Side)

Expandability

Proxy Recording, Network Functions, and a Variable Frame Rate.
This Expandable System Lets You Add Only the Functions You Need.



Revolutionary Workflow with High-Resolution Proxy Video and Network Options



High-Resolution Proxy Video Supported

(With the optional AG-YDX600G Video Encoder Board)

With this option, the AG-HPX600 records proxy files onto SD/SDHC memory cards or onto P2 cards.* It supports high-quality video (Quick Time/H.264) and audio formats at a low bit rate. High-quality proxy files can be used for breaking news and other scenarios that would benefit from proxy workflows. Moreover, it streamlines the production workflow by allowing the editor to review the content details during offline editing.

* Proxy data cannot be recorded when using the Loop Rec or Interval Rec function. Proxy data is low-resolution video and audio data with time code, metadata, and other management data in a file format. The use of DCF Technologies is under license from Multi-Format, Inc.


Streaming with a Wireless or Wired LAN

(With the optional AG-SFU601G Upgrade Software Key and AJ-WM30 Wireless Module)

These options enable use of a wireless or wired (Ethernet) LAN. Proxy files*¹ can be streamed or viewed via a standard web browser on a PC/Mac, tablet, or smartphone.*² While viewing the streamed files, metadata can be added to the P2 files. Using a PC/Mac also enables a cloud-based workflow by uploading and sharing video data via a network.

*¹: The optional AG-YDX600G Video Encoder Board is required to use proxy video.

*²: For the latest information, see "Service and Support" on the Panasonic website (<http://pro-av.panasonic.net/>).

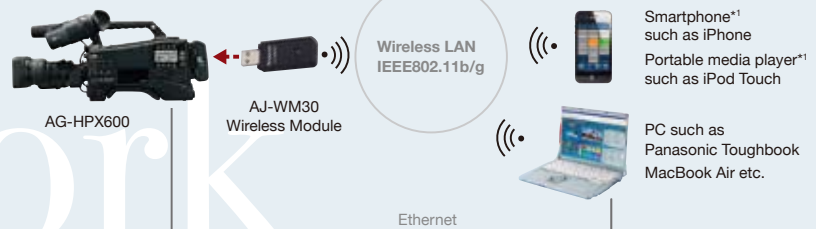

picture simulated

The VFR Option for Cinema Production Use

Variable Frame Rate Shooting and 24PsF Output (With the optional AG-SFU602G Production Package Upgrade Software Key)

In 720p mode, the frame rate can be set in the range of 1 fps-60 fps, and in 1080p mode it can be set to 1 fps-30 fps. This allows the use of undercranking and overcranking to create fast-motion and slow-motion effects. Either 24p/30p Native mode or over 60p mode can be selected for recording. In addition, the 24PsF format can be output from SDI OUT for uncompressed data recording.



Shown above is a sample of operation style.

Cinema

Future Proof

Compatible with the P2HD next-generation codec family
AVC-ULTRA and the new solid state recording media microP2

AVC ULTRA

AVC-ULTRA Upgrade Service

(A paid upgrade scheduled for future)

AG-HPX600 can be upgraded to support the AVC-ULTRA family of codecs to meet the variety of image production demands. The USB HOST interface can also be upgraded to the USB 3.0 high-speed transfer version at the same time.

* Not all AVC-ULTRA formats will be supported. The upgrade will require the replacement of a circuit board inside the camera recorder. The service will include charges for the new circuit board, the software upgrade, and labor.

microP2 Card Compatibility Upgrade


(A paid upgrade scheduled to begin in spring 2013)



The P2 card has evolved into the microP2 card (32 GB/64 GB), a new solid state recording media for broadcast use. While achieving the same compact size as the SD Memory Card and a dramatic reduction in cost, the new microP2 card also offers high-speed data transfer and high reliability.

* For the latest firmware, see "Service and Support" on the Panasonic website (<http://pro-av.panasonic.net/>).

Outline of the AVC-ULTRA Family of Codecs (Under Development)

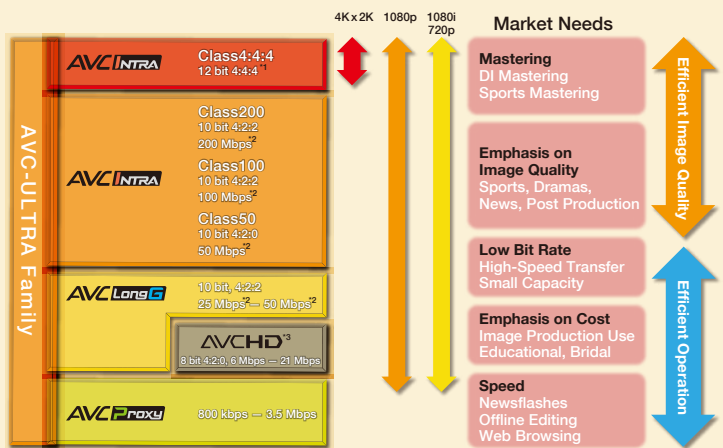

*1: The bit rate is under consideration. *2: The bit rate is approximate at 1080/60i. *3: AVCHD is not included in the AVC-ULTRA family.

OPTIONAL ACCESSORIES

As of August, 2012



AG-CVF10G **NEW**
Color HD View Finder
Open one way for LCD monitor viewing



AG-CVF15G **NEW**
(coming soon)
Color HD View Finder
Open two ways for LCD monitor viewing



AJ-HVF21KG
50.8 mm (2 inches)
HD EVF
59.94 Hz/50 Hz switchable



AG-MC200G
XLR Microphone



SHAN-TM700
Tripod Adaptor



AG-YDX600G **NEW**
Video Encoder Board




AG-YA600G **NEW**
HD/SD SDI Input Board



AJ-WM30
Wireless Module


CAMERA STUDIO SYSTEM

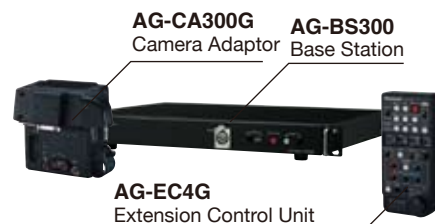

Transmits high-quality images and remote control signals for studio integration.



AJ-RC10G
Remote Control Unit
with 10 meters (32 feet)
remote control cable



AJ-C10050G
Remote Control Cable
(50 meters / 164 feet)

* Not available in some areas.

* The remote control unit can control only functions supported by the AG-HPX600. It cannot control unsupported keys or dials.

P2 Viewer 3.6
Viewing Software (download free)

P2 CMS 1.4
Content Management Software (download free)

P2 Viewer Plus **NEW**
Viewing Software (coming soon)
The new P2 viewing software compatible with both Windows/Mac OS.

* For P2 Viewer or P2 CMS download and operating requirement information, visit WEB site <http://pro-av.panasonic.net/> and click "P2 Support and Download"

The use of DCF Technologies is under license from Multi-Format, Inc.



AJ-P2E064FG **NEW**
AJ-P2E032FG **NEW**
AJ-P2E016FG **NEW**
Memory Card
(P2 card F series)



SD/SDHC Memory Card



AJ-SC900
Soft Carrying Case
*Not available in some area



SHAN-RC700
Rain Cover
*Not available in some area

Other Manufacturer's Products

Anton/Bauer Dionic Battery

Bound Cable for Camera Studio System
(between AG-BS300 and AG-CA300G)

[Canare]
V2PCS25-5CFWCE-SF-SC (25 meters / 82 feet)
V2PCS50-5CFWCE-SF-SC (50 meters / 164 feet)
V2PCS100-5CFWCE-SF-SC (100 meters / 328 feet)

Power Cable for Camera Studio System
(between AG-BS300 and AG-CA300G)

[Canare]
DC50V10-CE01PS-SC (50 meters / 164 feet)
DC100V10-CE01PS-SC (100 meters / 328 feet)

Canare Electric CO., Ltd.
<http://www.canare.co.jp/oversea/mainmenu.html>

AG-HPX600 SPECIFICATIONS

As of August, 2012

General Specification

Supply Voltage:	DC 12 V (DC 11 V to 17 V)
Power Consumption:	18 W (main unit only) 22 W (with AG-YDX600G and AG-YA600G)
Operating Temperature:	0 °C to 40 °C (32 °F to 104 °F)
Operating Humidity:	10% to 85% (no condensation)
Keeping Temperature:	−20 °C to 60 °C (−4 °F to 140 °F)
Weight:	Approx. 2.8 kg (6.2 lb) excluding battery and accessories
Dimensions (W x H x D):	144 mm x 267 mm x 350 mm (5-21/32 inches x 10-1/2 inches x 13-25/32 inches) excluding prominent parts

Camera Section

Pick-up Device:	2/3-type MOS x 1
Lens Mount:	2/3-type bayonet type
ND Filter:	4 position (Clear, 1/4ND, 1/16ND, 1/64ND)
Gain Selection*1:	−3 dB, 0 dB, 3 dB, 6 dB, 9 dB, 12 dB, 18 dB (18 dB: USER SW allocation)
Color Temperature Settings:	ATW, ATW LOCK, Ach, Bch, Preset 3200 K/Preset 5600 K/VAR (2400K to 9900K)
Shutter Speed: (Preset)	SYSTEM MODE = 59.94 Hz ●60i/60p mode: 1/60 (OFF) sec., 1/100 sec., 1/120 sec., 1/250 sec., 1/500 sec., 1/1000 sec., 1/2000 sec. ●30p mode: 1/30 (OFF) sec., 1/50 sec., 1/60 sec., 1/120 sec., 1/250 sec., 1/500 sec., 1/1000 sec. ●24p mode: 1/24 (OFF) sec., 1/50 sec., 1/60 sec., 1/120 sec., 1/250 sec., 1/500 sec., 1/1000 sec. SYSTEM MODE = 50 Hz ●50i/50p mode: 1/50 (OFF) sec., 1/60 sec., 1/120 sec., 1/250 sec., 1/500 sec., 1/1000 sec., 1/2000 sec. ●25p mode: 1/25 (OFF) sec., 1/50 sec., 1/60 sec., 1/120 sec., 1/250 sec., 1/500 sec., 1/1000 sec.
Shutter Speed: (Slow)	SYSTEM MODE = 59.94 Hz ●60i/60p mode: 1/15 sec., 1/30 sec. ●30p mode: 1/15 sec. ●24p mode: 1/12 sec. SYSTEM MODE = 50 Hz ●50i/50p mode: 1/12.5 sec., 1/25 sec. ●25p mode: 1/12.5 sec.
Shutter Speed: (Syncro Scan)	SYSTEM MODE = 59.94 Hz (SYNC SCAN TYPE = sec) ●60i/60p mode: 1/60.0 sec. to 1/249.8 sec. ●30p mode: 1/30.0 sec. to 1/249.8 sec. ●24p mode: 1/24.0 sec. to 1/249.8sec. SYSTEM MODE = 50 Hz (SYNC SCAN TYPE = sec) ●50i/50p mode: 1/50.0 sec. to 1/250.0 sec. ●25p mode: 1/25.0 sec. to 1/250.0 sec.
Shutter Open Angle:	SCENE FILE VFR = OFF 3 deg to 360 deg, 0.5 deg step select SCENE FILE VFR = ON*2 (FRAME RATE 12p or more) 3 deg to 360 deg, 0.5 deg step select SCENE FILE VFR = ON*2 (Less than FRAME RATE 12p) 3 deg to 22.5 deg, 0.5 deg step select 45 deg, 90 deg, 180 deg, 360 deg
Frame Rates*2: (59.94 Hz mode)	●1080: 1/2/4/6/9/12/15/18/20/21/22/24/25/26/27/28/30 (frames per second) 17 steps ●720: 1/2/4/6/9/12/15/18/20/21/22/24/25/26/27/28/ 30/32/34/36/40/44/48/54/60 (frames per second) 25 steps
Frame Rates*2: (50 Hz mode)	●1080: 1/2/4/6/9/12/15/18/20/21/22/23/24/25 (frames per second) 14 steps ●720: 1/2/4/6/9/12/15/18/20/21/22/23/24/25/26/27/ 28/30/32/34/37/42/45/48/50 (frames per second) 25 steps
Sensitivity*3:	F12 (2000 lx, 3200 K, 89.9% reflect, 1080/59.94i) F13 (2000 lx, 3200 K, 89.9% reflect, 1080/50i)
Video S/N*3:	59 dB (standard)
Digital Zoom:	x 2, x 4

Memory Card Recorder Section

Recording Media:	P2 card
System Formats:	1080/59.94i, 1080/23.98PsF*2, 720/59.94p, 480/59.94i, 1080/50i, 720/50p, 576/50i
Recording Video Signal:	1080/59.94i, 1080/29.97p, 1080/29.97pN, 1080/23.98p, 1080/23.98pA, 1080/23.98pN, 1080/50i, 1080/25p, 1080/25pN, 720/59.94p, 720/29.97p, 720/29.97pN, 720/23.98p, 720/23.98pN, 720/50p, 720/25p, 720/25pN, 480/59.94i, 480/29.97p, 480/23.98p, 480/23.98pA, 576/50i, 576/25p
Recording Formats:	AVC-Intra100/AVC-Intra50/DVCPRO HD/ DVCPRO 50/DVCPRO/DV formats switchable

Recording/Playback Time*4: with a 64 GB P2 card	AVC-Intra100/DVCPRO HD: AVC-Intra50/DVCPRO 50: DVCPRO/DV:	approx. 64 min. approx. 128 min. approx. 256 min.
Recording/Playback Time*4: with a 32 GB P2 card	AVC-Intra100/DVCPRO HD: AVC-Intra50/DVCPRO 50: DVCPRO/DV:	approx. 32 min. approx. 64 min. approx. 128 min.
Recording/Playback Time*4: with a 16 GB P2 card	AVC-Intra100/DVCPRO HD: AVC-Intra50/DVCPRO 50: DVCPRO/DV:	approx. 16 min. approx. 32 min. approx. 64 min.

Digital Video Specification

Recorded Video Signals:	AVC-Intra100/DVCPRO HD: Y: 74.1758 MHz, Pb/Pr: 37.0879 MHz (59.94 Hz) Y: 74.2500 MHz, Pb/Pr: 37.1250 MHz (50 Hz) DVCPRO 50: Y: 13.5 MHz, P Pb/Pr: 6.75 MHz DVCPRO: Y: 13.5 MHz, Pb/Pr: 3.375 MHz
Quantizing:	AVC-Intra100/AVC-Intra50: 10 bit DVCPRO HD/DVCPRO 50/DVCPRO/DV: 8 bit
Video Compression:	AVC-Intra100/AVC-Intra50: MPEG-4 AVC/H.264 Intra Profile DVCPRO HD: DV-Based Compression (SMPTE 370M) DVCPRO 50/DVCPRO: DV-Based Compression (SMPTE 314M) DV: DV Compression (IEC 61834-2)

Digital Audio Specification

Recording Audio Signal:	AVC-Intra100/AVC-Intra50: 48 kHz, 16 bit, 4CH DVCPRO HD/DVCPRO 50: 48 kHz, 16 bit, 4CH DVCPRO/DV: 48 kHz, 16 bit, 2CH/4CH switchable
Headroom:	20 dB/18 dB switching via menu

Video Input/Output

SDI OUT/IN (OP)*5:	BNCx1 HD SDI: 0.8 V [p-p], 75 Ω SD SDI: 0.8 V [p-p], 75 Ω
MON OUT:	BNCx1, HD SDI/SD SDI/VBS (Analog Composite) can be switched on SmatUI HD SDI: 0.8 V [p-p], 75 Ω / SD SDI: 0.8 V [p-p], 75 Ω / VBS: 1.0 V [p-p], 75 Ω
HDMI OUT:	HDMI x 1 (HDMI TypeA terminal), VIERA Link not supported

Audio Input/Output

AUDIO IN:	XLR (3 pin) x 2 LINE/MIC switchable, high impedance, LINE: 0 dBu, MIC: −50 dBu/−60 dBu (switching via menu) MIC +48 V ON/OFF (switchable)
MIC IN:	XLR (3 pin) x 1 +MIC/+48 V switchable, −40 dBu/−50 dBu/−60 dBu (switching via menu)
WIRELESS IN:	25 pin, D-SUB, −40 dBu 2CH supported
AUDIO OUT:	Pin jack x 2 (CH1/CH2), Output: 316 mV, 600 Ω
PHONES OUT:	ø3.5 mm stereo mini jack x 1
Speaker:	20 mm diameter x 1

Other Input/Output

GENLOCK IN:	BNC x 1, 1.0 V [p-p], 75 Ω
TC IN/OUT:	IN: BNC x 1, 0.5 V [p-p] to 8V [p-p], 10 kΩ OUT: BNC x 1, 2.0 V ±0.5 V [p-p], low impedance (IN/OUT switching via menu)
DC IN:	XLR x 1, 4 pin, DC 12 V (DC 11.0 V to 17.0 V)
DC OUT:	4 pin, DC 12 V (DC 11.0 V to 17.0 V), Max. 1.5 A
REMOTE:	10 pin
LENS:	12 pin
VF:	20 pin
LAN*6:	100BASE-TX/10BASE-T
USB 2.0 (HOST):	Type-A, 4 pin USB ver 2.0 Standard
USB 2.0 (DEVICE):	Type-B, 4 pin USB ver 2.0 Standard
USB 2.0 (HOST)*6:	Type-A, 4 pin USB ver 2.0 Standard for Wireless Module AJ-WM30

Included Accessories

Shoulder strap, Mount cap*, CD-ROM

*1: When SHOOTING MODE is NORMAL on SYSTEM SETUP MENU, −3 dB setting is treated as 0dB and 18dB setting can not be active. *2: AG-SFU602 Upgrade Software Key is required. *3: When SHOOTING MODE is LOW LIGHT on SYSTEM SETUP MENU *4: Time shown above is when you record a series of 1 shot onto P2 card. Depending on numbers of shots you record, time will get shorter than the number shown above. *5: Mounting the optional AG-YA600G HD/SD SDI Input Board makes this system SDI Input. (SDI OUT/IN switching via menu) *6: When Upgrade Software Key AG-SFU601 is installed, the network function of cable LAN and wireless LAN becomes effective. *7: It is attached to the main body.

Weight and dimensions shown are approximate. Specifications are subject to change without notice.



P2 Asset Support System

The free member's service program for P2HD/AVCCAM

Extensive information for video professionals

Thirsty for Knowledge?

No purchase necessary
Information services for members

- ▶ The latest technical information
- ▶ FAQs, user's voices
- ▶ Tool download

Always the best performance

Additional content with product
registration

- ▶ Firmware, utility downloads
- ▶ Quick inspection, service history
- ▶ Newsletters

Contact us through PASS

Direct answers to your inquiries. Sign up now (no purchase necessary)

http://panasonic.biz/sav/pass_e

P2HD

5 year extended warranty program

1st year Basic
Warranty

2nd year

3rd year

4th year

5th year with
the warranty program

Extended for free upon registration

* Availability of this extended service program and service
content may depend on country/region and model.

* A maximum 5 year or pre-specified hours of operation
from the date of purchase, whichever comes first.

* Not all repair work is covered by this extended warranty
program.

Informative product-related content also
available with equipment registration.

Please refer to the latest Non-linear Compatibility Information,
P2 Support, Download and Service Information, etc. at the following Panasonic web site.



<http://pro-av.panasonic.net/>

Notes Regarding the Handling of P2 Files Using a PC

Mounting and Transferring Files

The PC must be installed with the included P2 driver in order to recognize, copy and transfer P2 files. This driver is also necessary when using the PC card slot and when handling P2 files stored on a hard-disk device, such as the P2 store. The included P2 driver is compatible with Windows Vista, Windows XP, Windows 2000 and Mac OSX. For other operating requirements, refer to the P2 installation manual. The P2 driver and the P2 installation manual can be downloaded free from the following Panasonic website. Visit <https://www.pavc.panasonic.co.jp/pro-av/> and click "P2 Support and Download."

Preview and Nonlinear Editing

To preview (play) P2 files on a PC, it is necessary to install the P2 Viewer software (downloadable for free, for Windows only) or P2 CMS content management software (downloadable for free, for both Windows and Mac), both from Panasonic, or P2-compatible editing software available from other companies (for details, visit https://www.pavc.panasonic.co.jp/pro-av/sales_o/p2/partners.html). Note that each software places specific requirements on the operating environment, and the operating environment must meet additional requirements to play and edit HD content on Windows PCs and Macs. For P2 Viewer or P2 CMS download and operating requirement information, visit <https://www.pavc.panasonic.co.jp/pro-av/>. For operating requirements and details of other P2 editing software, visit the website of the relevant software manufacturer.

*P2HD, AVC-Intra, DVCPRO HD and DVCPRO 50 logo are registered trademarks of Panasonic Corporation. SD Logo is a trademark. SDHC logo marks are a registered trademarks. Quick Time is trademarks of Apple, Inc., registered in the U.S. and other countries.

Panasonic

Panasonic Corporation
Professional AV Business Unit
2-15 Matsuba-cho, Kadoma, Osaka 571-8503
Japan
<http://pro-av.panasonic.net/>

[Countries and Regions]

Argentina +54 1 308 1610
Australia +61 (0) 2 9491 7400
Bahrain +973 252292
Belgium +32 (0) 2 481 04 57
Brazil +55 11 3889 4035
Canada +1 905 624 5010
China +86 10 6515 8828
Hong Kong +852 2313 0888
Czech Republic +420 236 032 552/511
Denmark +45 43 20 08 57
Egypt +20 2 23938151
Finland, Latvia, Lithuania, Estonia +358 (9) 521 52 53
France +33 (0) 1 47 91 64 00
Germany, Austria, Switzerland +49 (0) 611 235 459
Greece +30 210 96 92 300
Hungary +36 (1) 382 60 60
India +91 120 247 1000
Indonesia +62 21 385 9449
Iran (Vida) +98 21 2271463
(Panasonic Office) +98 2188791102
Italy +39 02 6788 367
Jordan +962 6 5859801
Kazakhstan +7 727 298 0891
Korea +82 2 2106 6641

Kuwait +96 522431385
Lebanon +96 11665557
Malaysia +60 3 7809 7888
Mexico +52 55 5488 1000
Netherlands +31 73 64 02 577
New Zealand +64 9 272 0100
Norway +47 67 91 78 00
Pakistan +92 5370320 (SNT)
Palestine +972 2 2988750
Panama +507 229 2955
Peru +51 1 614 0000
Philippines +63 2 633 6163
Poland +48 (22) 338 1100
Portugal +351 21 425 77 04
Puerto Rico +1 787 750 4300
Romania +40 21 211 4855
Russia & CIS +7 495 6654205
Saudi Arabia +96 626444072
Singapore +65 6270 0110
Slovak Republic +421 (0) 2 52 92 14 23
Slovenia, Albania, Bulgaria, Serbia, Croatia, Bosnia, Macedonia, Montenegro +36 (1) 382 60 60
South Africa +27 11 3131622
Spain +34 (93) 425 93 00
Sweden +46 (8) 680 26 41
Syria +963 11 2318422/4

Taiwan +886 2 2227 6214
Thailand +66 2 731 8888
Turkey +90 216 578 3700
U.A.E. (for All Middle East) +971 4 8862142
Ukraine +380 44 4903437
U.K. +44(0)1344 70 69 13
U.S.A. +1 877 803 8492
Vietnam +848 38370280



JQA-Q443



Factories of Business Solutions Business Group have received ISO14001:2004-the Environmental Management System certification. (Except for 3rd party's peripherals.)